CFP2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY RX200 S2, Intel Xeon processor 3.20GHz, 2MB L2

SPECfp_rate2000 = 20.5

SPECfp_rate_base2000 = 20.5

SPEC license #: 22 | Tested by: Fujitsu Siemens Computers | Test date: Nov-2005 | Hardware Avail: Oct-2005 | Software Avail: Sep-2005

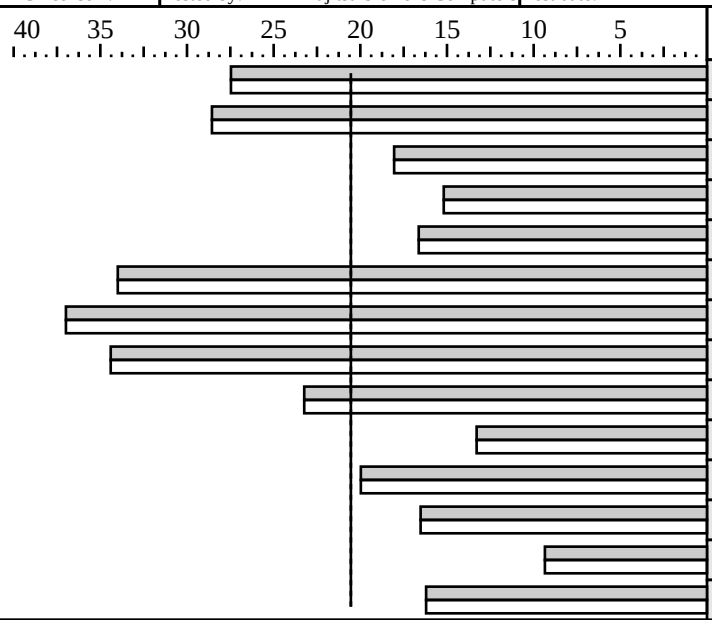

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
168.wupwise	2	135	27.5	2	135	27.5
171.swim	2	252	28.6	2	252	28.6
172.mgrid	2	231	18.0	2	231	18.0
173.applu	2	321	15.2	2	321	15.2
177.mesa	2	195	16.6	2	195	16.6
178.galgel	2	198	34.0	2	198	34.0
179.art	2	163	37.0	2	163	37.0
183.equake	2	87.7	34.4	2	87.7	34.4
187.facerec	2	190	23.2	2	190	23.2
188.ammp	2	384	13.3	2	384	13.3
189.lucas	2	232	20.0	2	232	20.0
191.fma3d	2	295	16.5	2	295	16.5
200.sixtrack	2	273	9.35	2	273	9.35
301.apsi	2	372	16.2	2	372	16.2

Hardware

CPU:	Intel Xeon processor 3.20GHz, 2MB L2, 800MHz system bus
CPU MHz:	3200
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 1 core/chip (Hyper-Threading Technology enabled)
CPU(s) orderable:	1,2
Parallel:	No
Primary Cache:	12k micro-ops I + 16KBD on chip, per core
Secondary Cache:	2048KB(I+D) on chip, per core
L3 Cache:	N/A
Other Cache:	N/A
Memory:	8x512 MB DDRII-RAM PC2-3200R
Disk Subsystem:	Seagate ST336753LC(U320 SCSI, 15krpm)
Other Hardware:	none

Software

Operating System:	Windows Server 2003 Enterprise Edition + SP1
Compiler:	Intel C and Fortran Compiler 9.0 Build 20050722Z (for 32-bit applications), Microsoft Visual Studio .Net 2003 7.1.3088 (for libraries), SmartHeap Library Version 7.4 from http://www.microquill.com
File System:	NTFS
System State:	Default

Notes/Tuning Information

```
GENERAL
+FDO: PASS1=-Qprof_gen  PASS2=-Qprof_use

Portability flags
   178.galgel:  -FI /F32000000

Base tuning flags
   for Fortran programs: -fast -Qansi_alias +FDO shlW32M.lib
   for C programs:       -fast +FDO shlW32M.lib

Peak tuning flags
   same as baseline (basepeak=true set globally)

New 32-bit Windows tools used, approved in May-2005

The system bus runs at 800 MHz
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

This result was measured with 32-bit binaries using the 32-bit version of the operating system.

For information about Fujitsu Siemens Computers in your country please see:
http://www.fujitsu-siemens.com/countries