CINT2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Velocity Micro

Gamer's Edge DualX, AMD Athlon(TM) 64 FX-60

SPECint_rate2000 = 41.1

SPECint_rate_base2000 = 35.7

SPEC license #: 49 | Tested by: AMD Austin, Texas | Test date: Feb-2006 | Hardware Avail: Feb-2006 | Software Avail: Sep-2005

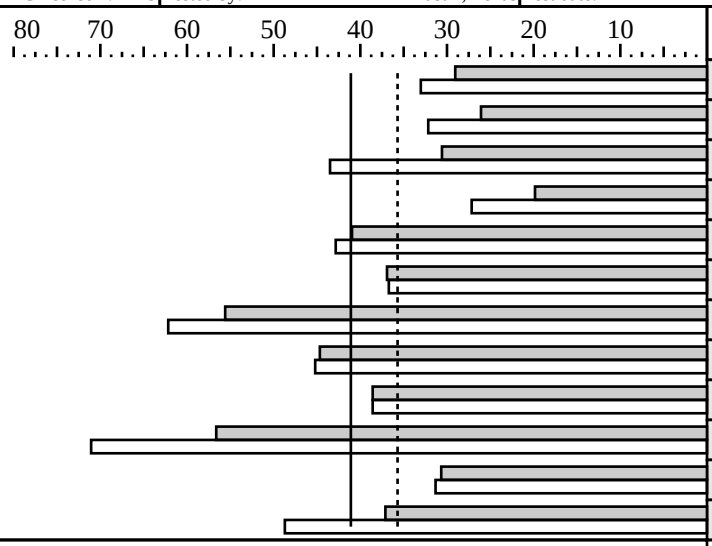

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
164.gzip	2	112	29.0	2	98.4	33.0
175.vpr	2	125	26.1	2	101	32.2
176.gcc	2	83.5	30.6	2	58.7	43.5
181.mcf	2	210	19.8	2	154	27.2
186.crafty	2	56.6	41.0	2	54.2	42.8
197.parser	2	113	36.9	2	114	36.7
252.eon	2	54.3	55.6	2	48.5	62.2
253.perlbmk	2	93.5	44.7	2	92.4	45.2
254.gap	2	66.2	38.6	2	66.2	38.6
255.vortex	2	77.8	56.6	2	62.0	71.1
256.bzip2	2	113	30.7	2	111	31.3
300.twolf	2	188	37.1	2	143	48.7

Hardware

CPU:	AMD Athlon(TM) 64 FX-60 (939-pin)
CPU MHz:	2600
FPU:	Integrated
CPU(s) enabled:	2 cores, 1 chip, 2 cores/chip
CPU(s) orderable:	1
Parallel:	no
Primary Cache:	64KBI + 64KBD (on chip) per core
Secondary Cache:	1024KB (I+D) (on chip) per core
L3 Cache:	N/A
Other Cache:	N/A
Memory:	2x512MB, Mushkin DDR400 CL2
Disk Subsystem:	SATA, 232 GB
Other Hardware:	None

Software

Operating System:	Microsoft Windows XP Home Edition SP2
Compiler:	Intel C++ 9.0 build 20050912Z for IA32 Microsoft Visual Studio .NET 7.0.9466 (libraries) MicroQuill Smartheap Library 7.0
File System:	NTFS
System State:	default

Notes/Tuning Information

```
Tested by Advanced Micro Devices
  shlW32M.lib is the SmartHeap library V7.0 from MicroQuill (www.microquill.com)
  +FDO: PASS1=-Qprof_gen  PASS2=-Qprof_use
  Portability:
    176.gcc:      -Dalloca=_alloca /F10000000
    186.crafty:   -DNT_i386
    253.perlbmk:  -DSPEC_CPU2000_NTOS -DPERLDLL /MT
    254.gap:      -DSYS_HAS_CALLOC_PROTO -DSYS_HAS_MALLOC_PROTO
  Baseline C:   -O3 -Qipo -Op +FDO
  Baseline C++: -O3 -Qipo -Qcxx-features +FDO
 Peak Tuning:
  164.gzip:     -O3 -Qipo -QxW +FDO
  175.vpr:      -O3 -Qipo -QxW +FDO
                -Qoption,c,-ip_ninl_max_stats=2000,-ip_ninl_max_total_stats=4500
  176.gcc:      -O3 -Qipo -QxW -Oi- -Qunroll3 +FDO
  181.mcf:      -O3 -Qipo -QaxN      +FDO
  186.crafty:   -O3 -Qipo -QxW +FDO
  197.parser:   -QxW +FDO -Oi- -Qipo
  252.eon:      -O3 -Qipo -QxW +FDO -Qansi_alias
               -Qoption,c,-ip_ninl_max_stats=2000,-ip_ninl_max_total_stats=4500
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
 253.perlbmk:  -O3 -Qipo -QxW +FDO
 254.gap:       basepeak = true
 255.vortex:   -O3 -Qipo -arch:SSE  +FDO -Oi- shlW32M.lib
               -Qoption,c,-ip_ninl_max_stats=2000,-ip_ninl_max_total_stats=4500
 256.bzip2:    -O3 -Qipo              -Qunroll2
 300.twolf:    -O3 -Qipo -QxW +FDO    -Qunroll3 shlW32M.lib -Qansi_alias
Mushkin HP3200 memory used in Dual Channel configuration.
Memory timings manually set in BIOS: CAS=2, Trc=12, 1T/2T Memory Timings=1T
BIOS rev 1014
```