CINT2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Supermicro

H8DSL-HTi Motherboard (AMD Opteron (TM) 254)

SPECint2000 = 1898

SPECint_base2000 = 1684

SPEC license #01176 | Tested by: Supermicro | Test date: Apr-2006 | Hardware Avail: Apr-2006 | Software Avail: Oct-2005

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
164.gzip	1400	104	1351	91.2	1536
175.vpr	1400	117	1196	94.1	1488
176.gcc	1100	77.5	1418	54.2	2029
181.mcf	1800	155	1162	124	1452
186.crafty	1000	53.5	1870	51.1	1955
197.parser	1800	105	1721	105	1714
252.eon	1300	50.4	2577	45.6	2853
253.perlbmk	1800	88.3	2039	86.8	2073
254.gap	1100	60.0	1833	60.0	1833
255.vortex	1900	74.2	2561	69.5	2732
256.bzip2	1500	103	1450	101	1478
300.twolf	3000	177	1692	135	2215

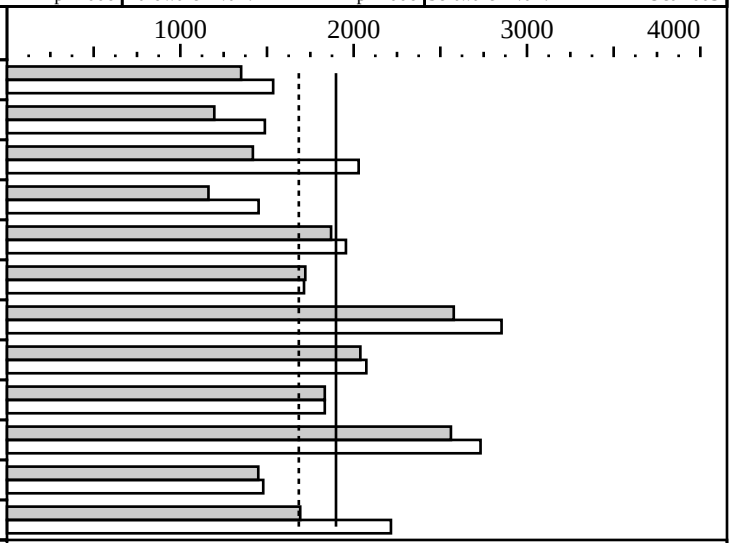

Hardware

CPU:	AMD Opteron (TM) 254
CPU MHz:	2800
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 1 core/chip
CPU(s) orderable:	1
Parallel:	no
Primary Cache:	64KBI + 64KBD on chip
Secondary Cache:	1024KB (I+D) on chip
L3 Cache:	N/A
Other Cache:	N/A
Memory:	4 X Apacer 78.A1071.404, 2GB DDR-400 CL3 ECC Reg
Disk Subsystem:	1 X IDE, Seagate ST3250823A 250GB
Other Hardware:	None

Software

Operating System:	Windows server 2003 Enterprise Edition 32-bit Version w/ Service Pack 1
Compiler:	Intel C++ 9.0 build 20050912Z for IA32 Microsoft Visual Studio .NET 2003 7.0.9466 (libraries) MicroQuill Smartheap Library 7.0
File System:	NTFS
System State:	default

Notes/Tuning Information

```
shlW32M.lib is the SmartHeap library V7.0 from MicroQuill (www.microquill.com)
+FDO: PASS1=-Qprof_gen  PASS2=-Qprof_use
Portability:
  176.gcc:      -Dalloca=_alloca /F10000000
  186.crafty:   -DNT_i386
  253.perlbmk:  -DSPEC_CPU2000_NTOS -DPERLDLL /MT
  254.gap:      -DSYS_HAS_CALLOC_PROTO -DSYS_HAS_MALLOC_PROTO
Baseline C:   -O3 -Qipo -Op +FDO
Baseline C++: -O3 -Qipo -Qcxx-features +FDO
Peak Tuning:
 164.gzip:     -O3 -Qipo -QxW +FDO
 175.vpr:      -O3 -Qipo -QxW +FDO
               -Qoption,c,-ip_ninl_max_stats=2000,-ip_ninl_max_total_stats=4500
 176.gcc:      -O3 -Qipo -QxW -Oi- -Qunroll3 +FDO
 181.mcf:      -O3 -Qipo -QaxN      +FDO
 186.crafty:   -O3 -Qipo -QxW +FDO
 197.parser:         -QxW +FDO -Oi- -Qipo
 252.eon:      -O3 -Qipo -QxW +FDO -Qansi_alias
              -Qoption,c,-ip_ninl_max_stats=2000,-ip_ninl_max_total_stats=4500
 253.perlbmk:  -O3 -Qipo -QxW +FDO
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
254.gap:      -O3 -Qipo -QxW +FDO
255.vortex:   -O3 -Qipo -arch:SSE  +FDO -Oi- shlW32M.lib
              -Qoption,c,-ip_ninl_max_stats=2000,-ip_ninl_max_total_stats=4500
256.bzip2:    -O3 -Qipo               -Qunroll2
300.twolf:    -O3 -Qipo -QxW +FDO      -Qunroll3 shlW32M.lib -Qansi_alias
Tested systm was built with chassis SC813T-500C,
Product description located as of:
http://www.supermicro.com/Aplus/motherboard/Opteron/HT1000/H8DSL-HTi.cfm
To ensure system stability, a 420W (minimum) ATX power supply [4-pin (+12V), 8-pin (+12V) and 24-pin are required]
Other Configuration Notes
The start /b /wait /affinity command is used to bind CPU(s) to processes.
```