SPEC SFS 1 Summary (Side 1 of 2) 097.LADDIS

Sun Microsystems Inc.
Ultra Enterprise 3001/2

Server Hardware

CPU, Memory, & Power

Model No.	Ultra Enterprise 3001
CPU	250MHz UltraSPARC II
# of CPUs	2
Primary Cache	16KBI+16KBD on chip
Secondary Cache	1024KB(I+D) off chip
Other Cache	None
Memory	1GB
UPS	None
Other hardware	None

Server Software

OS Version	Solaris 2.5.1
Other software	None
File system	UFS

Load Generators (LGs)

Number of Load Generators:	6
Processes Per Load Generator:	10
Biod_Max_Reads:	3
Biod_Max_Writes:	5

Disk Subsystem & Filesystems

(Full Configuration on Side 2)

Num Disk Controllers	3
Num Disks	61
Num File Systems	60

Network Subsystem

(Full Configuration On Side 2)

Num Net Controllers	3
Num Networks	3
Type Network	100MBit Sun FastEthernet

Server Tuning

(Also see Notes/Tuning below)

Buffer Cache Size	Dynamic
Num NFS Daemons	255
Fileset Size	24.0GB

NFS Throughput SPECnfs_A93 Ops/Sec	Avg. Response Time (NFS) Milliseconds
422	3.5
846	3.6
1267	4.1
1688	4.4
2108	5.1
2529	5.6
2958	6.5
3388	7.6
3814	9.6
4203	22.0
4205	22.1

Hardware Availability: Jan-97 **Software Availability:** May-96

License #: 6 **Tested:** Nov-96 **By:** Sun **Of:** Mountain View

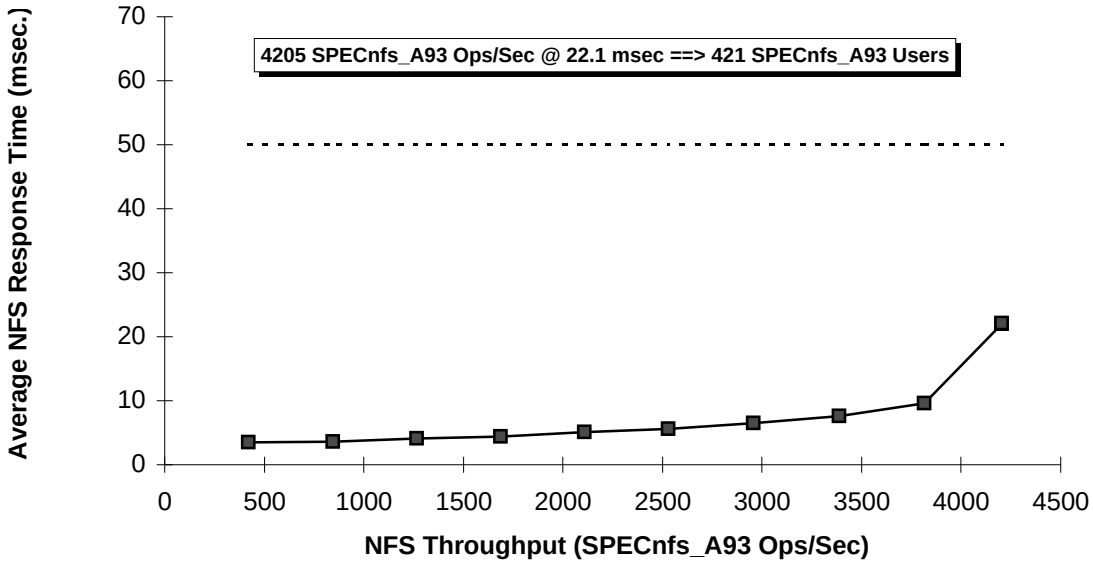

Notes/Summary Of Tuning Parameters: (Continued on Side 2 of 2)

IGNORE_KERNEL_PREEMPTION=1
ncsize=131072
bufhwm=131072

SSA fast_write enabled

SPEC SFS 1 Summary (Side 2 of 2) 097.LADDIS

Sun Microsystems Inc.
Ultra Enterprise 3001/2

Detailed Server Description

Network Subsystem

1 Sun FastEthernet (N1): 2 LGs
2 Sun FastEthernet (N2): 2 LGs
3 Sun FastEthernet (N3): 2 LGs

Disk Subsystem & Filesystems

Controller 1: On-board SCSI-2
Disks: 1 2GB 7200rpm

Controller 2-3: Fiber Channel SBus (FC25/S)
Fiber Channel Optical Module (FC25/OM)
Disks: SPARCstorage Array 102 w/ 30 2GB 7200rpm drives
Contents 2: F1-F30
Contents 3: F31-F60

Detailed Load Generator (LG) Description

Load Gen. Type	*Model*	*# of CPUs*	*RAM*	*OS*	*Compiler*
LG1	Ultra1-170	1	64MB	Solaris 2.5.1	SC3.0

Testbed Configuration

Load Gen. #	*Load Gen. Type*	*Network*	*Target File Systems*	*Notes*
1	LG1	N1	F1,F7,...,F55	default
2	LG1	N1	F2,F8,...,F56	default
3	LG1	N2	F3,F9,...,F57	default
4	LG1	N2	F4,F10,...,F58	default
5	LG1	N3	F5,F11,...,F59	default
6	LG1	N3	F6,F12,...,F60	default

Notes/Summary Of Tuning Parameters: (Continued from Side 1 of 2)