



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Quanta Cloud Technology

(Test Sponsor: Quanta Computer Inc.)

QuantaGrid D43K-1U  
(AMD EPYC 7763, 2.45 GHz)

**SPECrate®2017\_fp\_base = 636**

**SPECrate®2017\_fp\_peak = Not Run**

CPU2017 License: 9050


Test Sponsor: Quanta Computer Inc.

Tested by: Quanta Computer Inc.

**Test Date:** Jun-2021

**Hardware Availability:** Mar-2021

**Software Availability:** Mar-2021

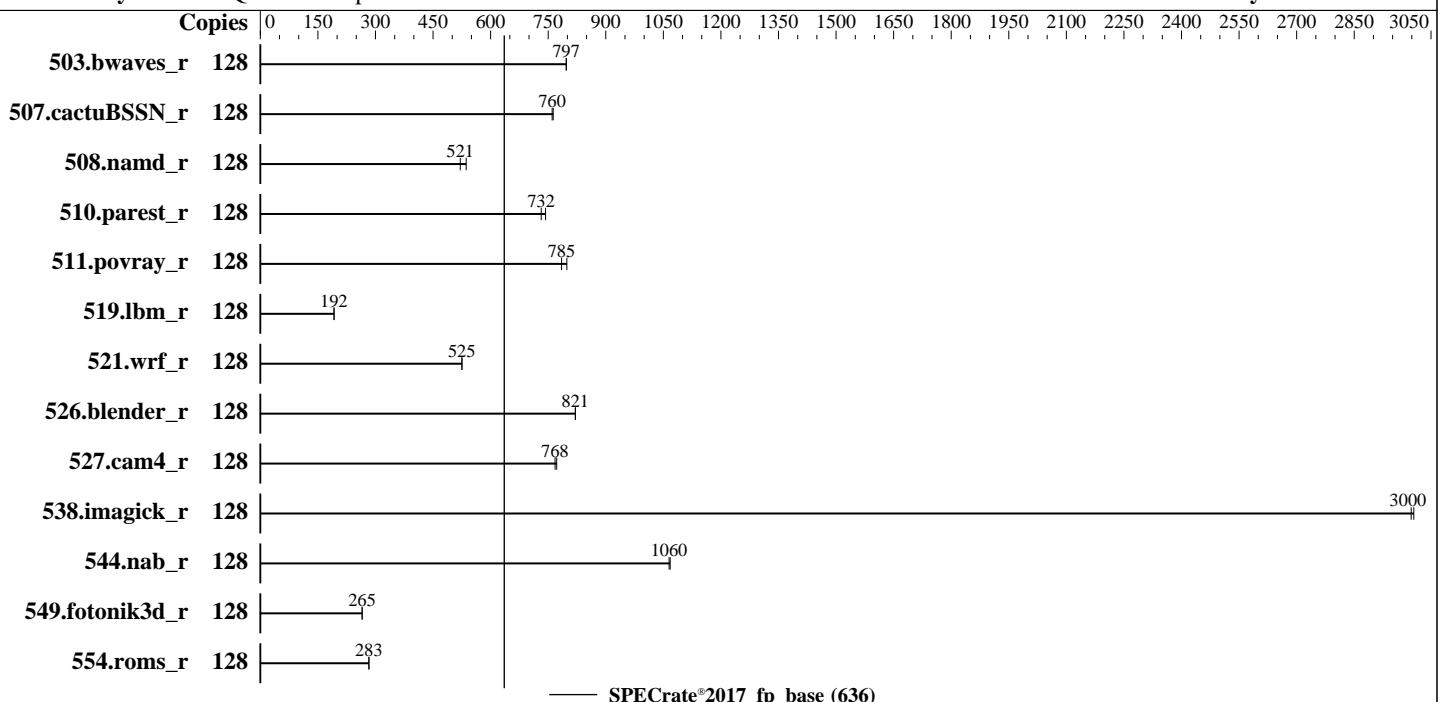

## Hardware

CPU Name: AMD EPYC 7763  
Max MHz: 3500  
Nominal: 2450  
Enabled: 128 cores, 2 chips, 2 threads/core  
Orderable: 1,2 chips  
Cache L1: 32 KB I + 32 KB D on chip per core  
L2: 512 KB I+D on chip per core  
L3: 256 MB I+D on chip per chip, 32 MB shared / 8 cores  
Other: None  
Memory: 2 TB (16 x 128 GB 4DRx4 PC4-3200AA-L)  
  
Storage: 1 x 1.92TB SATA SSD  
Other: None

## Software

OS: Red Hat Enterprise Linux release 8.3 (Ootpa)  
Compiler: Kernel 4.18.0-240.el8.x86\_64  
Parallel: C/C++/Fortran: Version 3.0.0 of AOCC  
Firmware: No  
File System: Version 3C03 released Apr-2021  
System State: xfs  
Base Pointers: Run level 3 (multi-user)  
Peak Pointers: 64-bit  
Other: Not Applicable  
Power Management: jemalloc: jemalloc memory allocator library v5.1.0  
BIOS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Quanta Cloud Technology

(Test Sponsor: Quanta Computer Inc.)

QuantaGrid D43K-1U  
(AMD EPYC 7763, 2.45 GHz)

**SPECrate®2017\_fp\_base = 636**

**SPECrate®2017\_fp\_peak = Not Run**

CPU2017 License: 9050

Test Date: Jun-2021

Test Sponsor: Quanta Computer Inc.

Hardware Availability: Mar-2021

Tested by: Quanta Computer Inc.

Software Availability: Mar-2021

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	128	<b>1611</b>	<b>797</b>	1610	797											
507.cactusBSSN_r	128	212	763	<b>213</b>	<b>760</b>											
508.namd_r	128	<b>233</b>	<b>521</b>	227	536											
510.parest_r	128	<b>458</b>	<b>732</b>	451	743											
511.povray_r	128	<b>381</b>	<b>785</b>	374	799											
519.lbm_r	128	702	192	<b>703</b>	<b>192</b>											
521.wrf_r	128	546	525	<b>546</b>	<b>525</b>											
526.blender_r	128	<b>238</b>	<b>821</b>	237	821											
527.cam4_r	128	<b>292</b>	<b>768</b>	290	772											
538.imagick_r	128	106	3010	<b>106</b>	<b>3000</b>											
544.nab_r	128	202	1070	<b>202</b>	<b>1060</b>											
549.fotonik3d_r	128	1880	265	<b>1881</b>	<b>265</b>											
554.roms_r	128	718	283	<b>719</b>	<b>283</b>											

**SPECrate®2017\_fp\_base = 636**

**SPECrate®2017\_fp\_peak = Not Run**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Quanta Cloud Technology

(Test Sponsor: Quanta Computer Inc.)

QuantaGrid D43K-1U  
(AMD EPYC 7763, 2.45 GHz)

SPECrate®2017\_fp\_base = 636

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9050

Test Date: Jun-2021

Test Sponsor: Quanta Computer Inc.

Hardware Availability: Mar-2021

Tested by: Quanta Computer Inc.

Software Availability: Mar-2021

## Operating System Notes (Continued)

To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,  
'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
    "/cpu2017/amd_rate_aocc300_milan_B_lib/lib;/cpu2017/amd_rate_aocc300_mil
     an_B_lib/lib32:"
MALLOC_CONF = "retain:true"
```

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 7742 CPU + 1TiB Memory using OpenSUSE 15.2

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v4.8.2 in RHEL 7.4 (No options specified)

jemalloc 5.1.0 is available here:

<https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2>

## Platform Notes

BIOS Configuration

SMT Control set to Enable

NUMA nodes per socket set to NPS4

Pwr and Perf Profile set to Performance

Determinism Control set to Manual

Determinism Slider set to Power

cTDP Control set to Manual

cTDP set to 280

Package Power Limit Control set to Manual

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Quanta Cloud Technology

(Test Sponsor: Quanta Computer Inc.)

QuantaGrid D43K-1U  
(AMD EPYC 7763, 2.45 GHz)

SPECrate®2017\_fp\_base = 636

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9050

Test Sponsor: Quanta Computer Inc.

Tested by: Quanta Computer Inc.

Test Date: Jun-2021

Hardware Availability: Mar-2021

Software Availability: Mar-2021

## Platform Notes (Continued)

IOMMU set to Enable

Sysinfo program /cpu2017/bin/sysinfo  
Rev: r6538 of 2020-09-24 e8664e66d2d7080afeaa89d4b38e2f1c  
running on localhost.localdomain Wed Jun 30 07:25:58 2021

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : AMD EPYC 7763 64-Core Processor
  2 "physical id"s (chips)
  256 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 64
  siblings : 128
  physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
  25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
  53 54 55 56 57 58 59 60 61 62 63
  physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
  25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
  53 54 55 56 57 58 59 60 61 62 63
```

From lscpu:

```
Architecture:           x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:             Little Endian
CPU(s):                256
On-line CPU(s) list:   0-255
Thread(s) per core:    2
Core(s) per socket:    64
Socket(s):              2
NUMA node(s):           16
Vendor ID:              AuthenticAMD
CPU family:             25
Model:                 1
Model name:             AMD EPYC 7763 64-Core Processor
Stepping:               1
CPU MHz:                1711.058
CPU max MHz:            2450.0000
CPU min MHz:            1500.0000
BogoMIPS:               4890.70
Virtualization:         AMD-V
L1d cache:              32K
L1i cache:              32K
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Quanta Cloud Technology

(Test Sponsor: Quanta Computer Inc.)

QuantaGrid D43K-1U  
(AMD EPYC 7763, 2.45 GHz)

**SPECrate®2017\_fp\_base = 636**

**SPECrate®2017\_fp\_peak = Not Run**

CPU2017 License: 9050

**Test Date:** Jun-2021

Test Sponsor: Quanta Computer Inc.

**Hardware Availability:** Mar-2021

Tested by: Quanta Computer Inc.

**Software Availability:** Mar-2021

## Platform Notes (Continued)

```
L2 cache: 512K
L3 cache: 32768K
NUMA node0 CPU(s): 0-7,128-135
NUMA node1 CPU(s): 8-15,136-143
NUMA node2 CPU(s): 16-23,144-151
NUMA node3 CPU(s): 24-31,152-159
NUMA node4 CPU(s): 32-39,160-167
NUMA node5 CPU(s): 40-47,168-175
NUMA node6 CPU(s): 48-55,176-183
NUMA node7 CPU(s): 56-63,184-191
NUMA node8 CPU(s): 64-71,192-199
NUMA node9 CPU(s): 72-79,200-207
NUMA node10 CPU(s): 80-87,208-215
NUMA node11 CPU(s): 88-95,216-223
NUMA node12 CPU(s): 96-103,224-231
NUMA node13 CPU(s): 104-111,232-239
NUMA node14 CPU(s): 112-119,240-247
NUMA node15 CPU(s): 120-127,248-255

Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmpf perf_pni pclmulqdq
monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c
rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb
cat_13 cdp_13 invpcid_single hw_pstate sme ssbd mba sev ibrs ibpb stibp vmmcall
fsgsbase bmil avx2 smep bmi2 erms invpcid cqmq rdt_a rdseed adx smap clflushopt clwb
sha_ni xsaveopt xsavec xgetbv1 xsavecr cqmq_l1c cqmq_occur_l1c cqmq_mbm_total
cqmq_mbm_local clzero irperf xsaveerptr wbnoinvd amd_ppin arat npt lbrv svm_lock
nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold
v_vmsave_vmlload vgif umip pku ospke vaes vpclmulqdq rdpid overflow_recov succor smca
```

```
/proc/cpuinfo cache data
cache size : 512 KB
```

```
From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
physical chip.
```

```
available: 16 nodes (0-15)
node 0 cpus: 0 1 2 3 4 5 6 7 128 129 130 131 132 133 134 135
node 0 size: 128248 MB
node 0 free: 128135 MB
node 1 cpus: 8 9 10 11 12 13 14 15 136 137 138 139 140 141 142 143
node 1 size: 128966 MB
node 1 free: 128851 MB
node 2 cpus: 16 17 18 19 20 21 22 23 144 145 146 147 148 149 150 151
node 2 size: 128950 MB
node 2 free: 128840 MB
node 3 cpus: 24 25 26 27 28 29 30 31 152 153 154 155 156 157 158 159
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Quanta Cloud Technology

(Test Sponsor: Quanta Computer Inc.)

QuantaGrid D43K-1U  
(AMD EPYC 7763, 2.45 GHz)

SPECrate®2017\_fp\_base = 636

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9050

Test Date: Jun-2021

Test Sponsor: Quanta Computer Inc.

Hardware Availability: Mar-2021

Tested by: Quanta Computer Inc.

Software Availability: Mar-2021

## Platform Notes (Continued)

```
node 3 size: 128958 MB
node 3 free: 128851 MB
node 4 cpus: 32 33 34 35 36 37 38 39 160 161 162 163 164 165 166 167
node 4 size: 128968 MB
node 4 free: 128729 MB
node 5 cpus: 40 41 42 43 44 45 46 47 168 169 170 171 172 173 174 175
node 5 size: 128956 MB
node 5 free: 128808 MB
node 6 cpus: 48 49 50 51 52 53 54 55 176 177 178 179 180 181 182 183
node 6 size: 128978 MB
node 6 free: 128838 MB
node 7 cpus: 56 57 58 59 60 61 62 63 184 185 186 187 188 189 190 191
node 7 size: 128948 MB
node 7 free: 128818 MB
node 8 cpus: 64 65 66 67 68 69 70 71 192 193 194 195 196 197 198 199
node 8 size: 128960 MB
node 8 free: 128839 MB
node 9 cpus: 72 73 74 75 76 77 78 79 200 201 202 203 204 205 206 207
node 9 size: 128954 MB
node 9 free: 128845 MB
node 10 cpus: 80 81 82 83 84 85 86 87 208 209 210 211 212 213 214 215
node 10 size: 128970 MB
node 10 free: 128625 MB
node 11 cpus: 88 89 90 91 92 93 94 95 216 217 218 219 220 221 222 223
node 11 size: 128970 MB
node 11 free: 128826 MB
node 12 cpus: 96 97 98 99 100 101 102 103 224 225 226 227 228 229 230 231
node 12 size: 128956 MB
node 12 free: 128837 MB
node 13 cpus: 104 105 106 107 108 109 110 111 232 233 234 235 236 237 238 239
node 13 size: 128964 MB
node 13 free: 128843 MB
node 14 cpus: 112 113 114 115 116 117 118 119 240 241 242 243 244 245 246 247
node 14 size: 128924 MB
node 14 free: 128688 MB
node 15 cpus: 120 121 122 123 124 125 126 127 248 249 250 251 252 253 254 255
node 15 size: 128968 MB
node 15 free: 128796 MB
node distances:
node 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
 0: 10 11 12 12 12 12 12 12 32 32 32 32 32 32 32 32
 1: 11 10 12 12 12 12 12 12 32 32 32 32 32 32 32 32
 2: 12 12 10 11 12 12 12 12 32 32 32 32 32 32 32 32
 3: 12 12 11 10 12 12 12 12 32 32 32 32 32 32 32 32
 4: 12 12 12 12 10 11 12 12 32 32 32 32 32 32 32 32
 5: 12 12 12 12 11 10 12 12 32 32 32 32 32 32 32 32
 6: 12 12 12 12 12 12 10 11 32 32 32 32 32 32 32 32
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Quanta Cloud Technology

(Test Sponsor: Quanta Computer Inc.)

QuantaGrid D43K-1U  
(AMD EPYC 7763, 2.45 GHz)

**SPECrate®2017\_fp\_base = 636**

**SPECrate®2017\_fp\_peak = Not Run**

CPU2017 License: 9050

**Test Date:** Jun-2021

Test Sponsor: Quanta Computer Inc.

**Hardware Availability:** Mar-2021

Tested by: Quanta Computer Inc.

**Software Availability:** Mar-2021

## Platform Notes (Continued)

7:	12	12	12	12	12	12	11	10	32	32	32	32	32	32	32	32	32	32	32	32	32	32
8:	32	32	32	32	32	32	32	32	10	11	12	12	12	12	12	12	12	12	12	12	12	12
9:	32	32	32	32	32	32	32	32	11	10	12	12	12	12	12	12	12	12	12	12	12	12
10:	32	32	32	32	32	32	32	32	12	12	10	11	12	12	12	12	12	12	12	12	12	12
11:	32	32	32	32	32	32	32	32	12	12	11	10	12	12	12	12	12	12	12	12	12	12
12:	32	32	32	32	32	32	32	32	12	12	12	12	10	11	12	12	12	12	12	12	12	12
13:	32	32	32	32	32	32	32	32	12	12	12	12	11	10	12	12	12	12	12	12	12	12
14:	32	32	32	32	32	32	32	32	12	12	12	12	12	12	12	12	10	11	11	10	11	11
15:	32	32	32	32	32	32	32	32	12	12	12	12	12	12	12	11	10	10	11	10	11	10

From /proc/meminfo

```
MemTotal:           2113072860 kB
HugePages_Total:        0
Hugepagesize:       2048 kB
```

/sbin/tuned-adm active

```
Current active profile: throughput-performance
```

/sys/devices/system/cpu/cpu\*/cpufreq/scaling\_governor has performance

From /etc/\*release\* /etc/\*version\*

os-release:

```
NAME="Red Hat Enterprise Linux"
VERSION="8.3 (Ootpa)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="8.3"
PLATFORM_ID="platform:el8"
PRETTY_NAME="Red Hat Enterprise Linux 8.3 (Ootpa)"
ANSI_COLOR="0;31"
redhat-release: Red Hat Enterprise Linux release 8.3 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.3 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.3:ga
```

uname -a:

```
Linux localhost.localdomain 4.18.0-240.el8.x86_64 #1 SMP Wed Sep 23 05:13:10 EDT 2020
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Quanta Cloud Technology

(Test Sponsor: Quanta Computer Inc.)

QuantaGrid D43K-1U  
(AMD EPYC 7763, 2.45 GHz)

**SPECrate®2017\_fp\_base = 636**

**SPECrate®2017\_fp\_peak = Not Run**

CPU2017 License: 9050

Test Sponsor: Quanta Computer Inc.

Tested by: Quanta Computer Inc.

**Test Date:** Jun-2021

**Hardware Availability:** Mar-2021

**Software Availability:** Mar-2021

## Platform Notes (Continued)

CVE-2017-5753 (Spectre variant 1):

seccomp  
Mitigation: usercopy/swaps  
barriers and \_\_user pointer  
sanitization

CVE-2017-5715 (Spectre variant 2):

Mitigation: Full AMD retrpoline,  
IBPB: conditional, IBRS\_FW, STIBP:  
always-on, RSB filling

CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected

CVE-2019-11135 (TSX Asynchronous Abort): Not affected

run-level 3 Jun 30 07:23

SPEC is set to: /cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sdb3	xfs	1.7T	34G	1.6T	3%	/

From /sys/devices/virtual/dmi/id

Vendor:	Quanta Cloud Technology Inc.
Product:	QuantaGrid D43K-1U

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

16x Micron Technology 72ASS16G72LZ-3G2B3	128 GB	4 rank	3200
16x Unknown	Unknown		

BIOS:

BIOS Vendor:	American Megatrends International, LLC.
BIOS Version:	3C03
BIOS Date:	04/28/2021
BIOS Revision:	5.22
Firmware Revision:	5.15

(End of data from sysinfo program)

## Compiler Version Notes

```
=====
C           | 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)
-----
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Quanta Cloud Technology

(Test Sponsor: Quanta Computer Inc.)

QuantaGrid D43K-1U  
(AMD EPYC 7763, 2.45 GHz)

SPECrate®2017\_fp\_base = 636

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9050

Test Sponsor: Quanta Computer Inc.

Tested by: Quanta Computer Inc.

Test Date: Jun-2021

Hardware Availability: Mar-2021

Software Availability: Mar-2021

## Compiler Version Notes (Continued)

InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

=====

C++ | 508.namd\_r(base) 510.parest\_r(base)

AMD clang version 12.0.0 (CLANG: AOCC\_3.0.0-Build#78 2020\_12\_10) (based on  
LLVM Mirror.Version.12.0.0)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

=====

C++, C | 511.povray\_r(base) 526.blender\_r(base)

AMD clang version 12.0.0 (CLANG: AOCC\_3.0.0-Build#78 2020\_12\_10) (based on  
LLVM Mirror.Version.12.0.0)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

AMD clang version 12.0.0 (CLANG: AOCC\_3.0.0-Build#78 2020\_12\_10) (based on  
LLVM Mirror.Version.12.0.0)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

=====

C++, C, Fortran | 507.cactuBSSN\_r(base)

AMD clang version 12.0.0 (CLANG: AOCC\_3.0.0-Build#78 2020\_12\_10) (based on  
LLVM Mirror.Version.12.0.0)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

AMD clang version 12.0.0 (CLANG: AOCC\_3.0.0-Build#78 2020\_12\_10) (based on  
LLVM Mirror.Version.12.0.0)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

AMD clang version 12.0.0 (CLANG: AOCC\_3.0.0-Build#78 2020\_12\_10) (based on  
LLVM Mirror.Version.12.0.0)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Quanta Cloud Technology

(Test Sponsor: Quanta Computer Inc.)

QuantaGrid D43K-1U  
(AMD EPYC 7763, 2.45 GHz)

SPECrate®2017\_fp\_base = 636

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9050

Test Sponsor: Quanta Computer Inc.

Tested by: Quanta Computer Inc.

Test Date: Jun-2021

Hardware Availability: Mar-2021

Software Availability: Mar-2021

## Compiler Version Notes (Continued)

=====  
Fortran | 503.bwaves\_r(base) 549.fotonik3d\_r(base) 554.roms\_r(base)  
=====

AMD clang version 12.0.0 (CLANG: AOCC\_3.0.0-Build#78 2020\_12\_10) (based on

LLVM Mirror.Version.12.0.0)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

  
-----

=====  
Fortran, C | 521.wrf\_r(base) 527.cam4\_r(base)  
=====

AMD clang version 12.0.0 (CLANG: AOCC\_3.0.0-Build#78 2020\_12\_10) (based on  
LLVM Mirror.Version.12.0.0)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

AMD clang version 12.0.0 (CLANG: AOCC\_3.0.0-Build#78 2020\_12\_10) (based on  
LLVM Mirror.Version.12.0.0)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

  
-----

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Quanta Cloud Technology

(Test Sponsor: Quanta Computer Inc.)

QuantaGrid D43K-1U  
(AMD EPYC 7763, 2.45 GHz)

SPECrate®2017\_fp\_base = 636

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9050

Test Sponsor: Quanta Computer Inc.

Tested by: Quanta Computer Inc.

Test Date: Jun-2021

Hardware Availability: Mar-2021

Software Availability: Mar-2021

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64  
507.cactuBSSN\_r: -DSPEC\_LP64  
508.namd\_r: -DSPEC\_LP64  
510.parest\_r: -DSPEC\_LP64  
511.povray\_r: -DSPEC\_LP64  
519.lbm\_r: -DSPEC\_LP64  
521.wrf\_r: -DSPEC\_CASE\_FLAG -Mbyteswapi -DSPEC\_LP64  
526.blender\_r: -funsigned-char -D\_BOOL\_DEFINED -DSPEC\_LP64  
527.cam4\_r: -DSPEC\_CASE\_FLAG -DSPEC\_LP64  
538.imagick\_r: -DSPEC\_LP64  
544.nab\_r: -DSPEC\_LP64  
549.fotonik3d\_r: -DSPEC\_LP64  
554.roms\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

```
-m64 -fno -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-lcim-vrp -mllvm -reduce-array-computations=3 -z muldefs
-lamdlibm -ljemalloc -lflang -lflangrti
```

C++ benchmarks:

```
-m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -fno
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -mllvm -enable-partial-unswitch
-mllvm -unroll-threshold=100 -finline-aggressive
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -convert-pow-exp-to-int=false
-z muldefs -lamdlibm -ljemalloc -lflang -lflangrti
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-enable-x86-prefetching
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Quanta Cloud Technology

(Test Sponsor: Quanta Computer Inc.)

QuantaGrid D43K-1U  
(AMD EPYC 7763, 2.45 GHz)

SPECrate®2017\_fp\_base = 636

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9050

Test Sponsor: Quanta Computer Inc.

Tested by: Quanta Computer Inc.

Test Date: Jun-2021

Hardware Availability: Mar-2021

Software Availability: Mar-2021

## Base Optimization Flags (Continued)

Fortran benchmarks (continued):

```
-Wl,-mllvm -Wl,-enable-licm-vrp -flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Hz,1,0x1 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -Kieee -Mrecursive
-mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -z muldefs -lamdlibm -ljemalloc
-lflang -lflangrti
```

Benchmarks using both Fortran and C:

```
-m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -Hz,1,0x1
-Kieee -Mrecursive -mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop -z muldefs
-lamdlibm -ljemalloc -lflang -lflangrti
```

Benchmarks using both C and C++:

```
-m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -flto
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -enable-partial-unswitch -mllvm -unroll-threshold=100
-finline-aggressive -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -convert-pow-exp-to-int=false
-z muldefs -lamdlibm -ljemalloc -lflang -lflangrti
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++98 -mno-adx -mno-sse4a
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Quanta Cloud Technology

(Test Sponsor: Quanta Computer Inc.)

QuantaGrid D43K-1U  
(AMD EPYC 7763, 2.45 GHz)

SPECrate®2017\_fp\_base = 636

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9050

Test Sponsor: Quanta Computer Inc.

Tested by: Quanta Computer Inc.

Test Date: Jun-2021

Hardware Availability: Mar-2021

Software Availability: Mar-2021

## Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

```
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -fno-rtti
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fvec/libc=AMDLIBM -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-lcmm-vrp -mllvm -reduce-array-computations=3
-mllvm -enable-partial-unswitch -mllvm -unroll-threshold=100
-finline-aggressive -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -convert-pow-exp-to-int=false
-Hz,1,0x1 -Kieee -Mrecursive -mllvm -fuse-tile-inner-loop
-funroll-loops -mllvm -lsr-in-nested-loop -z muldefs -lamdlibm
-ljemalloc -lflang -lflangrti
```

## Base Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

Benchmarks using both Fortran and C:

```
-Wno-unused-command-line-argument
```

Benchmarks using both C and C++:

```
-Wno-unused-command-line-argument
```

Benchmarks using Fortran, C, and C++:

```
-Wno-unused-command-line-argument
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc300-flags-B2.html>

[http://www.spec.org/cpu2017/flags/Quanta-Computer-Inc-amd-speccpu-setting-v4\\_AMD\\_MILAN.html](http://www.spec.org/cpu2017/flags/Quanta-Computer-Inc-amd-speccpu-setting-v4_AMD_MILAN.html)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Quanta Cloud Technology

(Test Sponsor: Quanta Computer Inc.)

QuantaGrid D43K-1U  
(AMD EPYC 7763, 2.45 GHz)

SPECrate®2017\_fp\_base = 636

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9050

Test Sponsor: Quanta Computer Inc.

Tested by: Quanta Computer Inc.

Test Date: Jun-2021

Hardware Availability: Mar-2021

Software Availability: Mar-2021

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc300-flags-B2.xml>

[http://www.spec.org/cpu2017/flags/Quanta-Computer-Inc-amd-speccpu-setting-v4\\_AMD\\_MILAN.xml](http://www.spec.org/cpu2017/flags/Quanta-Computer-Inc-amd-speccpu-setting-v4_AMD_MILAN.xml)

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.7 on 2021-06-30 07:25:57-0400.

Report generated on 2021-07-21 15:37:03 by CPU2017 PDF formatter v6442.

Originally published on 2021-07-20.