CFP2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Hewlett-Packard Company
hp server rp7400

SPECfp_rate2000 = 32.1

SPECfp_rate_base2000 = 29.6

SPEC license #: 3 | Tested by: HP | Test date: Aug-2001 | Hardware Avail: Sep-2001 | Software Avail: Sep-2001

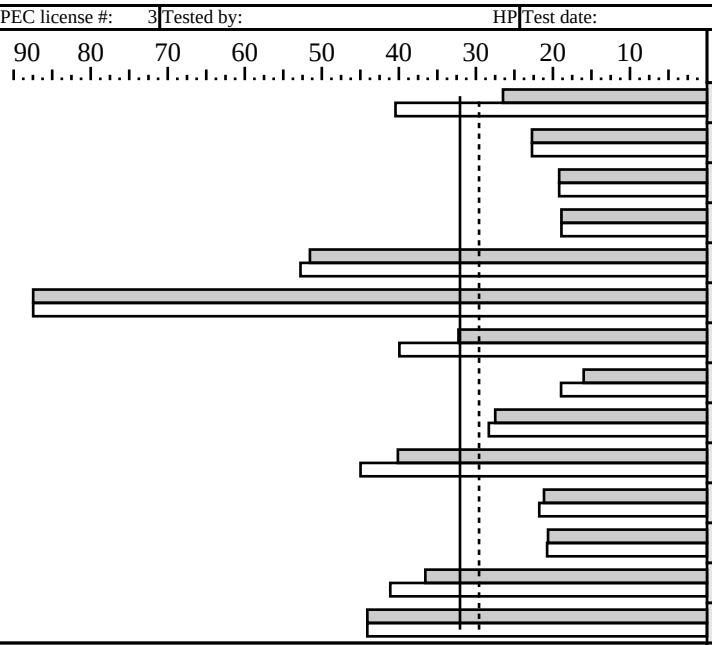

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
168.wupwise	8	561	26.5	8	367	40.4
171.swim	8	1266	22.7	8	1266	22.7
172.mgrid	8	871	19.2	8	871	19.2
173.applu	8	1031	18.9	8	1031	18.9
177.mesa	8	252	51.5	8	246	52.8
178.galgel	8	308	87.5	8	308	87.5
179.art	8	748	32.3	8	604	39.9
183.equake	8	754	16.0	8	637	18.9
187.facerec	8	641	27.5	8	623	28.3
188.ammp	8	509	40.1	8	454	45.0
189.lucas	8	877	21.2	8	852	21.8
191.fma3d	8	944	20.6	8	939	20.8
200.sixtrack	8	279	36.6	8	248	41.1
301.apsi	8	547	44.1	8	547	44.1

Hardware

CPU:	PA-8700
CPU MHz:	750
FPU:	Integrated
CPU(s) enabled:	8 cores, 8 chips, 1 core/chip
CPU(s) orderable:	1-8
Parallel:	No
Primary Cache:	0.75MBI + 1.5MBD on chip
Secondary Cache:	None
L3 Cache:	None
Other Cache:	None
Memory:	16GB
Disk Subsystem:	2x9GB SCSI disk
Other Hardware:	None

Software

Operating System:	B.11.11.0109.6 HP-UX 11i, September 2001 HWE patches
Compiler:	HP ANSI C 11.11.03 aC++ C.03.30.02 Fortran90 11.11.40 PHSS_24207 libm patch
File System:	HFS
System State:	Multi-user

Notes/Tuning Information

```
Portability Flags:
  178.galgel:  +source=fixed

Base Flags:
  f90: +O3 +Onofltacc -Wl,-a,archive -Wl,+FPD
  C:   +I/+P +O4 +Odataprefetch -Wl,-a,archive

Peak Flags:

  168.wupwise: +cat +O3 +Odataprefetch +Onofltacc
               -Wl,+FPD -Wl,-a,archive
  171.swim:    basepeak=true
  172.mgrid:   basepeak=true
  173.applu:   basepeak=true
  177.mesa:    +I/+P +Oall +Odataprefetch +Opromote_indirect_calls
               -Wl,+FPD -Wl,-a,archive
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
    178.galgel:  basepeak=true
    179.art:     +I/+P +Oall +Onodataprefetch +Onofltacc
                 +Optrs_strongly_typed +Opromote_indirect_calls
                 -Wl,+FPD -Wl,-a,archive
    183.equake:  +O4 +Olibcalls +Odataprefetch +Optrs_strongly_typed
                 +Opromote_indirect_calls
                 -Wl,+FPD -Wl,-a,archive
    187.facerec: +cat +O3 +Ofastaccess
                 -Wl,+FPD -Wl,-a,archive
    188.ammp:    +I/+P +Oall +Odataprefetch +Optrs_strongly_typed
                 +Opromote_indirect_calls
                 -Wl,+FPD -Wl,-a,archive
    189.lucas:   +O3 +Onoinline
                 -Wl,+FPD -Wl,-a,archive
    191.fma3d:   +O3 +Onolimit
                 -Wl,+FPD -Wl,-a,archive
    200.sixtrack: +cat +O3 +Onolibcalls +Onolimit +Onoinline
                  +Onodataprefetch
                 -Wl,+FPD -Wl,-a,archive
    301.apsi:    basepeak=true
    ONESTEP=true for 168.wupwise, 187.facerec, 200.sixtrack

  System tunables:

     vps_pagesize 4096, vps_ceiling 16384
     dbc_min_pct 20, dbc_max_pct 20
     maxdsiz 2063835136, maxssiz 401604608
```