SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3455 (AMD Opteron 2222 SE)

SPECfp®2006 = 14.8

SPECfp_base2006 = 14.1

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Jul-2007
Hardware Availability: Apr-2007
Software Availability: Mar-2007

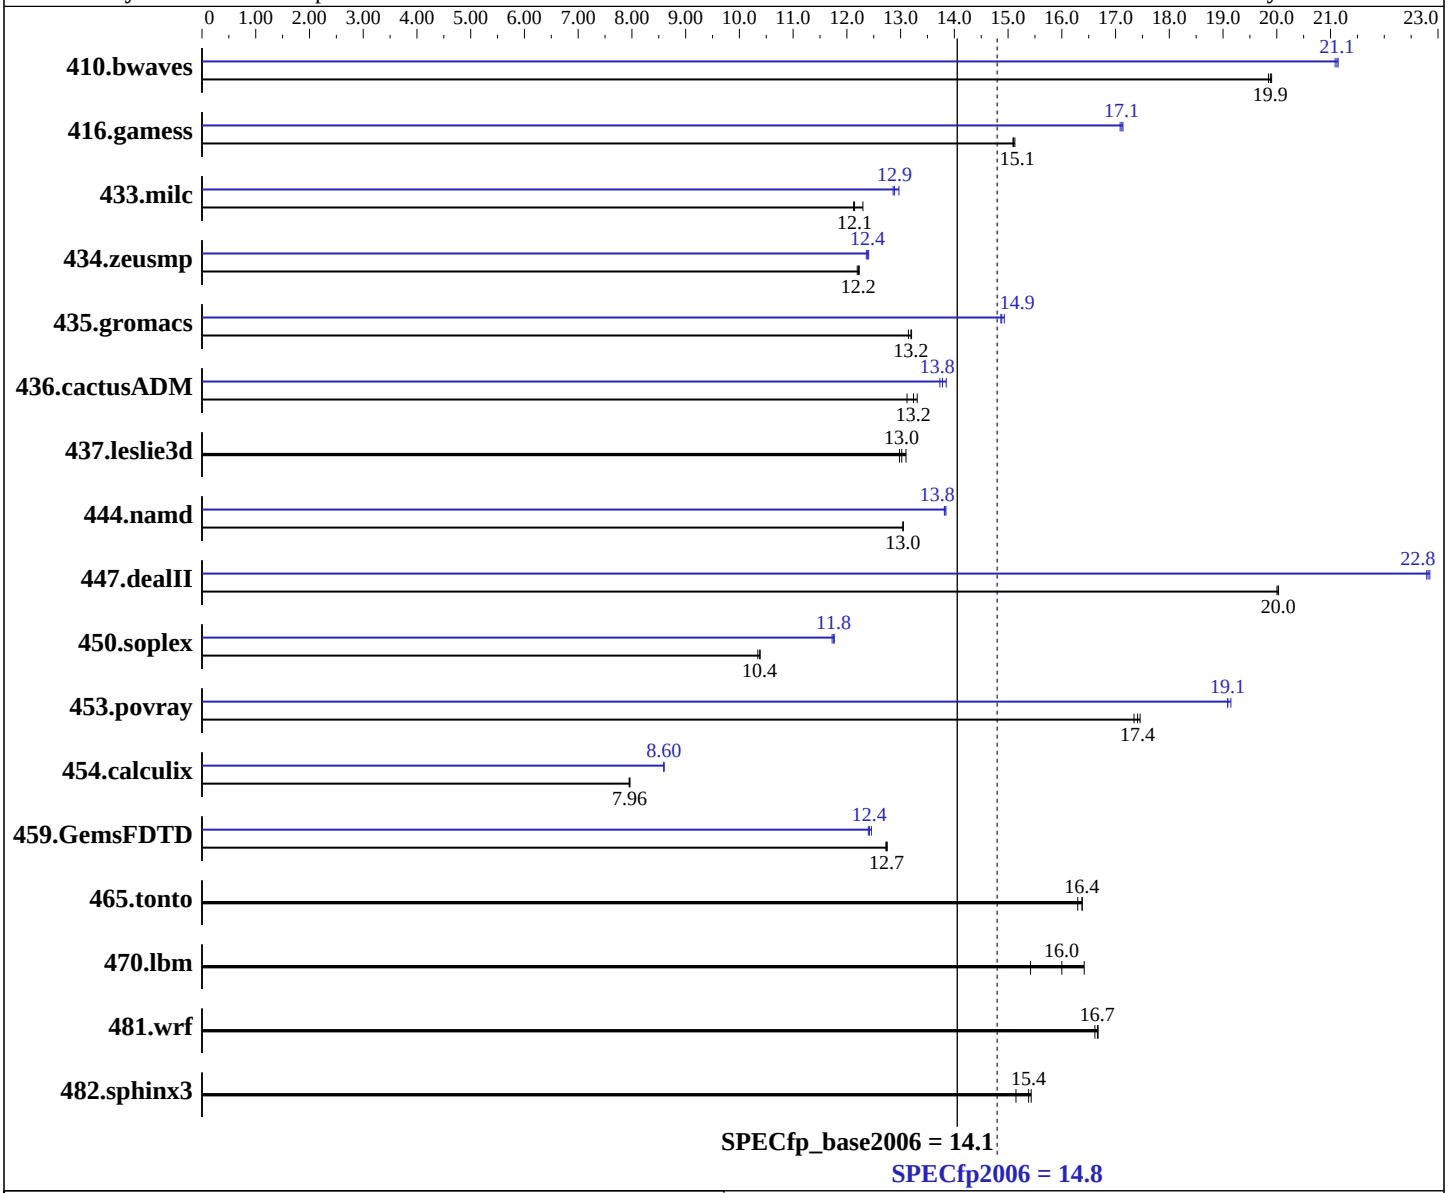

Hardware

CPU Name:	AMD Opteron 2222 SE
CPU Characteristics:	
CPU MHz:	3000
FPU:	Integrated
CPU(s) enabled:	4 cores, 2 chips, 2 cores/chip
CPU(s) orderable:	1, 2 chips
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	1 MB I+D on chip per core

Continued on next page

Software

Operating System:	SLES 10 (x86_64), 2.6.16.21-0.8-smp
Compiler:	QLogic PathScale Compiler Suite, Release 3.0
Auto Parallel:	No
File System:	ext3
System State:	Multi-user, run level 3
Base Pointers:	64-bit
Peak Pointers:	32/64-bit

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3455 (AMD Opteron 2222 SE)

SPECfp2006 = 14.8

SPECfp_base2006 = 14.1

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Jul-2007
Hardware Availability: Apr-2007
Software Availability: Mar-2007

L3 Cache: None
Other Cache: None
Memory: 16 GB (8 x 2GB DDR2-5300 ECC)
Disk Subsystem: 1 x 160 GB Serial ATA, 7200 RPM
Other Hardware: None

Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	685	19.8	**684**	**19.9**	683	19.9	645	21.1	**644**	**21.1**	643	21.1
416.gamess	**1297**	**15.1**	1297	15.1	1294	15.1	1146	17.1	1142	17.1	**1144**	**17.1**
433.milc	757	12.1	**756**	**12.1**	746	12.3	**712**	**12.9**	714	12.9	708	13.0
434.zeusmp	744	12.2	**745**	**12.2**	746	12.2	**735**	**12.4**	736	12.4	734	12.4
435.gromacs	541	13.2	**541**	**13.2**	543	13.1	**480**	**14.9**	480	14.9	478	14.9
436.cactusADM	**903**	**13.2**	911	13.1	898	13.3	870	13.7	863	13.8	**867**	**13.8**
437.leslie3d	718	13.1	**722**	**13.0**	724	13.0	718	13.1	**722**	**13.0**	724	13.0
444.namd	615	13.0	**615**	**13.0**	615	13.0	**580**	**13.8**	581	13.8	579	13.8
447.dealII	**571**	**20.0**	571	20.0	572	20.0	**501**	**22.8**	502	22.8	501	22.8
450.soplex	803	10.4	806	10.3	**804**	**10.4**	**710**	**11.8**	709	11.8	711	11.7
453.povray	307	17.3	305	17.5	**306**	**17.4**	**279**	**19.1**	279	19.1	278	19.1
454.calculix	1036	7.96	**1037**	**7.96**	1038	7.95	960	8.60	960	8.59	**960**	**8.60**
459.GemsFDTD	832	12.8	**833**	**12.7**	834	12.7	856	12.4	**854**	**12.4**	852	12.5
465.tonto	604	16.3	**601**	**16.4**	601	16.4	604	16.3	**601**	**16.4**	601	16.4
470.lbm	837	16.4	**859**	**16.0**	891	15.4	837	16.4	**859**	**16.0**	891	15.4
481.wrf	**670**	**16.7**	670	16.7	672	16.6	**670**	**16.7**	670	16.7	672	16.6
482.sphinx3	1263	15.4	**1267**	**15.4**	1287	15.1	1263	15.4	**1267**	**15.4**	1287	15.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

```
 taskset utility used to bind CPU(s) to processes
DSPEC_CPU_TABLE_WORKAROUND was used for portability when compiling 447.dealII
due to compilation being performed on SLES 9 SP3
```

Base Compiler Invocation

C benchmarks:
`pathcc`

C++ benchmarks:
`pathCC`

Continued on next page

Base Compiler Invocation (Continued)

Fortran benchmarks:
pathf95

Benchmarks using both Fortran and C:
pathcc pathf95

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64 -DSPEC_CPU_TABLE_WORKAROUND
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-Ofast

C++ benchmarks:
-Ofast

Fortran benchmarks:
-Ofast -OPT:malloc_alg=1

Benchmarks using both Fortran and C:
-Ofast -OPT:malloc_alg=1

Base Other Flags

C benchmarks:
-IPA:max_jobs=2

Continued on next page

Base Other Flags (Continued)

C++ benchmarks:
`-IPA:max_jobs=2`

Fortran benchmarks:
`-IPA:max_jobs=2`

Benchmarks using both Fortran and C:
`-IPA:max_jobs=2`

Peak Compiler Invocation

C benchmarks:
`pathcc`

C++ benchmarks:
`pathCC`

Fortran benchmarks:
`pathf95`

Benchmarks using both Fortran and C:
`pathcc pathf95`

Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
416.gamess: `-DSPEC_CPU_LP64`
433.milc: `-DSPEC_CPU_LP64`
434.zeusmp: `-DSPEC_CPU_LP64`
435.gromacs: `-DSPEC_CPU_LP64`
436.cactusADM: `-DSPEC_CPU_LP64 -fno-second-underscore`
437.leslie3d: `-DSPEC_CPU_LP64`
444.namd: `-DSPEC_CPU_LP64`
447.dealII: `-DSPEC_CPU_TABLE_WORKAROUND`
453.povray: `-DSPEC_CPU_LP64`
454.calculix: `-DSPEC_CPU_LP64`
459.GemsFDTD: `-DSPEC_CPU_LP64`
465.tonto: `-DSPEC_CPU_LP64`
470.lbm: `-DSPEC_CPU_LP64`
481.wrf: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -fno-second-underscore`
482.sphinx3: `-DSPEC_CPU_LP64`

Peak Optimization Flags

C benchmarks:

433.milc: `-Ofast -CG:cflow=off -LNO:prefetch=1 -OPT:malloc_alg=1`

470.lbm: `basepeak = yes`

482.sphinx3: `basepeak = yes`

C++ benchmarks:

444.namd: `-fb_create fbdata`(pass 1) `-fb_opt fbdata`(pass 2) `-Ofast -fno-exceptions`

447.dealII: `-Ofast -INLINE:aggressive=on -LNO:opt=0 -OPT:alias=disjoint -m32 -fno-exceptions`

450.soplex: `-fb_create fbdata`(pass 1) `-fb_opt fbdata`(pass 2) `-m32 -O3 -OPT:IEEE_arith=3 -CG:load_exe=0 -CG:movnti=1 -LNO:minvariant=off -LNO:prefetch=1 -fno-exceptions`

453.povray: `-fb_create fbdata`(pass 1) `-fb_opt fbdata`(pass 2) `-Ofast -fno-fast-math`

Fortran benchmarks:

410.bwaves: `-fb_create fbdata`(pass 1) `-fb_opt fbdata`(pass 2) `-O3 -OPT:Ofast -OPT:IEEE_arith=3 -LNO:blocking=off -LNO:ignore_feedback=off`

416.gamess: `-fb_create fbdata`(pass 1) `-fb_opt fbdata`(pass 2) `-O2 -OPT:Ofast -OPT:ro=3 -OPT:unroll_size=256`

434.zeusmp: `-Ofast -CG:local_fwd_sched=on -LNO:blocking=off -LNO:interchange=off -LNO:fu=10 -LNO:full_unroll_outer=on`

437.leslie3d: `basepeak = yes`

459.GemsFDTD: `-Ofast -LNO:fission=2 -LNO:prefetch=0`

465.tonto: `basepeak = yes`

Benchmarks using both Fortran and C:

435.gromacs: `-O3 -OPT:rsqrt=2 -OPT:ro=3`

436.cactusADM: `-fb_create fbdata`(pass 1) `-fb_opt fbdata`(pass 2) `-O3 -LNO:prefetch=3 -LNO:prefetch_ahead=5 -LNO:ou_prod_max=10 -LNO:full_unroll=5 -ipa`

Continued on next page

Peak Optimization Flags (Continued)

454.calculix: `-Ofast -LNO:simd=0 -WOPT:mem_opnds=on`

481.wrf: `basepeak = yes`

Peak Other Flags

C benchmarks:
`-IPA:max_jobs=2`

C++ benchmarks:
`-IPA:max_jobs=2`

Fortran benchmarks:
`-IPA:max_jobs=2`

Benchmarks using both Fortran and C:
`-IPA:max_jobs=2`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.13.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.13.xml`

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Sep 13 11:25:23 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 21 August 2007.