



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint®_rate2006 = Not Run

IBM System x3550 (Intel Xeon X5460)

SPECint_rate_base2006 = 113

CPU2006 license: 11


Test date: Nov-2007

Test sponsor: IBM Corporation

Hardware Availability: Jan-2008

Tested by: IBM Corporation

Software Availability: Nov-2007

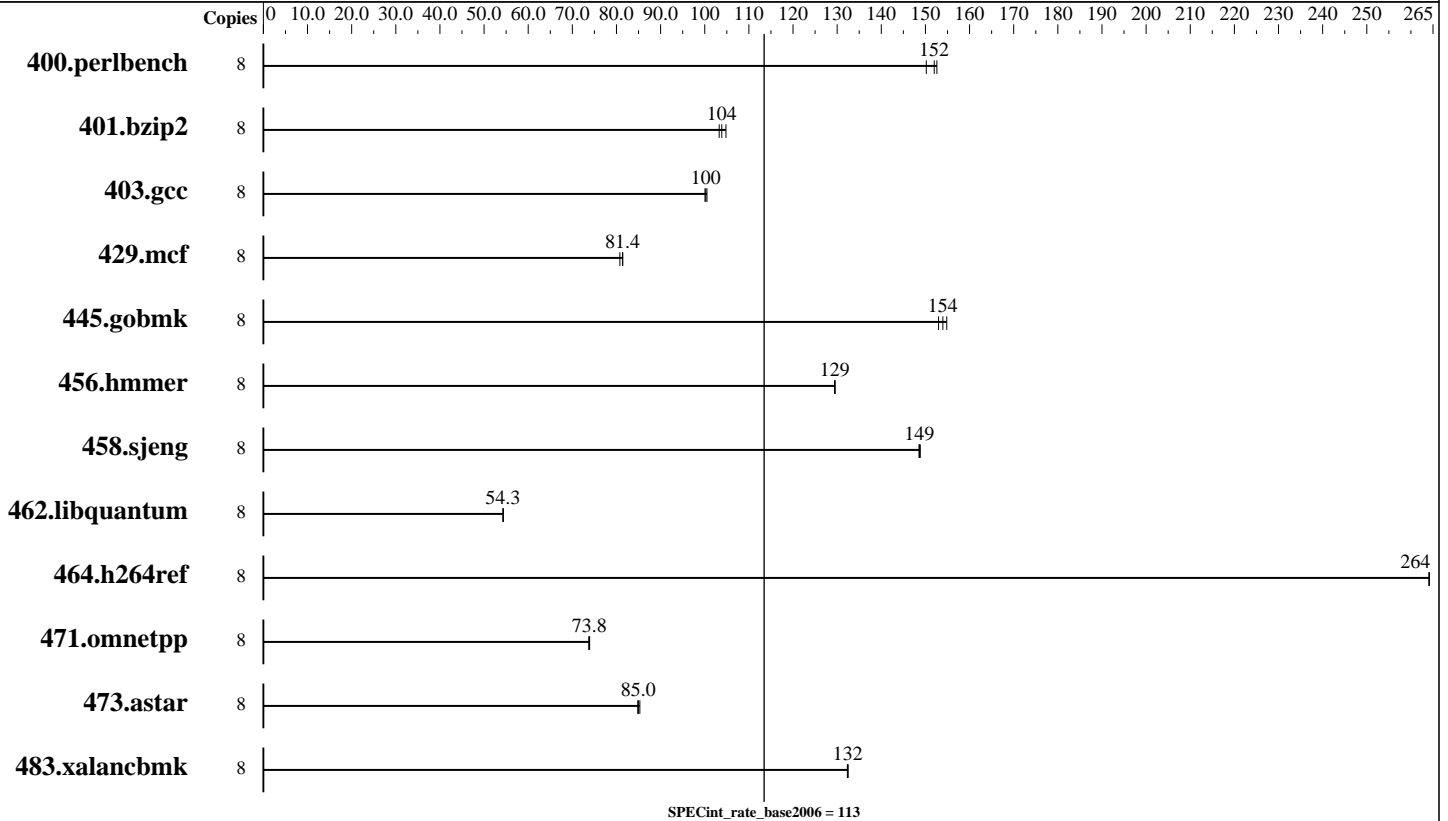

Hardware

CPU Name: Intel Xeon X5460
 CPU Characteristics: 1333MHz system bus
 CPU MHz: 3158
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores
 L3 Cache: None
 Other Cache: None
 Memory: 16 GB (8 x 2 GB DDR2-5300F ECC)
 Disk Subsystem: 1 x 36 GB SAS, 15000 RPM
 Other Hardware: None

Software

Operating System: SLES10 (x86_64), 2.6.16.21-0.8-smp
 Compiler: Intel C++ Compiler 10.1 for Linux
 Build 20070913 Package ID: 1_cc_p_10.1.008
 Auto Parallel: No
 File System: ReiserFS
 System State: Multi-user, run level 3
 Base Pointers: 32-bit
 Peak Pointers: Not Applicable
 Other Software: MicroQuill SmartHeap 8.1
 Binutils 2.17.50.0.15



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = Not Run

IBM System x3550 (Intel Xeon X5460)

SPECint_rate_base2006 = 113

CPU2006 license: 11

Test date: Nov-2007

Test sponsor: IBM Corporation

Hardware Availability: Jan-2008

Tested by: IBM Corporation

Software Availability: Nov-2007

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	520	150	512	153	<u>514</u>	<u>152</u>							
401.bzip2	8	737	105	748	103	<u>743</u>	<u>104</u>							
403.gcc	8	642	100	644	100	641	100							
429.mcf	8	896	81.4	903	80.8	896	81.4							
445.gobmk	8	542	155	545	154	549	153							
456.hammer	8	576	130	577	129	577	129							
458.sjeng	8	652	149	650	149	651	149							
462.libquantum	8	3052	54.3	3051	54.3	3052	54.3							
464.h264ref	8	670	264	670	264	670	264							
471.omnetpp	8	677	73.8	678	73.7	676	73.9							
473.astar	8	661	85.0	662	84.8	658	85.3							
483.xalancbmk	8	417	132	417	132	417	132							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

All benchmarks compiled in 32-bit mode except 401.bzip2 and 456.hammer, for peak, are compiled in 64-bit mode
Hardware Sector Prefetch Disabled and Adjacent Sector Prefetch Disabled
OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to physical,0
KMP_STACKSIZE set to 64M
Powersaved dameon was disabled in OS
taskset utility used to bind CPU(s) to processes

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = Not Run

IBM System x3550 (Intel Xeon X5460)

SPECint_rate_base2006 = 113

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Nov-2007

Hardware Availability: Jan-2008

Software Availability: Nov-2007

Base Optimization Flags

C benchmarks:

```
-fast -inline-calloc -opt-malloc-options=3
```

C++ benchmarks:

```
-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs  
-L/spec/users/rahul/cpu2006.1.0/lib -lsmartheap
```

Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090714.31.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090714.31.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.

Report generated on Tue Jul 22 14:26:39 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 27 November 2007.