SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

FORMAT
FORMAT R1520ML

SPECint®2006 = 27.1

SPECint_base2006 = 24.0

CPU2006 license: 9015
Test sponsor: FORMAT
Tested by: FORMAT

Test date: Oct-2008
Hardware Availability: Aug-2008
Software Availability: Nov-2008

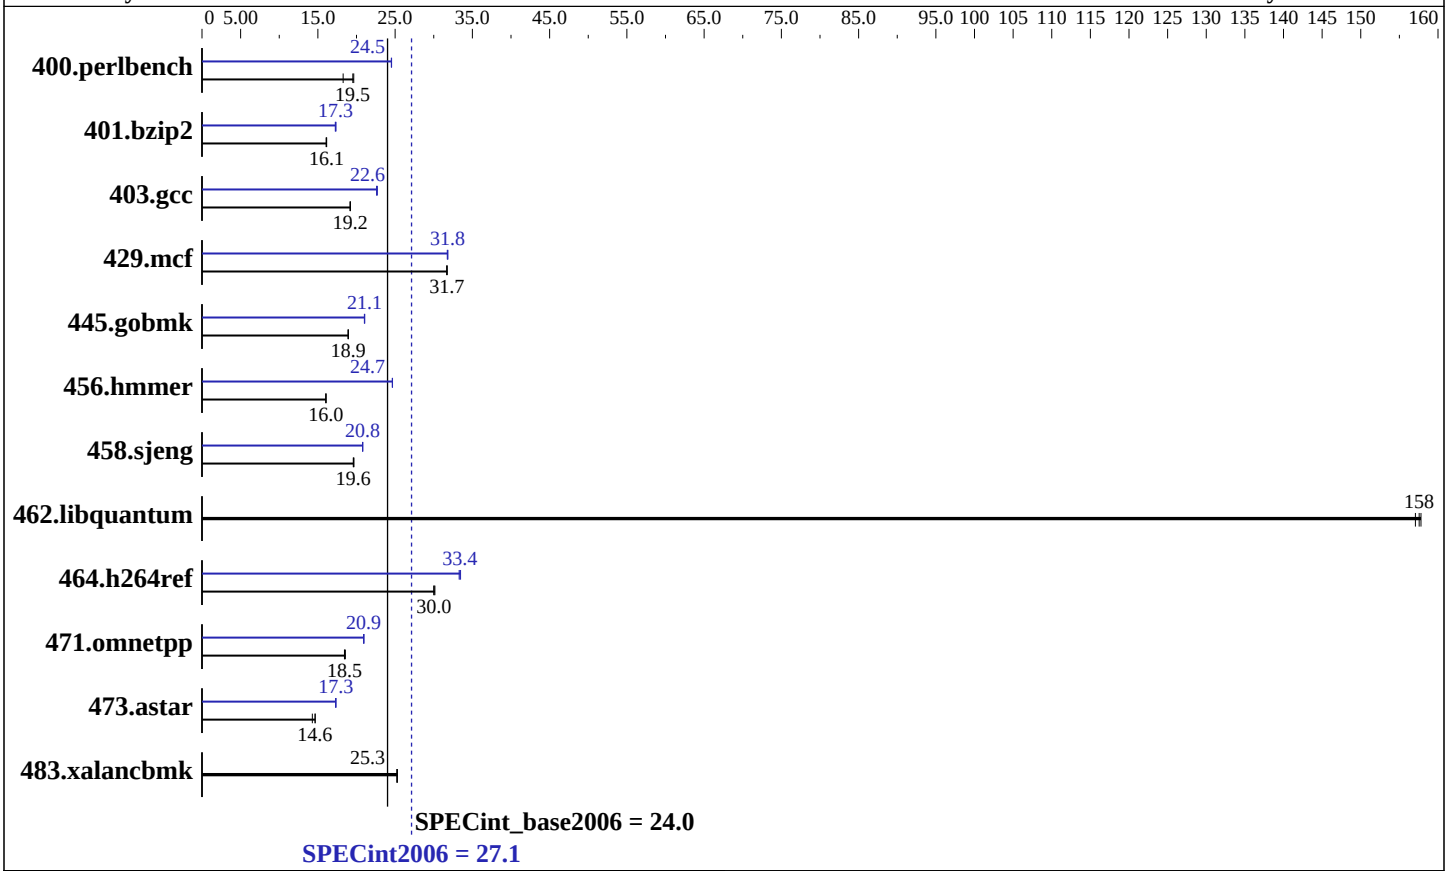

Hardware

CPU Name:	Intel Xeon X3360
CPU Characteristics:	1333 MHz system bus
CPU MHz:	2833
FPU:	Integrated
CPU(s) enabled:	4 cores, 1 chip, 4 cores/chip
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	12 MB I+D on chip per chip, 6 MB shared / 2 cores
L3 Cache:	None
Other Cache:	None
Memory:	8 GB (4 x GB ECC DDR2 SDRAM)
Disk Subsystem:	160 GB SATA, 5400 RPM
Other Hardware:	None

Software

Operating System:	Scientific Linux 5.2 2.6.18-92.1.13.el5
Compiler:	Intel C++ Compiler 11.0 for Linux Build 20080730 Package ID: l_cproc_b_11.0.042
Auto Parallel:	Yes
File System:	ext3
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V8.1 Binutils 2.18.50.0.7.20080502

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

FORMAT
FORMAT R1520ML

SPECint2006 = 27.1

SPECint_base2006 = 24.0

CPU2006 license: 9015
Test sponsor: FORMAT
Tested by: FORMAT

Test date: Oct-2008
Hardware Availability: Aug-2008
Software Availability: Nov-2008

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	535	18.3	497	19.6	**500**	**19.5**	**398**	**24.5**	398	24.5	399	24.5
401.bzip2	601	16.1	598	16.1	**598**	**16.1**	559	17.3	**558**	**17.3**	556	17.3
403.gcc	**420**	**19.2**	420	19.2	419	19.2	356	22.6	355	22.7	**356**	**22.6**
429.mcf	287	31.7	288	31.7	**288**	**31.7**	287	31.8	287	31.7	**287**	**31.8**
445.gobmk	554	18.9	554	18.9	**554**	**18.9**	**498**	**21.1**	498	21.1	499	21.0
456.hmmer	582	16.0	**582**	**16.0**	581	16.1	**378**	**24.7**	379	24.6	378	24.7
458.sjeng	**617**	**19.6**	615	19.7	618	19.6	582	20.8	582	20.8	**582**	**20.8**
462.libquantum	132	157	**132**	**158**	131	158	132	157	**132**	**158**	131	158
464.h264ref	**736**	**30.0**	734	30.1	738	30.0	661	33.5	**663**	**33.4**	665	33.3
471.omnetpp	339	18.4	**338**	**18.5**	337	18.6	299	20.9	**298**	**20.9**	298	21.0
473.astar	491	14.3	**480**	**14.6**	479	14.7	**405**	**17.3**	406	17.3	405	17.3
483.xalancbmk	273	25.3	273	25.2	**273**	**25.3**	273	25.3	273	25.2	**273**	**25.3**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

```
All benchmarks compiled in 32-bit mode except 401.bzip2 and 456.hmmer,
for peak, are compiled in 64-bit mode
OMP_NUM_THREADS set to number of processors
KMP_AFFINITY set to "physical,0"
```

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
```
-xSSE4.1 -ipo -O3 -no-prec-div -static -parallel
-par-runtime-control -opt-prefetch
```

C++ benchmarks:
```
-xSSE4.1 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/spec/cpu2006.1.1/lib -lsmartheap
```

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
```
icc
```

401.bzip2:
```
/opt/intel/Compiler/11.0/042/bin/intel64/icc
-L/opt/intel/Compiler/11.0/042/ipp/em64t/lib
-I/opt/intel/Compiler/11.0/042/ipp/em64t/include
```

456.hmmer:
```
/opt/intel/Compiler/11.0/042/bin/intel64/icc
-L/opt/intel/Compiler/11.0/042/ipp/em64t/lib
-I/opt/intel/Compiler/11.0/042/ipp/em64t/include
```

C++ benchmarks:
```
icpc
```

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
401.bzip2: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

Continued on next page

Peak Optimization Flags (Continued)

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -ansi-alias -opt-prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -auto-ilp32 -opt-prefetch
-ansi-alias

403.gcc: -xSSE4.1 -ipo -O3 -no-prec-div -static -inline-calloc
-opt-malloc-options=3

429.mcf: -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -O2 -ipo
-no-prec-div -ansi-alias

456.hmmer: -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2
-ansi-alias -auto-ilp32

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll4

462.libquantum: basepeak = yes

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -ansi-alias -opt-ra-region-strategy=block
-Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -ansi-alias -opt-ra-region-strategy=routine
-Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090713.01.html
http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090713.00.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090713.01.xml
http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090713.00.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Tue Jul 22 20:43:49 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 29 October 2008.