SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL385 G5p
(2.7 GHz AMD Opteron 2384)

SPECfp®2006 = 21.6

SPECfp_base2006 = 19.4

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Nov-2008
Hardware Availability: Nov-2008
Software Availability: Jun-2008

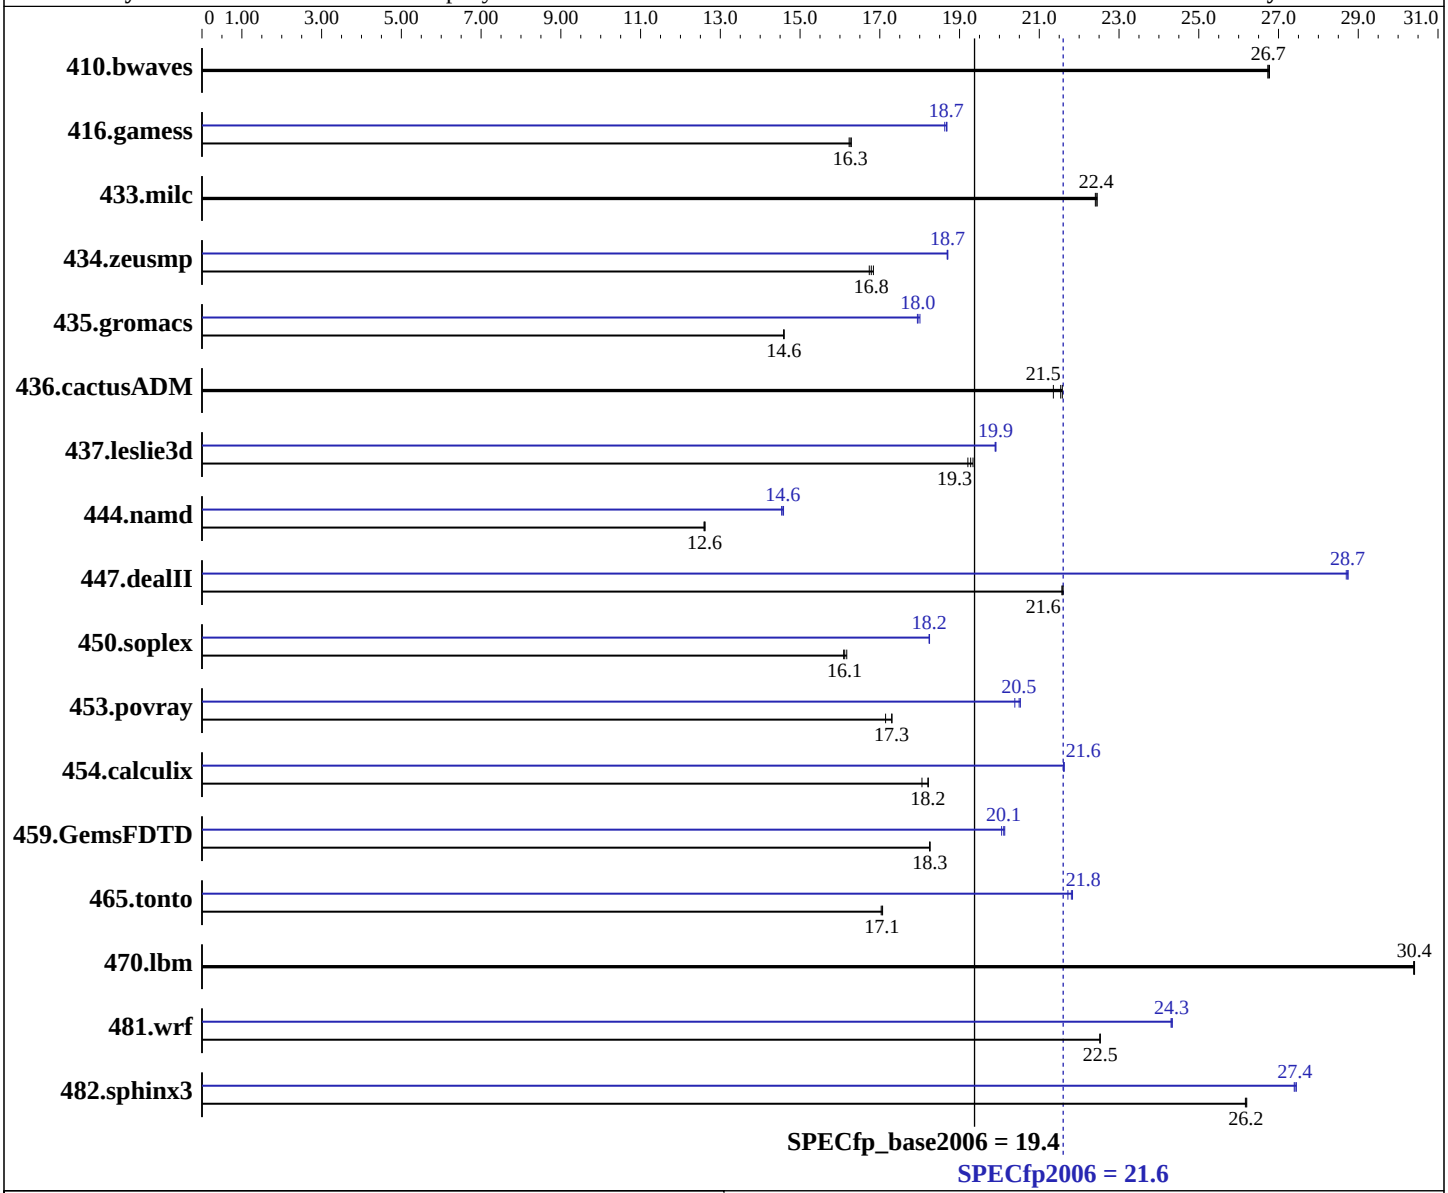

Hardware

CPU Name:	AMD Opteron 2384
CPU Characteristics:	
CPU MHz:	2700
FPU:	Integrated
CPU(s) enabled:	4 cores, 1 chip, 4 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	512 KB I+D on chip per core

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
Compiler:	PGI Server Complete Version 7.2 PathScale Compiler Suite Version 3.2
Auto Parallel:	No
File System:	ext3
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	32/64-bit

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL385 G5p
(2.7 GHz AMD Opteron 2384)

SPECfp2006 = 21.6

SPECfp_base2006 = 19.4

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Nov-2008
Hardware Availability: Nov-2008
Software Availability: Jun-2008

L3 Cache: 6 MB I+D on chip per chip
Other Cache: None
Memory: 16 GB (4x4 GB, PC2-6400P CL5)
Disk Subsystem: 1x72 GB 15 K SAS
Other Hardware: None

Other Software: binutils 2.17.50
32-bit and 64-bit libhugetlbfs libraries

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	508	26.8	**508**	**26.7**	508	26.7	508	26.8	**508**	**26.7**	508	26.7
416.gamess	1202	16.3	**1204**	**16.3**	1206	16.2	1051	18.6	1048	18.7	**1049**	**18.7**
433.milc	**409**	**22.4**	409	22.5	410	22.4	**409**	**22.4**	409	22.5	410	22.4
434.zeusmp	**542**	**16.8**	544	16.7	540	16.8	**487**	**18.7**	486	18.7	487	18.7
435.gromacs	489	14.6	489	14.6	**489**	**14.6**	**398**	**18.0**	397	18.0	398	17.9
436.cactusADM	**555**	**21.5**	560	21.4	554	21.6	**555**	**21.5**	560	21.4	554	21.6
437.leslie3d	489	19.2	**488**	**19.3**	486	19.3	**472**	**19.9**	472	19.9	473	19.9
444.namd	636	12.6	637	12.6	**636**	**12.6**	550	14.6	552	14.5	**551**	**14.6**
447.dealII	**530**	**21.6**	530	21.6	530	21.6	398	28.7	**398**	**28.7**	399	28.7
450.soplex	**517**	**16.1**	518	16.1	516	16.2	457	18.2	**457**	**18.2**	457	18.2
453.povray	310	17.1	307	17.3	**308**	**17.3**	**260**	**20.5**	261	20.4	259	20.5
454.calculix	457	18.1	453	18.2	**453**	**18.2**	381	21.6	**382**	**21.6**	382	21.6
459.GemsFDTD	**581**	**18.3**	581	18.3	581	18.3	527	20.1	**528**	**20.1**	529	20.1
465.tonto	576	17.1	**577**	**17.1**	578	17.0	453	21.7	451	21.8	**451**	**21.8**
470.lbm	452	30.4	**452**	**30.4**	452	30.4	452	30.4	**452**	**30.4**	452	30.4
481.wrf	496	22.5	496	22.5	**496**	**22.5**	**459**	**24.3**	459	24.3	460	24.3
482.sphinx3	745	26.2	744	26.2	**744**	**26.2**	**711**	**27.4**	710	27.4	711	27.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
 numactl was used to bind copies to the cores
```

Operating System Notes

```
Environment stack size set to 'unlimited'
Max locked memory set to 2097152
The libhugetlbfs libraries were installed using the
installation rpms that came with the distribution.
PGI_HUGE_PAGES set to 896.
Total number of huge pages available is 3584.
NCPUS set to number of cores
```

Platform Notes

```
BIOS configuration:
  Power Regulator set to Static High Performance Mode
```

General Notes

```
Environment variables set by runspec before the start of the run:
HUGETLB_MORECORE = "yes"
```

Base Compiler Invocation

C benchmarks:
pgcc

C++ benchmarks:
pgcpp

Fortran benchmarks:
pgf95

Benchmarks using both Fortran and C:
pgcc pgf95

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -Mnomain
436.cactusADM: -DSPEC_CPU_LP64 -Mnomain
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -Mnomain
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
```
-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi
```

C++ benchmarks:
```
-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed
--zc_eh -Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi
```

Fortran benchmarks:
```
-Mvect=cachesize:6291456 -fastsse -Mfprelaxed -Msmartalloc=huge
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi
```

Benchmarks using both Fortran and C:
```
-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi
```

Base Other Flags

C benchmarks:
```
-Mipa=jobs:4
```

C++ benchmarks:
```
-Mipa=jobs:4
```

Fortran benchmarks:
```
-Mipa=jobs:4
```

Benchmarks using both Fortran and C:
```
-Mipa=jobs:4
```

Peak Compiler Invocation

C benchmarks:
```
pgcc
```

C++ benchmarks (except as noted below):
```
pathCC
```

444.namd: `pgcpp`

Fortran benchmarks (except as noted below):
```
pathf95
```

410.bwaves: `pgf95`

Continued on next page

Peak Compiler Invocation (Continued)

434.zeusmp: pgf95

437.leslie3d: pgf95

Benchmarks using both Fortran and C (except as noted below):
pgcc pgf95

435.gromacs: pathcc pathf95

481.wrf: pathcc pathf95

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -Mnomain
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -Mnomain
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2)
-Mipa=fast(pass 2) -Mipa=inline(pass 2)
-Mvect=cachesize:6291456 -fastsse -Mfprelaxed -Msmartalloc
-tp barcelona-64 -Bstatic_pgi

C++ benchmarks:

444.namd: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)
-Mipa=inline(pass 2) -Mvect=cachesize:6291456 -fastsse
-Munroll=n:4 -Munroll=m:8 -Msmartalloc=huge -Mnodepchk

Continued on next page

Peak Optimization Flags (Continued)

444.namd (continued):
-Mfprelaxed --zc_eh -tp barcelona-64 -Bstatic_pgi

447.dealII: -march=barcelona -Ofast -static -INLINE:aggressive=on
-fno-exceptions -m32

450.soplex: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -L/usr/lib -lhugetlbfs(pass 2) -O3
-INLINE:aggressive=on -OPT:IEEE_arith=3
-OPT:IEEE_NaN_Inf=off -OPT:fold_unsigned_relops=on
-OPT:malloc_alg=1 -CG:load_exe=0 -fno-exceptions -m32

453.povray: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -INLINE:aggressive=on

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2)
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT(pass 2)
-L/usr/lib64 -lhugetlbfs(pass 2) -O2 -OPT:Ofast -OPT:ro=3
-OPT:unroll_size=256

434.zeusmp: -Mvect=cachesize:6291456 -fastsse -Mfprelaxed
-Mprefetch=distance:8 -Mprefetch=t0 -Msmartalloc=huge
-Msmartalloc=hugebss -Mipa=fast -Mipa=inline
-tp barcelona-64 -Bstatic_pgi

437.leslie3d: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2)
-Mipa=fast(pass 2) -Mipa=inline(pass 2)
-Mvect=cachesize:6291456 -fastsse -Mvect=fuse
-Msmartalloc=huge -Mprefetch=distance:8 -Mprefetch=t0
-Mfprelaxed -tp barcelona-64 -Bstatic_pgi

459.GemsFDTD: -march=barcelona -Ofast -LNO:fission=2 -LNO:simd=2
-LNO:prefetch_ahead=1 -CG:load_exe=0 -CG:prefer_lru_reg=off
-OPT:malloc_alg=1
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT
-L/usr/lib64 -lhugetlbfs

465.tonto: -march=barcelona -Ofast -OPT:alias=no_f90_pointer_alias
-LNO:blocking=off -CG:load_exe=1 -IPA:plimit=525
-OPT:malloc_alg=1
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT
-L/usr/lib64 -lhugetlbfs

Benchmarks using both Fortran and C:

Continued on next page

Peak Optimization Flags (Continued)

435.gromacs: `-march=barcelona -Ofast -OPT:rsqrt=2 -OPT:malloc_alg=1 -Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT -L/usr/lib64 -lhugetlbfs`

436.cactusADM: `basepeak = yes`

454.calculix: `-Mpfi=indirect`(pass 1) `-Mpfo=indirect`(pass 2) `-Mipa=fast`(pass 2) `-Mipa=inline`(pass 2) `-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mprefetch=t0 -Mpre -Mfprelaxed -tp barcelona-64 -Bstatic_pgi`

481.wrf: `-march=barcelona -Ofast -LNO:blocking=off -LNO:prefetch_ahead=10 -LANG:copyinout=off -IPA:callee_limit=5000 -GRA:prioritize_by_density=on -OPT:malloc_alg=1 -m3dnow -Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT -L/usr/lib64 -lhugetlbfs`

Peak Other Flags

C benchmarks:
`-Mipa=jobs:4`(pass 2)

C++ benchmarks:

444.namd: `-Mipa=jobs:4`(pass 2)

Fortran benchmarks (except as noted below):
`-Mipa=jobs:4`(pass 2)

416.gamess: `No flags used`

459.GemsFDTD: `No flags used`

465.tonto: `No flags used`

Benchmarks using both Fortran and C (except as noted below):
`-Mipa=jobs:4`(pass 2)

435.gromacs: `No flags used`

481.wrf: `No flags used`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.20090710.html`
`http://www.spec.org/cpu2006/flags/CPU2006_flags.20090710.html`
`http://www.spec.org/cpu2006/flags/pgi72_linux_flags.html`

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.20090710.xml
http://www.spec.org/cpu2006/flags/CPU2006_flags.20090710.xml
http://www.spec.org/cpu2006/flags/pgi72_linux_flags.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Tue Jul 22 22:01:44 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 26 November 2008.