SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R905 (AMD Opteron 8387, 2.80 GHz)

SPECfp®2006 = 23.4

SPECfp_base2006 = 19.0

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Mar-2009
Hardware Availability: May-2009
Software Availability: Oct-2008

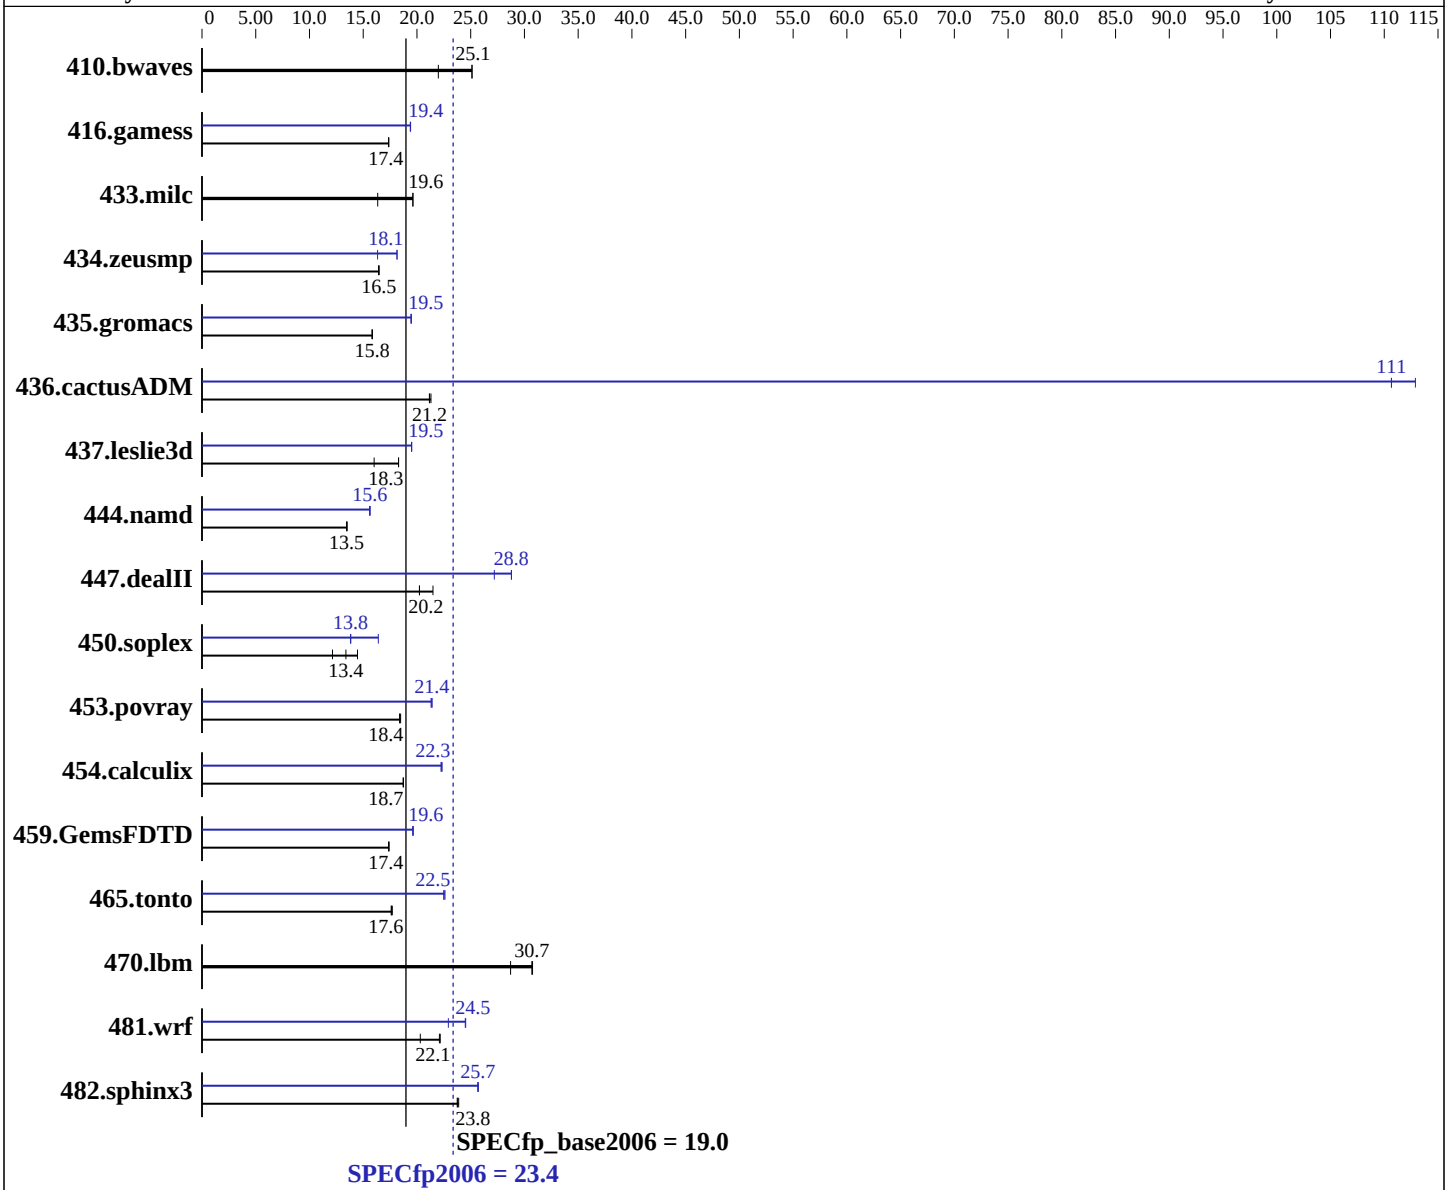

Hardware

CPU Name:	AMD Opteron 8387
CPU Characteristics:	
CPU MHz:	2800
FPU:	Integrated
CPU(s) enabled:	16 cores, 4 chips, 4 cores/chip
CPU(s) orderable:	4 chips
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	512 KB I+D on chip per core

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 10 (x86_64) SP2, Kernel 2.6.16.60-0.21-smp
Compiler:	PGI Server Complete Version 7.2 PathScale Compiler Suite Version 3.2
Auto Parallel:	Yes
File System:	ReiserFS
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	32/64-bit

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R905 (AMD Opteron 8387, 2.80 GHz)

SPECfp2006 = 23.4

SPECfp_base2006 = 19.0

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Mar-2009
Hardware Availability: May-2009
Software Availability: Oct-2008

L3 Cache: 6 MB I+D on chip per chip
Other Cache: None
Memory: 64 GB (16 x 4 GB DDR2-800)
Disk Subsystem: 1 x 73 GB 10000 RPM SAS
Other Hardware: None

Other Software: binutils 2.18
32-bit and 64-bit libhugetlbfs libraries

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	618	22.0	**541**	**25.1**	541	25.1	618	22.0	**541**	**25.1**	541	25.1
416.gamess	**1128**	**17.4**	1126	17.4	1128	17.4	1009	19.4	**1009**	**19.4**	1010	19.4
433.milc	562	16.3	468	19.6	**468**	**19.6**	562	16.3	468	19.6	**468**	**19.6**
434.zeusmp	**553**	**16.5**	554	16.4	552	16.5	**502**	**18.1**	557	16.3	501	18.1
435.gromacs	451	15.8	451	15.8	**451**	**15.8**	367	19.5	367	19.5	**367**	**19.5**
436.cactusADM	561	21.3	**564**	**21.2**	565	21.2	**108**	**111**	106	113	108	111
437.leslie3d	**514**	**18.3**	514	18.3	587	16.0	482	19.5	482	19.5	**482**	**19.5**
444.namd	**595**	**13.5**	596	13.5	594	13.5	513	15.6	514	15.6	**513**	**15.6**
447.dealII	566	20.2	532	21.5	**565**	**20.2**	421	27.2	397	28.8	**397**	**28.8**
450.soplex	**623**	**13.4**	687	12.1	576	14.5	**602**	**13.8**	604	13.8	508	16.4
453.povray	289	18.4	288	18.5	**289**	**18.4**	249	21.4	250	21.3	**249**	**21.4**
454.calculix	**440**	**18.7**	440	18.7	441	18.7	369	22.3	**370**	**22.3**	371	22.2
459.GemsFDTD	610	17.4	**610**	**17.4**	611	17.4	540	19.6	541	19.6	**540**	**19.6**
465.tonto	559	17.6	556	17.7	**558**	**17.6**	437	22.5	435	22.6	**437**	**22.5**
470.lbm	447	30.8	479	28.7	**448**	**30.7**	447	30.8	479	28.7	**448**	**30.7**
481.wrf	504	22.2	**506**	**22.1**	550	20.3	**456**	**24.5**	455	24.5	487	22.9
482.sphinx3	816	23.9	821	23.7	**819**	**23.8**	759	25.7	758	25.7	**759**	**25.7**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
 'numactl' was used to bind copies to the cores
```

Operating System Notes

```
The libhugetlbfs libraries were installed using the
installation RPMs that came with the distribution.

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152'  was used to set environment locked pages in memory limit

Set vm/nr_hugepages=14336 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages
```

General Notes

```
Environment variables set by runspec before the start of the run:
HUGETLB_MORECORE = "yes"
LD_LIBRARY_PATH = "/root/cpu2006-1.1/amd909gh-libs/64:/root/cpu2006-1.1/amd909gh-libs/32"
NCPUS = "8"
```

Base Compiler Invocation

C benchmarks:
pgcc

C++ benchmarks:
pgcpp

Fortran benchmarks:
pgf95

Benchmarks using both Fortran and C:
pgcc pgf95

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -Mnomain
436.cactusADM: -DSPEC_CPU_LP64 -Mnomain
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -Mnomain
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi

Continued on next page

Base Optimization Flags (Continued)

C++ benchmarks:
```
-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed
--zc_eh -Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi
```

Fortran benchmarks:
```
-Mvect=cachesize:6291456 -fastsse -Mfprelaxed -Msmartalloc=huge
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi
```

Benchmarks using both Fortran and C:
```
-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi
```

Base Other Flags

C benchmarks:
```
-Mipa=jobs:4
```

C++ benchmarks:
```
-Mipa=jobs:4
```

Fortran benchmarks:
```
-Mipa=jobs:4
```

Benchmarks using both Fortran and C:
```
-Mipa=jobs:4
```

Peak Compiler Invocation

C benchmarks:
```
pgcc
```

C++ benchmarks (except as noted below):
```
pathCC
```

444.namd: `pgcpp`

Fortran benchmarks (except as noted below):
```
pgf95
```

416.gamess: `pathf95`

459.GemsFDTD: `pathf95`

465.tonto: `pathf95`

Continued on next page

Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C (except as noted below):
pathcc pathf95

436.cactusADM: pgcc pgf95

454.calculix: pgcc pgf95

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -Mnomain
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -Mnomain
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2)
-Mipa=fast(pass 2) -Mipa=inline(pass 2)
-Mvect=cachesize:6291456 -fastsse -Mfprelaxed -Msmartalloc
-tp barcelona-64 -Bstatic_pgi

C++ benchmarks:

444.namd: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)
-Mipa=inline(pass 2) -Mvect=cachesize:6291456 -fastsse
-Munroll=n:4 -Munroll=m:8 -Msmartalloc=huge -Mnodepchk
-Mfprelaxed --zc_eh -tp barcelona-64 -Bstatic_pgi

Continued on next page

Peak Optimization Flags (Continued)

447.dealII: -march=barcelona -Ofast -static -INLINE:aggressive=on
-fno-exceptions -m32

450.soplex: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -L/usr/lib -lhugetlbfs(pass 2) -O3
-INLINE:aggressive=on -OPT:IEEE_arith=3
-OPT:IEEE_NaN_Inf=off -OPT:fold_unsigned_relops=on
-OPT:malloc_alg=1 -CG:load_exe=0 -fno-exceptions -m32

453.povray: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -INLINE:aggressive=on

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2)
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT(pass 2)
-L/usr/lib64 -lhugetlbfs(pass 2) -O2 -OPT:Ofast -OPT:ro=3
-OPT:unroll_size=256

434.zeusmp: -Mvect=cachesize:6291456 -fastsse -Mfprelaxed
-Mprefetch=distance:8 -Mprefetch=t0 -Msmartalloc=huge
-Msmartalloc=hugebss -Mipa=fast -Mipa=inline
-tp barcelona-64 -Bstatic_pgi

437.leslie3d: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2)
-Mipa=fast(pass 2) -Mipa=inline(pass 2)
-Mvect=cachesize:6291456 -fastsse -Mvect=fuse
-Msmartalloc=huge -Mprefetch=distance:8 -Mprefetch=t0
-Mfprelaxed -tp barcelona-64 -Bstatic_pgi

459.GemsFDTD: -march=barcelona -Ofast -LNO:fission=2 -LNO:simd=2
-LNO:prefetch_ahead=1 -CG:load_exe=0 -CG:prefer_lru_reg=off
-OPT:malloc_alg=1
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT
-L/usr/lib64 -lhugetlbfs

465.tonto: -march=barcelona -Ofast -OPT:alias=no_f90_pointer_alias
-LNO:blocking=off -CG:load_exe=1 -IPA:plimit=525
-OPT:malloc_alg=1
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT
-L/usr/lib64 -lhugetlbfs

Benchmarks using both Fortran and C:

435.gromacs: -march=barcelona -Ofast -OPT:rsqrt=2 -OPT:malloc_alg=1
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT
-L/usr/lib64 -lhugetlbfs

Continued on next page

Peak Optimization Flags (Continued)

436.cactusADM: `-Mvect=cachesize:6291456 -fastsse -Mconcur -Msmartalloc=huge -Mfprelaxed -Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi`

454.calculix: `-Mpfi=indirect`(pass 1) `-Mpfo=indirect`(pass 2) `-Mipa=fast`(pass 2) `-Mipa=inline`(pass 2) `-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mprefetch=t0 -Mpre -Mfprelaxed -tp barcelona-64 -Bstatic_pgi`

481.wrf: `-march=barcelona -Ofast -LNO:blocking=off -LNO:prefetch_ahead=10 -LANG:copyinout=off -IPA:callee_limit=5000 -GRA:prioritize_by_density=on -OPT:malloc_alg=1 -m3dnow -Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT -L/usr/lib64 -lhugetlbfs`

Peak Other Flags

C benchmarks:
`-Mipa=jobs:4`(pass 2)

C++ benchmarks:

444.namd: `-Mipa=jobs:4`(pass 2)

Fortran benchmarks (except as noted below):
`-Mipa=jobs:4`(pass 2)

416.gamess: `No flags used`

459.GemsFDTD: `No flags used`

465.tonto: `No flags used`

Benchmarks using both Fortran and C (except as noted below):
`-Mipa=jobs:4`(pass 2)

435.gromacs: `No flags used`

481.wrf: `No flags used`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/pgi72_linux_flags.20090710.html`
`http://www.spec.org/cpu2006/flags/pathscale32-flags.html`
`http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.html`

You can also download the XML flags sources by saving the following links:

```
http://www.spec.org/cpu2006/flags/pgi72_linux_flags.20090710.xml
http://www.spec.org/cpu2006/flags/pathscale32-flags.xml
http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.xml
```


SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 00:03:11 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 18 May 2009.