SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M905 (AMD Opteron 8393 SE, 3.10 GHz)

SPECfp®2006 = 24.5

SPECfp_base2006 = 19.9

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Apr-2009
Hardware Availability: May-2009
Software Availability: Oct-2008

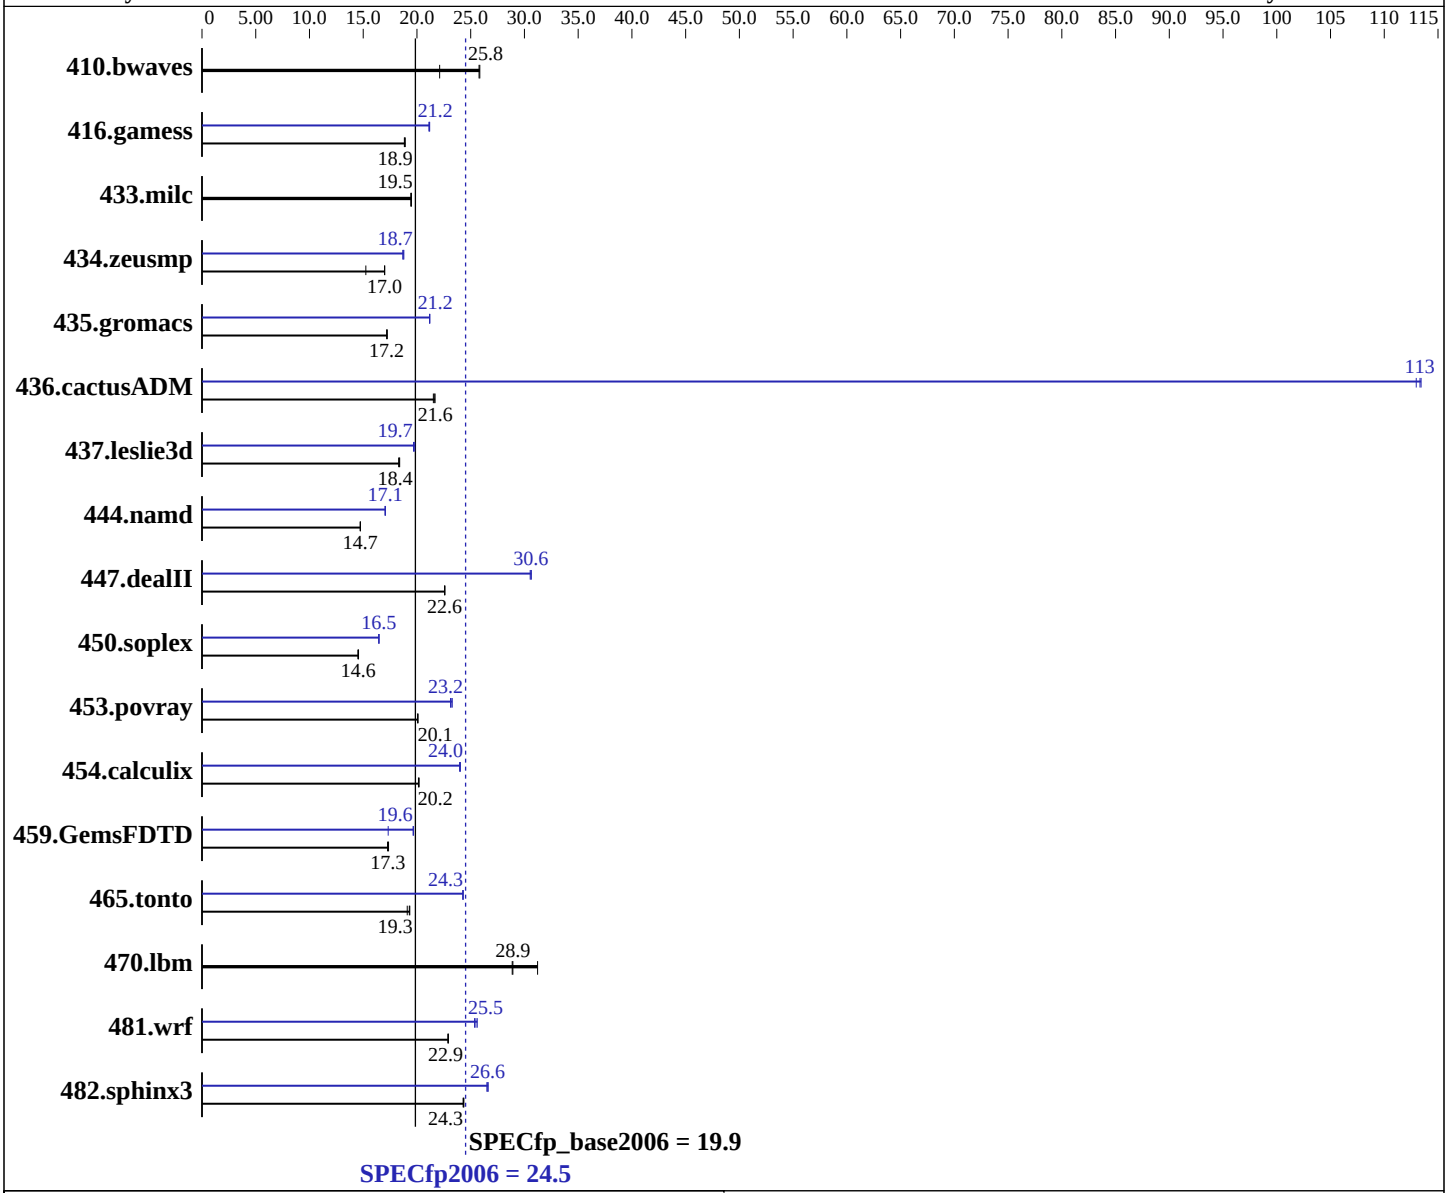

Hardware

CPU Name:	AMD Opteron 8393 SE
CPU Characteristics:	
CPU MHz:	3100
FPU:	Integrated
CPU(s) enabled:	16 cores, 4 chips, 4 cores/chip
CPU(s) orderable:	4 chips
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	512 KB I+D on chip per core

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server release 5.3, Kernel 2.6.18-128.el5
Compiler:	PGI Server Complete Version 7.2 PathScale Compiler Suite Version 3.2
Auto Parallel:	Yes
File System:	ext3
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	32/64-bit

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M905 (AMD Opteron 8393 SE, 3.10 GHz)

SPECfp2006 = 24.5

SPECfp_base2006 = 19.9

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Apr-2009
Hardware Availability: May-2009
Software Availability: Oct-2008

L3 Cache: 6 MB I+D on chip per chip
Other Cache: None
Memory: 64 GB (16 x 4 GB DDR2-800)
Disk Subsystem: 1 x 73 GB 15000 RPM SAS
Other Hardware: None

Other Software: binutils 2.18
32-bit and 64-bit libhugetlbfs libraries

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	**527**	**25.8**	615	22.1	526	25.8	**527**	**25.8**	615	22.1	526	25.8
416.gamess	1040	18.8	**1038**	**18.9**	1036	18.9	924	21.2	927	21.1	**926**	**21.2**
433.milc	471	19.5	472	19.4	**472**	**19.5**	471	19.5	472	19.4	**472**	**19.5**
434.zeusmp	**536**	**17.0**	597	15.2	535	17.0	485	18.8	**486**	**18.7**	487	18.7
435.gromacs	**415**	**17.2**	415	17.2	414	17.2	**337**	**21.2**	337	21.2	337	21.2
436.cactusADM	555	21.5	551	21.7	**553**	**21.6**	106	113	**105**	**113**	105	113
437.leslie3d	511	18.4	**512**	**18.4**	514	18.3	475	19.8	**477**	**19.7**	478	19.7
444.namd	**544**	**14.7**	544	14.7	545	14.7	471	17.0	**470**	**17.1**	470	17.1
447.dealII	506	22.6	507	22.6	**507**	**22.6**	**374**	**30.6**	375	30.5	373	30.6
450.soplex	575	14.5	**573**	**14.6**	573	14.6	506	16.5	507	16.5	**507**	**16.5**
453.povray	265	20.1	**265**	**20.1**	265	20.1	228	23.3	230	23.1	**230**	**23.2**
454.calculix	**409**	**20.2**	410	20.1	409	20.2	**343**	**24.0**	344	24.0	343	24.0
459.GemsFDTD	**613**	**17.3**	611	17.4	615	17.3	612	17.3	539	19.7	**540**	**19.6**
465.tonto	**510**	**19.3**	509	19.3	515	19.1	405	24.3	405	24.3	**405**	**24.3**
470.lbm	476	28.9	**475**	**28.9**	440	31.2	476	28.9	**475**	**28.9**	440	31.2
481.wrf	487	22.9	**488**	**22.9**	488	22.9	436	25.6	441	25.4	**438**	**25.5**
482.sphinx3	**801**	**24.3**	802	24.3	800	24.4	732	26.6	**733**	**26.6**	735	26.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores
```

Operating System Notes

```
The libhugetlbfs libraries were installed using the
installation RPMs that came with the distribution.

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152'  was used to set environment locked pages in memory limit

Set vm/nr_hugepages=14336 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages
```

General Notes

```
Environment variables set by runspec before the start of the run:
HUGETLB_MORECORE = "yes"
LD_LIBRARY_PATH = "/root/cpu2006-1.1/amd909gh-libs/64:/root/cpu2006-1.1/amd909gh-libs/32"
NCPUS = "8"
```

Base Compiler Invocation

C benchmarks:
pgcc

C++ benchmarks:
pgcpp

Fortran benchmarks:
pgf95

Benchmarks using both Fortran and C:
pgcc pgf95

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -Mnomain
436.cactusADM: -DSPEC_CPU_LP64 -Mnomain
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -Mnomain
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi

Continued on next page

Base Optimization Flags (Continued)

C++ benchmarks:
```
-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed
--zc_eh -Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi
```

Fortran benchmarks:
```
-Mvect=cachesize:6291456 -fastsse -Mfprelaxed -Msmartalloc=huge
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi
```

Benchmarks using both Fortran and C:
```
-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi
```

Base Other Flags

C benchmarks:
```
-Mipa=jobs:4
```

C++ benchmarks:
```
-Mipa=jobs:4
```

Fortran benchmarks:
```
-Mipa=jobs:4
```

Benchmarks using both Fortran and C:
```
-Mipa=jobs:4
```

Peak Compiler Invocation

C benchmarks:
```
pgcc
```

C++ benchmarks (except as noted below):
```
pathCC
```

444.namd: `pgcpp`

Fortran benchmarks (except as noted below):
```
pgf95
```

416.gamess: `pathf95`

459.GemsFDTD: `pathf95`

465.tonto: `pathf95`

Continued on next page

Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C (except as noted below):
pathcc pathf95

436.cactusADM: pgcc pgf95

454.calculix: pgcc pgf95

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -Mnomain
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -Mnomain
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2)
-Mipa=fast(pass 2) -Mipa=inline(pass 2)
-Mvect=cachesize:6291456 -fastsse -Mfprelaxed -Msmartalloc
-tp barcelona-64 -Bstatic_pgi

C++ benchmarks:

444.namd: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)
-Mipa=inline(pass 2) -Mvect=cachesize:6291456 -fastsse
-Munroll=n:4 -Munroll=m:8 -Msmartalloc=huge -Mnodepchk
-Mfprelaxed --zc_eh -tp barcelona-64 -Bstatic_pgi

Continued on next page

Peak Optimization Flags (Continued)

447.dealII: `-march=barcelona -Ofast -static -INLINE:aggressive=on -fno-exceptions -m32`

450.soplex: `-march=barcelona -fb_create fbdata`(pass 1) `-fb_opt fbdata`(pass 2) `-L/usr/lib -lhugetlbfs`(pass 2) `-O3 -INLINE:aggressive=on -OPT:IEEE_arith=3 -OPT:IEEE_NaN_Inf=off -OPT:fold_unsigned_relops=on -OPT:malloc_alg=1 -CG:load_exe=0 -fno-exceptions -m32`

453.povray: `-march=barcelona -fb_create fbdata`(pass 1) `-fb_opt fbdata`(pass 2) `-Ofast -INLINE:aggressive=on`

Fortran benchmarks:

410.bwaves: `basepeak = yes`

416.gamess: `-march=barcelona -fb_create fbdata`(pass 1) `-fb_opt fbdata`(pass 2) `-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT`(pass 2) `-L/usr/lib64 -lhugetlbfs`(pass 2) `-O2 -OPT:Ofast -OPT:ro=3 -OPT:unroll_size=256`

434.zeusmp: `-Mvect=cachesize:6291456 -fastsse -Mfprelaxed -Mprefetch=distance:8 -Mprefetch=t0 -Msmartalloc=huge -Msmartalloc=hugebss -Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi`

437.leslie3d: `-Mpfi=indirect`(pass 1) `-Mpfo=indirect`(pass 2) `-Mipa=fast`(pass 2) `-Mipa=inline`(pass 2) `-Mvect=cachesize:6291456 -fastsse -Mvect=fuse -Msmartalloc=huge -Mprefetch=distance:8 -Mprefetch=t0 -Mfprelaxed -tp barcelona-64 -Bstatic_pgi`

459.GemsFDTD: `-march=barcelona -Ofast -LNO:fission=2 -LNO:simd=2 -LNO:prefetch_ahead=1 -CG:load_exe=0 -CG:prefer_lru_reg=off -OPT:malloc_alg=1 -Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT -L/usr/lib64 -lhugetlbfs`

465.tonto: `-march=barcelona -Ofast -OPT:alias=no_f90_pointer_alias -LNO:blocking=off -CG:load_exe=1 -IPA:plimit=525 -OPT:malloc_alg=1 -Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT -L/usr/lib64 -lhugetlbfs`

Benchmarks using both Fortran and C:

435.gromacs: `-march=barcelona -Ofast -OPT:rsqrt=2 -OPT:malloc_alg=1 -Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT -L/usr/lib64 -lhugetlbfs`

Continued on next page

Peak Optimization Flags (Continued)

436.cactusADM: `-Mvect=cachesize:6291456 -fastsse -Mconcur -Msmartalloc=huge -Mfprelaxed -Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi`

454.calculix: `-Mpfi=indirect`(pass 1) `-Mpfo=indirect`(pass 2) `-Mipa=fast`(pass 2) `-Mipa=inline`(pass 2) `-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mprefetch=t0 -Mpre -Mfprelaxed -tp barcelona-64 -Bstatic_pgi`

481.wrf: `-march=barcelona -Ofast -LNO:blocking=off -LNO:prefetch_ahead=10 -LANG:copyinout=off -IPA:callee_limit=5000 -GRA:prioritize_by_density=on -OPT:malloc_alg=1 -m3dnow -Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT -L/usr/lib64 -lhugetlbfs`

Peak Other Flags

C benchmarks:
`-Mipa=jobs:4`(pass 2)

C++ benchmarks:

444.namd: `-Mipa=jobs:4`(pass 2)

Fortran benchmarks (except as noted below):
`-Mipa=jobs:4`(pass 2)

416.gamess: `No flags used`

459.GemsFDTD: `No flags used`

465.tonto: `No flags used`

Benchmarks using both Fortran and C (except as noted below):
`-Mipa=jobs:4`(pass 2)

435.gromacs: `No flags used`

481.wrf: `No flags used`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/pgi72_linux_flags.20090710.html`
`http://www.spec.org/cpu2006/flags/pathscale32-flags.html`
`http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.html`

You can also download the XML flags sources by saving the following links:

```
http://www.spec.org/cpu2006/flags/pgi72_linux_flags.20090710.xml
http://www.spec.org/cpu2006/flags/pathscale32-flags.xml
http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.xml
```


SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 00:31:52 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 26 May 2009.