SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R805 (AMD Opteron 2393 SE, 3.10 GHz)

SPECfp®2006 = 25.3

SPECfp_base2006 = 20.3

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: May-2009
Hardware Availability: May-2009
Software Availability: Oct-2008

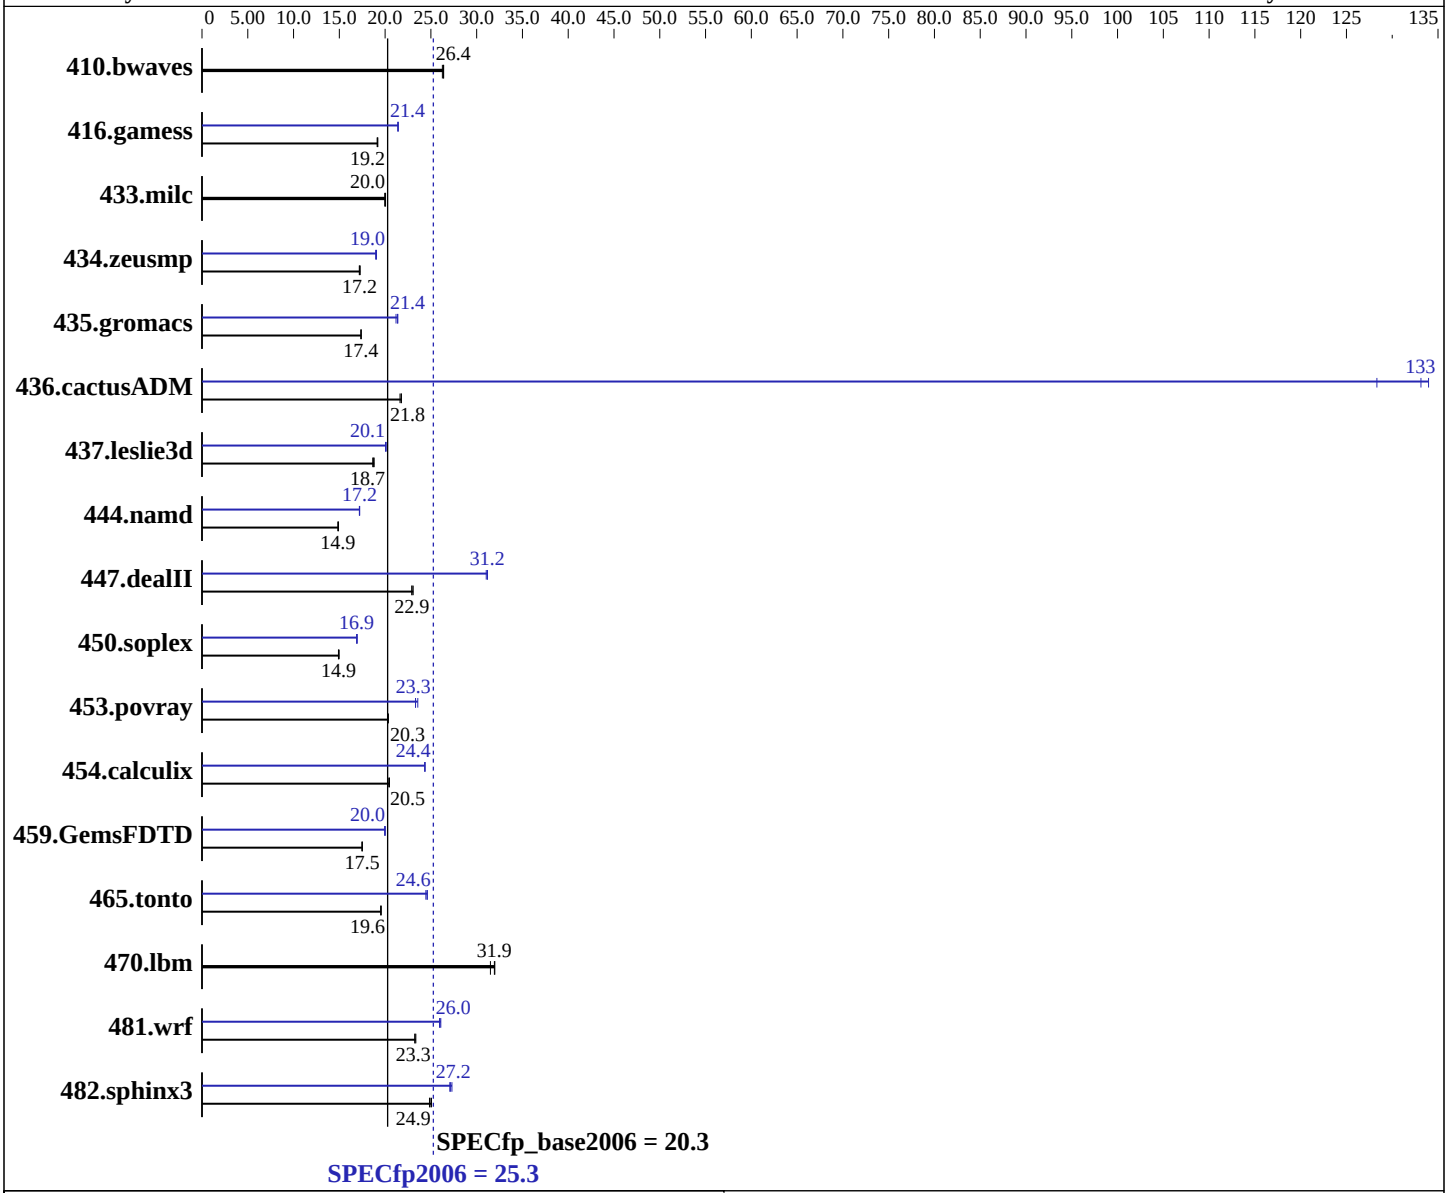

Hardware

CPU Name:	AMD Opteron 2393 SE
CPU Characteristics:	
CPU MHz:	3100
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	512 KB I+D on chip per core

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server release 5.3, Kernel 2.6.18-128.el5
Compiler:	PGI Server Complete Version 7.2 PathScale Compiler Suite Version 3.2
Auto Parallel:	Yes
File System:	ext3
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	32/64-bit

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R805 (AMD Opteron 2393 SE, 3.10 GHz)

SPECfp2006 = 25.3

SPECfp_base2006 = 20.3

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: May-2009
Hardware Availability: May-2009
Software Availability: Oct-2008

L3 Cache: 6 MB I+D on chip per chip
Other Cache: None
Memory: 32 GB (8 x 4 GB DDR2-800)
Disk Subsystem: 1 x 73 GB 15000 RPM SAS
Other Hardware: None

Other Software: binutils 2.18
32-bit and 64-bit libhugetlbfs libraries

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	515	26.4	**515**	**26.4**	518	26.3	515	26.4	**515**	**26.4**	518	26.3
416.gamess	1024	19.1	1020	19.2	**1020**	**19.2**	915	21.4	**915**	**21.4**	914	21.4
433.milc	458	20.0	460	20.0	**459**	**20.0**	458	20.0	460	20.0	**459**	**20.0**
434.zeusmp	530	17.2	**529**	**17.2**	527	17.3	**479**	**19.0**	477	19.1	479	19.0
435.gromacs	411	17.4	**411**	**17.4**	411	17.4	337	21.2	334	21.4	**334**	**21.4**
436.cactusADM	**549**	**21.8**	549	21.8	553	21.6	89.2	134	93.1	128	**89.8**	**133**
437.leslie3d	500	18.8	**502**	**18.7**	504	18.6	**469**	**20.1**	467	20.1	469	20.1
444.namd	**539**	**14.9**	538	14.9	540	14.8	**466**	**17.2**	466	17.2	467	17.2
447.dealII	**499**	**22.9**	496	23.1	499	22.9	**367**	**31.2**	367	31.2	368	31.0
450.soplex	557	15.0	**559**	**14.9**	560	14.9	494	16.9	492	17.0	**493**	**16.9**
453.povray	**262**	**20.3**	262	20.3	262	20.3	226	23.6	228	23.3	**228**	**23.3**
454.calculix	**403**	**20.5**	403	20.5	406	20.3	**339**	**24.4**	339	24.4	339	24.3
459.GemsFDTD	606	17.5	607	17.5	**606**	**17.5**	532	20.0	**531**	**20.0**	530	20.0
465.tonto	504	19.5	503	19.6	**503**	**19.6**	400	24.6	402	24.5	**400**	**24.6**
470.lbm	**430**	**31.9**	430	32.0	436	31.5	**430**	**31.9**	430	32.0	436	31.5
481.wrf	**480**	**23.3**	481	23.2	478	23.4	428	26.1	431	25.9	**430**	**26.0**
482.sphinx3	778	25.1	**782**	**24.9**	784	24.8	720	27.1	**718**	**27.2**	714	27.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores
```

Operating System Notes

```
The libhugetlbfs libraries were installed using the
installation RPMs that came with the distribution.

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152'  was used to set environment locked pages in memory limit

Set vm/nr_hugepages=7146 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages
```

General Notes

```
Environment variables set by runspec before the start of the run:
HUGETLB_MORECORE = "yes"
LD_LIBRARY_PATH = "/root/cpu2006-1.1/amd909gh-libs/64:/root/cpu2006-1.1/amd909gh-libs/32"
NCPUS = "8"
```

Base Compiler Invocation

C benchmarks:
pgcc

C++ benchmarks:
pgcpp

Fortran benchmarks:
pgf95

Benchmarks using both Fortran and C:
pgcc pgf95

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -Mnomain
436.cactusADM: -DSPEC_CPU_LP64 -Mnomain
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -Mnomain
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi

Continued on next page

Base Optimization Flags (Continued)

C++ benchmarks:
```
-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed
--zc_eh -Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi
```

Fortran benchmarks:
```
-Mvect=cachesize:6291456 -fastsse -Mfprelaxed -Msmartalloc=huge
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi
```

Benchmarks using both Fortran and C:
```
-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi
```

Base Other Flags

C benchmarks:
```
-Mipa=jobs:4
```

C++ benchmarks:
```
-Mipa=jobs:4
```

Fortran benchmarks:
```
-Mipa=jobs:4
```

Benchmarks using both Fortran and C:
```
-Mipa=jobs:4
```

Peak Compiler Invocation

C benchmarks:
```
pgcc
```

C++ benchmarks (except as noted below):
```
pathCC
```

444.namd: `pgcpp`

Fortran benchmarks (except as noted below):
```
pgf95
```

416.gamess: `pathf95`

459.GemsFDTD: `pathf95`

465.tonto: `pathf95`

Continued on next page

Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C (except as noted below):
pathcc pathf95

436.cactusADM: pgcc pgf95

454.calculix: pgcc pgf95

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -Mnomain
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -Mnomain
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2)
-Mipa=fast(pass 2) -Mipa=inline(pass 2)
-Mvect=cachesize:6291456 -fastsse -Mfprelaxed -Msmartalloc
-tp barcelona-64 -Bstatic_pgi

C++ benchmarks:

444.namd: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)
-Mipa=inline(pass 2) -Mvect=cachesize:6291456 -fastsse
-Munroll=n:4 -Munroll=m:8 -Msmartalloc=huge -Mnodepchk
-Mfprelaxed --zc_eh -tp barcelona-64 -Bstatic_pgi

Continued on next page

Peak Optimization Flags (Continued)

447.dealII: `-march=barcelona -Ofast -static -INLINE:aggressive=on -fno-exceptions -m32`

450.soplex: `-march=barcelona -fb_create fbdata`(pass 1) `-fb_opt fbdata`(pass 2) `-L/usr/lib -lhugetlbfs`(pass 2) `-O3 -INLINE:aggressive=on -OPT:IEEE_arith=3 -OPT:IEEE_NaN_Inf=off -OPT:fold_unsigned_relops=on -OPT:malloc_alg=1 -CG:load_exe=0 -fno-exceptions -m32`

453.povray: `-march=barcelona -fb_create fbdata`(pass 1) `-fb_opt fbdata`(pass 2) `-Ofast -INLINE:aggressive=on`

Fortran benchmarks:

410.bwaves: `basepeak = yes`

416.gamess: `-march=barcelona -fb_create fbdata`(pass 1) `-fb_opt fbdata`(pass 2) `-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT`(pass 2) `-L/usr/lib64 -lhugetlbfs`(pass 2) `-O2 -OPT:Ofast -OPT:ro=3 -OPT:unroll_size=256`

434.zeusmp: `-Mvect=cachesize:6291456 -fastsse -Mfprelaxed -Mprefetch=distance:8 -Mprefetch=t0 -Msmartalloc=huge -Msmartalloc=hugebss -Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi`

437.leslie3d: `-Mpfi=indirect`(pass 1) `-Mpfo=indirect`(pass 2) `-Mipa=fast`(pass 2) `-Mipa=inline`(pass 2) `-Mvect=cachesize:6291456 -fastsse -Mvect=fuse -Msmartalloc=huge -Mprefetch=distance:8 -Mprefetch=t0 -Mfprelaxed -tp barcelona-64 -Bstatic_pgi`

459.GemsFDTD: `-march=barcelona -Ofast -LNO:fission=2 -LNO:simd=2 -LNO:prefetch_ahead=1 -CG:load_exe=0 -CG:prefer_lru_reg=off -OPT:malloc_alg=1 -Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT -L/usr/lib64 -lhugetlbfs`

465.tonto: `-march=barcelona -Ofast -OPT:alias=no_f90_pointer_alias -LNO:blocking=off -CG:load_exe=1 -IPA:plimit=525 -OPT:malloc_alg=1 -Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT -L/usr/lib64 -lhugetlbfs`

Benchmarks using both Fortran and C:

435.gromacs: `-march=barcelona -Ofast -OPT:rsqrt=2 -OPT:malloc_alg=1 -Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT -L/usr/lib64 -lhugetlbfs`

Continued on next page

Peak Optimization Flags (Continued)

436.cactusADM: `-Mvect=cachesize:6291456 -fastsse -Mconcur -Msmartalloc=huge -Mfprelaxed -Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi`

454.calculix: `-Mpfi=indirect`(pass 1) `-Mpfo=indirect`(pass 2) `-Mipa=fast`(pass 2) `-Mipa=inline`(pass 2) `-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mprefetch=t0 -Mpre -Mfprelaxed -tp barcelona-64 -Bstatic_pgi`

481.wrf: `-march=barcelona -Ofast -LNO:blocking=off -LNO:prefetch_ahead=10 -LANG:copyinout=off -IPA:callee_limit=5000 -GRA:prioritize_by_density=on -OPT:malloc_alg=1 -m3dnow -Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT -L/usr/lib64 -lhugetlbfs`

Peak Other Flags

C benchmarks:
`-Mipa=jobs:4`(pass 2)

C++ benchmarks:

444.namd: `-Mipa=jobs:4`(pass 2)

Fortran benchmarks (except as noted below):
`-Mipa=jobs:4`(pass 2)

416.gamess: `No flags used`

459.GemsFDTD: `No flags used`

465.tonto: `No flags used`

Benchmarks using both Fortran and C (except as noted below):
`-Mipa=jobs:4`(pass 2)

435.gromacs: `No flags used`

481.wrf: `No flags used`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/pgi72_linux_flags.20090710.html`
`http://www.spec.org/cpu2006/flags/pathscale32-flags.html`
`http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.html`

You can also download the XML flags sources by saving the following links:

```
http://www.spec.org/cpu2006/flags/pgi72_linux_flags.20090710.xml
http://www.spec.org/cpu2006/flags/pathscale32-flags.xml
http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.xml
```


SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 00:22:42 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 26 May 2009.