SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Tyan
(Test Sponsor: Advanced Micro Devices)

Tyan YR190B8228, AMD Opteron 4162 EE

SPECfp®_rate2006 = 132

SPECfp_rate_base2006 = 123

CPU2006 license: 49
Test sponsor: Advanced Micro Devices
Tested by: Advanced Micro Devices

Test date: Aug-2010
Hardware Availability: Aug-2010
Software Availability: Jul-2010

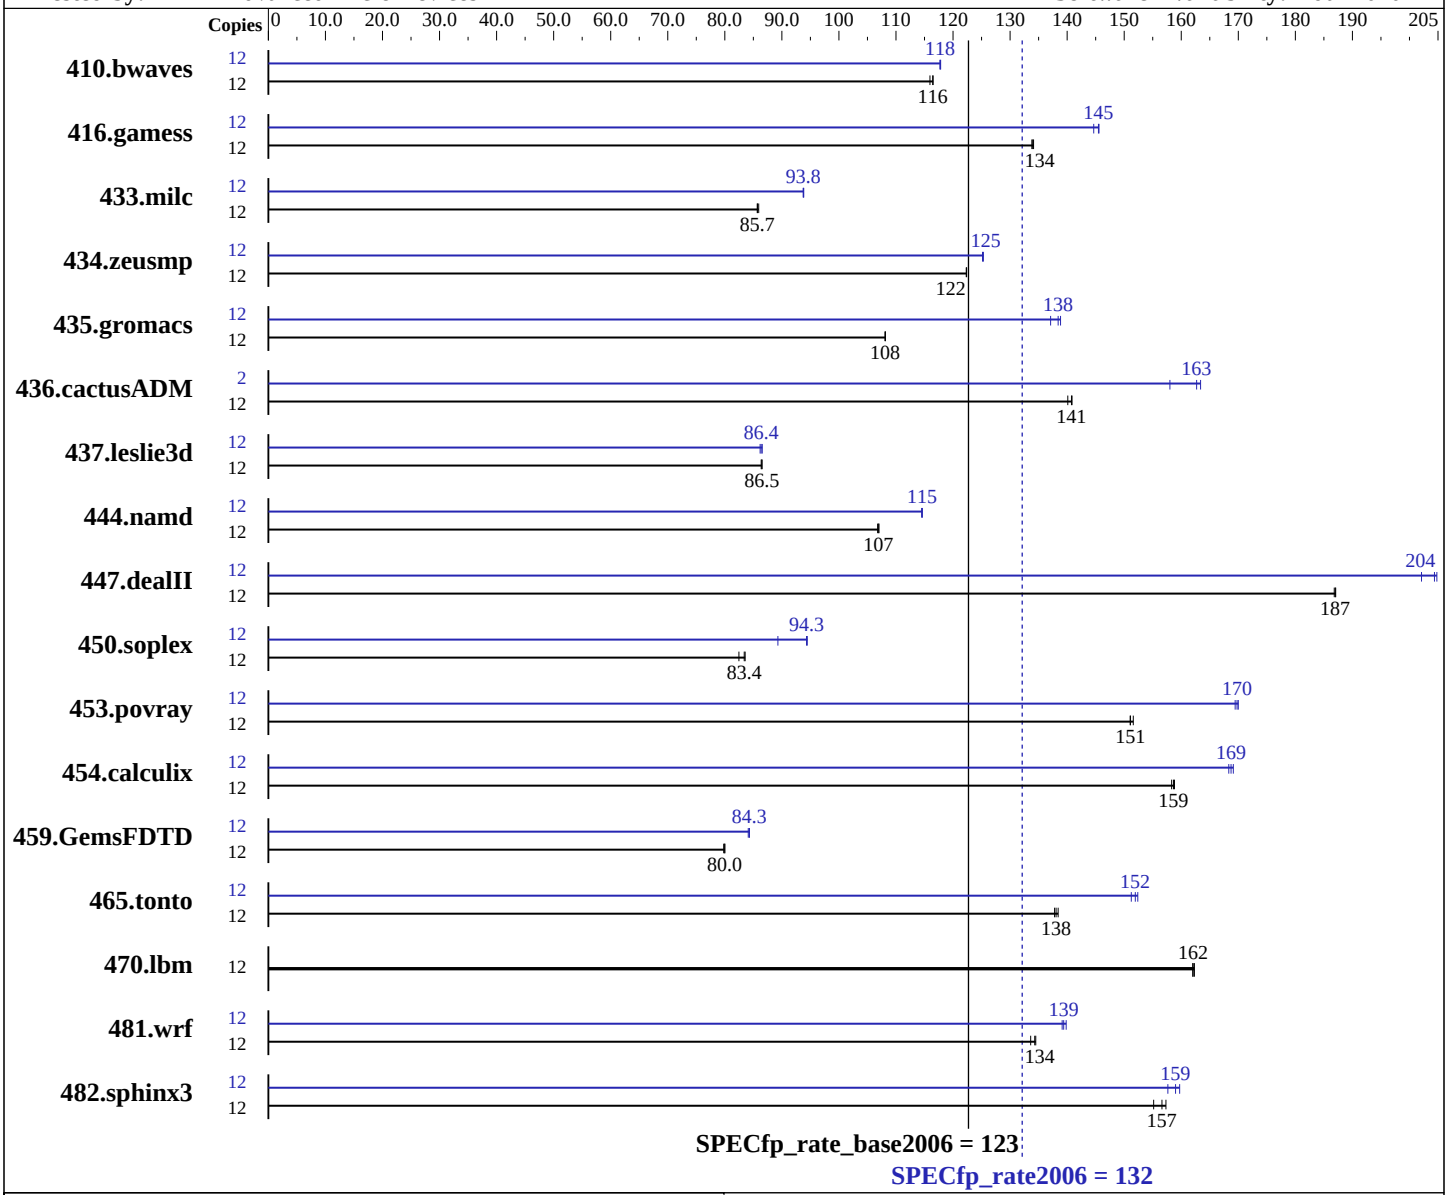

Hardware

CPU Name:	AMD Opteron 4162 EE
CPU Characteristics:	
CPU MHz:	1700
FPU:	Integrated
CPU(s) enabled:	12 cores, 2 chips, 6 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	512 KB I+D on chip per core

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 11 (x86_64), Kernel 2.6.27.19-5-default
Compiler:	x86 Open64 4.2.4 Compiler Suite (from AMD)
Auto Parallel:	Yes
File System:	ext3
System State:	Run level 3 (Full multiuser with network)
Base Pointers:	64-bit
Peak Pointers:	32/64-bit
Other Software:	None

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Tyan
(Test Sponsor: Advanced Micro Devices)

Tyan YR190B8228, AMD Opteron 4162 EE

SPECfp_rate2006 = 132

SPECfp_rate_base2006 = 123

CPU2006 license: 49
Test sponsor: Advanced Micro Devices
Tested by: Advanced Micro Devices

Test date: Aug-2010
Hardware Availability: Aug-2010
Software Availability: Jul-2010

L3 Cache: 6 MB I+D on chip per chip
Other Cache: None
Memory: 32 GB (4 x 8 GB, DDR3-1333, CL9, Reg, Dual Rank)
Disk Subsystem: 1 x 128 GB SATA SSD, Western Digital SiliconEdge Blue SSC-D0128SC-2100
Other Hardware: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	12	1406	116	**1401**	**116**	1400	117	12	1385	118	**1385**	**118**	1384	118
416.gamess	12	1752	134	1756	134	**1754**	**134**	12	**1615**	**145**	1624	145	1614	146
433.milc	12	1282	85.9	1286	85.7	**1285**	**85.7**	12	1175	93.7	**1175**	**93.8**	1174	93.8
434.zeusmp	12	**893**	**122**	893	122	892	122	12	871	125	872	125	**872**	**125**
435.gromacs	12	793	108	792	108	**792**	**108**	12	625	137	617	139	**619**	**138**
436.cactusADM	12	1018	141	**1019**	**141**	1023	140	2	151	158	146	163	**147**	**163**
437.leslie3d	12	1304	86.5	**1304**	**86.5**	1306	86.4	12	1303	86.6	1309	86.2	**1306**	**86.4**
444.namd	12	901	107	899	107	**900**	**107**	12	840	115	841	114	**840**	**115**
447.dealII	12	734	187	735	187	**734**	**187**	12	679	202	**672**	**204**	670	205
450.soplex	12	1214	82.5	**1200**	**83.4**	1198	83.6	12	1121	89.3	**1061**	**94.3**	1060	94.5
453.povray	12	**422**	**151**	423	151	421	152	12	377	169	**376**	**170**	376	170
454.calculix	12	623	159	**624**	**159**	625	158	12	585	169	**587**	**169**	588	168
459.GemsFDTD	12	1595	79.8	**1592**	**80.0**	1591	80.0	12	1514	84.1	1510	84.3	**1511**	**84.3**
465.tonto	12	853	138	857	138	**855**	**138**	12	781	151	**777**	**152**	775	152
470.lbm	12	1018	162	1016	162	**1017**	**162**	12	1018	162	1016	162	**1017**	**162**
481.wrf	12	997	134	1003	134	**998**	**134**	12	959	140	963	139	**962**	**139**
482.sphinx3	12	1507	155	**1493**	**157**	1487	157	12	1484	158	1464	160	**1471**	**159**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152'  was used to set environment locked pages in memory limit

Set vm/nr_hugepages=5400 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages
```

General Notes

```
Environment variables set by runspec before the start of the run:
HUGETLB_LIMIT = "450"
LD_LIBRARY_PATH = "/root/work/cpu2006/amd1002li-rate-libs-revC/64:/root/work/cpu2006/amd1002li-rate-libs-revC/32"
OMP_NUM_THREADS = "6"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at
http://developer.amd.com/cpu/open64
Binaries were compiled on SLES10 SP2 with binutils 2.18
```

Base Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Fortran benchmarks:
openf95

Benchmarks using both Fortran and C:
opencc openf95

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG -fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
```
-march=barcelona -mso -Ofast -OPT:malloc_alg=1 -HP:bdt=2m
```

C++ benchmarks:
```
-march=barcelona -mso -Ofast -static -INLINE:aggressive=on
-OPT:malloc_alg=1 -HP:bdt=2m
```

Fortran benchmarks:
```
-march=barcelona -mso -Ofast -HP
```

Benchmarks using both Fortran and C:
```
-march=barcelona -mso -Ofast -OPT:malloc_alg=1 -HP:bdt=2m -HP
```

Peak Compiler Invocation

C benchmarks:
```
opencc
```

C++ benchmarks:
```
openCC
```

Fortran benchmarks:
```
openf95
```

Benchmarks using both Fortran and C:
```
opencc openf95
```

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG
-fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: -march=barcelona -mso -Ofast -CG:movnti=1
-CG:local_sched_alg=1 -CG:locs_shallow_depth=1
-HP:bdt=2m:heap=2m -LNO:prefetch=3

470.lbm: basepeak = yes

482.sphinx3: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -OPT:malloc_alg=2
-CG:sse_cse_regs=0 -CG:locs_shallow_depth=1 -CG:cmp_peep=on
-CG:local_sched_alg=1 -INLINE:aggressive=on

C++ benchmarks:

444.namd: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -LNO:ignore_feedback=off
-CG:local_sched_alg=2 -CG:load_exe=0 -CG:compute_to=on
-OPT:unroll_size=256 -fno-exceptions -HP:bdt=2m:heap=2m

447.dealII: -march=barcelona -mso -Ofast -static -INLINE:aggressive=on
-LNO:opt=0 -fno-emit-exceptions -m32
-OPT:unroll_times_max=8 -OPT:unroll_size=256
-OPT:unroll_level=2 -HP:bdt=2m:heap=2m -GRA:unspill=on
-CG:cmp_peep=on -TENV:frame_pointer=off

450.soplex: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -INLINE:aggressive=on
-OPT:IEEE_arith=3 -OPT:IEEE_NaN_Inf=off
-OPT:fold_unsigned_relops=on -OPT:malloc_alg=1
-CG:load_exe=0 -fno-exceptions -m32 -HP:bdt=2m

453.povray: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -INLINE:aggressive=on

Fortran benchmarks:

410.bwaves: -march=barcelona -mso -O3 -OPT:Ofast -OPT:treeheight=on
-LNO:blocking=off -LNO:prefetch_ahead=5
-LNO:ignore_feedback=off -WOPT:aggstr=0 -HP:bdt=2m:heap=2m
-CG:cmp_peep=on

416.gamess: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -LNO:fu=6 -LNO:blocking=0
-LNO:prefetch=0 -OPT:Ofast -OPT:ro=3 -OPT:unroll_size=256
-HP:bdt=2m:heap=2m

434.zeusmp: -march=barcelona -mso -Ofast -LNO:blocking=off
-LNO:interchange=off -OPT:treeheight=on -OPT:unroll_size=256
-CG:cmp_peep=on -GRA:prioritize_by_density=on -HP

Continued on next page

Peak Optimization Flags (Continued)

437.leslie3d: `-march=barcelona -mso -Ofast -HP:bdt=2m:heap=2m`

459.GemsFDTD: `-march=barcelona -mso -Ofast -LNO:fission=2 -LNO:prefetch_ahead=1 -CG:load_exe=0 -CG:local_sched_alg=1 -HP`

465.tonto: `-march=barcelona -mso -Ofast -OPT:alias=no_f90_pointer_alias -LNO:blocking=off -CG:load_exe=1 -IPA:plimit=525 -HP`

Benchmarks using both Fortran and C:

435.gromacs: `-march=barcelona -mso -Ofast -OPT:rsqrt=2 -HP:bdt=2m:heap=2m`

436.cactusADM: `-march=barcelona -mso -fb_create fbdata`(pass 1) `-fb_opt fbdata`(pass 2) `-Ofast -apo -LNO:prefetch_ahead=1 -HP:bdt=2m:heap=2m -LANG:heap_allocation_threshold=100`

454.calculix: `-march=barcelona -mso -Ofast -CG:load_exe=0 -CG:ptr_load_use=0 -CG:local_sched_alg=2 -CG:compute_to=on -LNO:prefetch_ahead=30 -WOPT:unroll=2 -GRA:optimize_boundary=on -HP:bdt=2m:heap=2m`

481.wrf: `-march=barcelona -mso -Ofast -LNO:blocking=off -LNO:prefetch_ahead=10 -LANG:copyinout=off -IPA:callee_limit=5000 -GRA:prioritize_by_density=on -m3dnow -HP`

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/x86-open64-424-flags-rate-revC.html
http://www.spec.org/cpu2006/flags/amd-platform-rate-revC.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/x86-open64-424-flags-rate-revC.xml
http://www.spec.org/cpu2006/flags/amd-platform-rate-revC.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 12:26:06 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 31 August 2010.