SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 1022G-NTF,
AMD Opteron 6172

SPECfp®2006 = 29.8

SPECfp_base2006 = 21.5

CPU2006 license: 49
Test sponsor: Advanced Micro Devices
Tested by: Advanced Micro Devices

Test date: Oct-2010
Hardware Availability: Mar-2010
Software Availability: May-2010

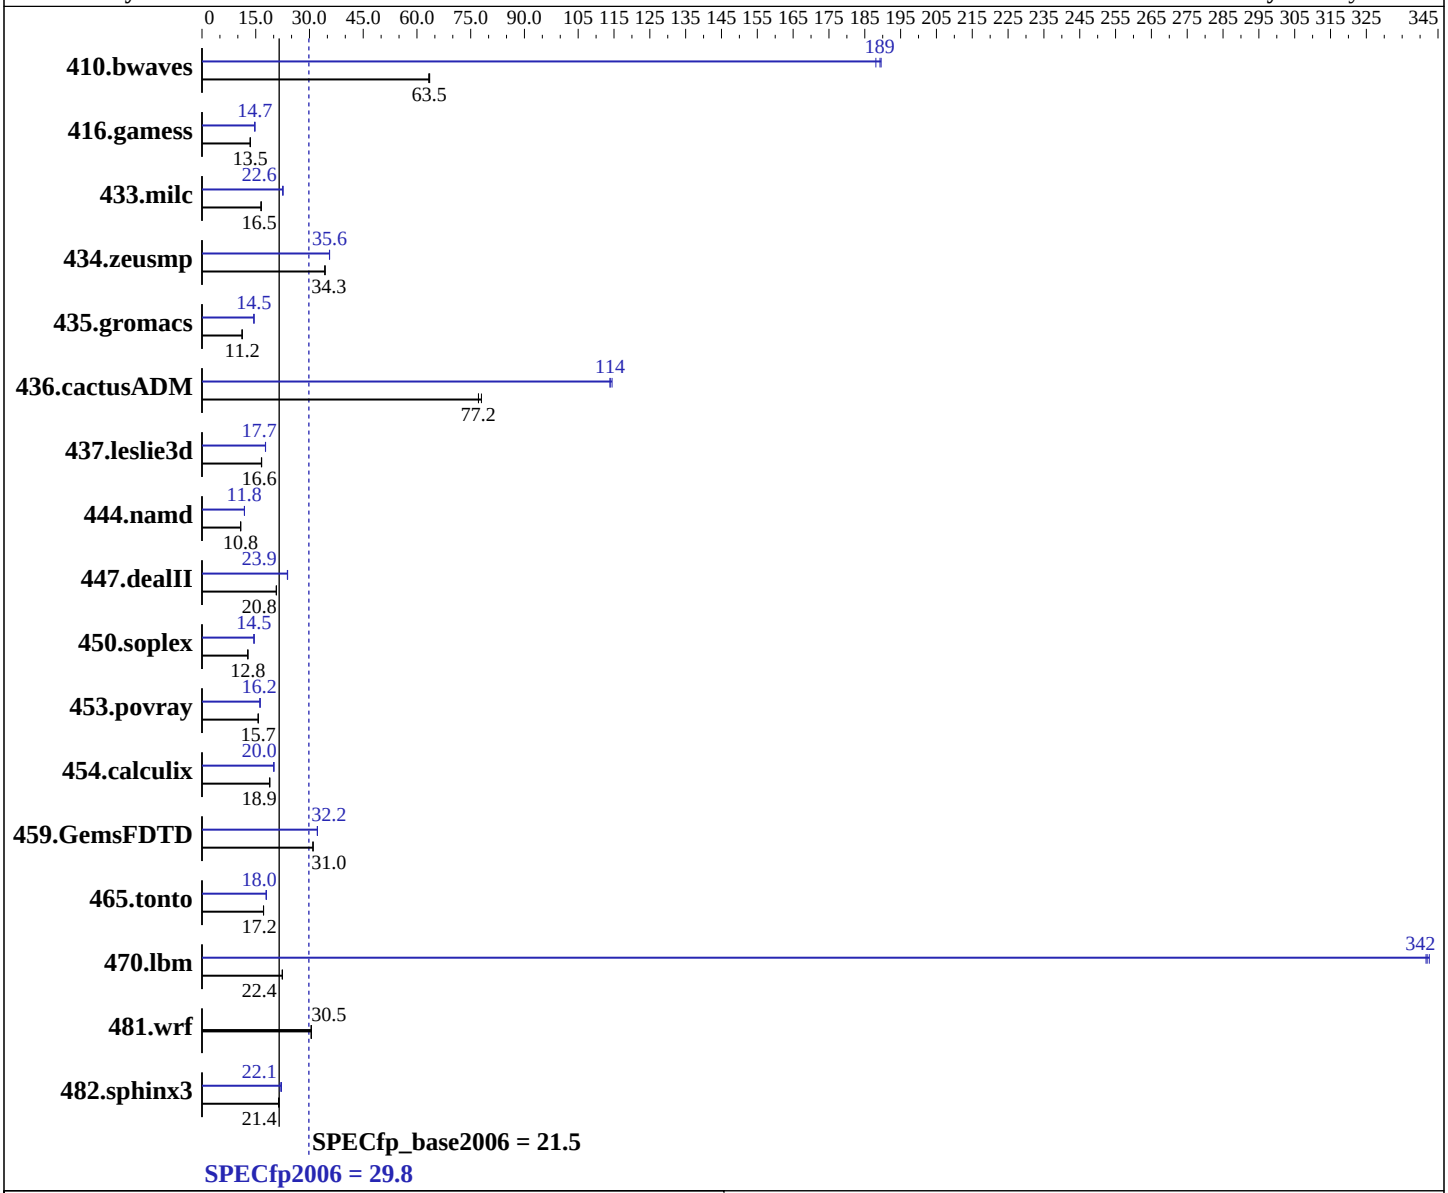

Hardware

CPU Name:	AMD Opteron 6172
CPU Characteristics:	
CPU MHz:	2100
FPU:	Integrated
CPU(s) enabled:	24 cores, 2 chips, 12 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	512 KB I+D on chip per core

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server release 5.4, Advanced Platform with patch RHSA-2009:1670, Kernel 2.6.18-164.9.1.el5
Compiler:	x86 Open64 4.2.3.2 Compiler Suite (from AMD)
Auto Parallel:	Yes
File System:	ext3
System State:	Run level 3 (Full multiuser with network)
Base Pointers:	64-bit
Peak Pointers:	32/64-bit

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro
(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 1022G-NTF,
AMD Opteron 6172

SPECfp2006 = 29.8

SPECfp_base2006 = 21.5

CPU2006 license: 49
Test sponsor: Advanced Micro Devices
Tested by: Advanced Micro Devices

Test date: Oct-2010
Hardware Availability: Mar-2010
Software Availability: May-2010

L3 Cache: 12 MB I+D on chip per chip, 6 MB shared / 6 cores
Other Cache: None
Memory: 64 GB (16 x 4 GB 2Rx4 PC3-10600R-9, ECC)
Disk Subsystem: 1 x 250 GB SATA, 7200 RPM
Other Hardware: None

Other Software: binutils 2.18

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	214	63.6	**214**	**63.5**	215	63.3	72.3	188	**71.8**	**189**	71.7	190
416.gamess	1455	13.5	1452	13.5	**1453**	**13.5**	1330	14.7	1327	14.8	**1328**	**14.7**
433.milc	555	16.6	558	16.4	**555**	**16.5**	**406**	**22.6**	406	22.6	408	22.5
434.zeusmp	266	34.3	**265**	**34.3**	265	34.4	**256**	**35.6**	256	35.6	256	35.6
435.gromacs	636	11.2	**637**	**11.2**	638	11.2	493	14.5	492	14.5	**492**	**14.5**
436.cactusADM	155	77.2	153	78.0	**155**	**77.2**	**105**	**114**	105	114	104	114
437.leslie3d	564	16.7	**566**	**16.6**	567	16.6	**530**	**17.7**	531	17.7	530	17.7
444.namd	743	10.8	744	10.8	**743**	**10.8**	**677**	**11.8**	677	11.8	676	11.9
447.dealII	551	20.8	551	20.7	**551**	**20.8**	479	23.9	**479**	**23.9**	480	23.8
450.soplex	653	12.8	**652**	**12.8**	651	12.8	**575**	**14.5**	575	14.5	573	14.6
453.povray	339	15.7	**339**	**15.7**	339	15.7	328	16.2	329	16.2	**328**	**16.2**
454.calculix	**436**	**18.9**	436	18.9	438	18.8	411	20.1	**411**	**20.0**	412	20.0
459.GemsFDTD	342	31.0	342	31.0	**342**	**31.0**	**329**	**32.2**	329	32.2	329	32.2
465.tonto	572	17.2	**573**	**17.2**	573	17.2	**547**	**18.0**	547	18.0	550	17.9
470.lbm	**613**	**22.4**	612	22.4	613	22.4	40.1	343	40.2	342	**40.2**	**342**
481.wrf	**366**	**30.5**	366	30.5	366	30.5	**366**	**30.5**	366	30.5	366	30.5
482.sphinx3	**911**	**21.4**	907	21.5	912	21.4	893	21.8	**880**	**22.1**	878	22.2

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152'  was used to set environment locked pages in memory limit

Set vm/nr_hugepages=4000 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages

cpuspeed stop was used to set the CPU frequency to its maximum.
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/root/work/cpu2006/amd1002mc-speed-libs-revA/64:/root/work/cpu2006/amd1002mc-speed-libs-revA/32"
O64_OMP_AFFINITY_MAP = "0,1,2,3,4,5,6,7,8,9,10,11,12,13,14,15,16,17,18,19,20,21,22,23"
O64_OMP_SPIN_USER_LOCK = "true"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at
http://developer.amd.com/cpu/open64
```

Base Compiler Invocation

C benchmarks:
`opencc`

C++ benchmarks:
`openCC`

Fortran benchmarks:
`openf95`

Benchmarks using both Fortran and C:
`opencc openf95`

Base Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
416.gamess: `-DSPEC_CPU_LP64`
433.milc: `-DSPEC_CPU_LP64`
434.zeusmp: `-DSPEC_CPU_LP64`
435.gromacs: `-DSPEC_CPU_LP64`
436.cactusADM: `-DSPEC_CPU_LP64 -fno-second-underscore`
437.leslie3d: `-DSPEC_CPU_LP64`
444.namd: `-DSPEC_CPU_LP64`
447.dealII: `-DSPEC_CPU_LP64`
450.soplex: `-DSPEC_CPU_LP64`
453.povray: `-DSPEC_CPU_LP64`
454.calculix: `-DSPEC_CPU_LP64`
459.GemsFDTD: `-DSPEC_CPU_LP64`
465.tonto: `-DSPEC_CPU_LP64`
470.lbm: `-DSPEC_CPU_LP64`
481.wrf: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG -fno-second-underscore`
482.sphinx3: `-DSPEC_CPU_LP64`

Base Optimization Flags

C benchmarks:
```
-march=barcelona -Ofast -HP:bdt=2m:heap=2m
```

C++ benchmarks:
```
-march=barcelona -Ofast -static -INLINE:aggressive=on
-HP:bdt=2m:heap=2m
```

Fortran benchmarks:
```
-march=barcelona -Ofast -apo -LNO:parallel_overhead=10000
-LNO:fusion_peeling_limit=0 -HP:bdt=2m:heap=2m
```

Benchmarks using both Fortran and C:
```
-march=barcelona -Ofast -HP:bdt=2m:heap=2m -apo
-LNO:parallel_overhead=10000 -LNO:fusion_peeling_limit=0
```

Peak Compiler Invocation

C benchmarks:
```
opencc
```

C++ benchmarks:
```
openCC
```

Fortran benchmarks:
```
openf95
```

Benchmarks using both Fortran and C:
```
opencc openf95
```

Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
416.gamess: `-DSPEC_CPU_LP64`
433.milc: `-DSPEC_CPU_LP64`
434.zeusmp: `-DSPEC_CPU_LP64`
435.gromacs: `-DSPEC_CPU_LP64`
436.cactusADM: `-DSPEC_CPU_LP64 -fno-second-underscore`
437.leslie3d: `-DSPEC_CPU_LP64`
444.namd: `-DSPEC_CPU_LP64`
453.povray: `-DSPEC_CPU_LP64`
454.calculix: `-DSPEC_CPU_LP64`
459.GemsFDTD: `-DSPEC_CPU_LP64`
465.tonto: `-DSPEC_CPU_LP64`
470.lbm: `-DSPEC_CPU_LP64`
481.wrf: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG -fno-second-underscore`

Continued on next page

Peak Portability Flags (Continued)

482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: -march=barcelona -Ofast -apo -CG:movnti=1
-CG:local_sched_alg=1 -CG:locs_shallow_depth=1
-CG:compute_to=on -HP:bdt=2m:heap=2m -LNO:prefetch=3

470.lbm: -march=barcelona -Ofast -mso -apo -CG:sse_cse_regs=0
-LNO:prefetch_ahead=4 -CG:locs_shallow_depth=1
-CG:cmp_peep=on -CG:compute_to=on -OPT:unroll_times_max=8
-OPT:unroll_size=256 -OPT:unroll_level=2 -OPT:keep_ext=on
-OPT:alias=restricted -m3dnow -IPA:inline=off

482.sphinx3: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -OPT:malloc_alg=2
-CG:sse_cse_regs=0 -CG:locs_shallow_depth=1 -CG:cmp_peep=on
-CG:local_sched_alg=1 -INLINE:aggressive=on

C++ benchmarks:

444.namd: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -LNO:ignore_feedback=off
-CG:local_sched_alg=2 -CG:load_exe=0 -CG:compute_to=on
-OPT:unroll_size=256 -fno-exceptions -HP:bdt=2m:heap=2m

447.dealII: -march=barcelona -Ofast -static -INLINE:aggressive=on
-LNO:opt=0 -fno-emit-exceptions -m32
-OPT:unroll_times_max=8 -OPT:unroll_size=256
-OPT:unroll_level=2 -HP:bdt=2m:heap=2m -GRA:unspill=on
-CG:cmp_peep=on -TENV:frame_pointer=off

450.soplex: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -INLINE:aggressive=on
-OPT:IEEE_arith=3 -OPT:IEEE_NaN_Inf=off
-OPT:fold_unsigned_relops=on -CG:load_exe=0 -fno-exceptions
-m32 -HP:bdt=2m:heap=2m

453.povray: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -INLINE:aggressive=on
-HP:bdt=2m:heap=2m

Fortran benchmarks:

410.bwaves: -march=barcelona -Ofast -apo -OPT:malloc_alg=2
-CG:use_prefetchnta=on -CG:cmp_peep=on -LNO:blocking=off
-LNO:prefetch=3 -LNO:prefetch_ahead=5

Continued on next page

Peak Optimization Flags (Continued)

410.bwaves (continued):
-LNO:ignore_feedback=off -LNO:apo_use_feedback=on
-WOPT:aggstr=0

416.gamess: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -LNO:fu=6 -LNO:blocking=0
-LNO:prefetch=0 -OPT:Ofast -OPT:ro=3 -OPT:unroll_size=256
-HP:bdt=2m:heap=2m

434.zeusmp: -march=barcelona -Ofast -apo -LNO:blocking=off
-LNO:interchange=off -LNO:fusion_peeling_limit=0
-OPT:treeheight=on -OPT:unroll_size=256 -CG:cmp_peep=on
-CG:compute_to=on -GRA:prioritize_by_density=on
-HP:bdt=2m:heap=2m

437.leslie3d: -march=barcelona -Ofast -apo -OPT:unroll_size=256
-LNO:prefetch_ahead=4 -LNO:parallel_overhead=32768
-GRA:prioritize_by_density=on -m3dnow -HP:bdt=2m:heap=2m

459.GemsFDTD: -march=barcelona -Ofast -apo -LNO:fission=2
-LNO:prefetch_ahead=1 -CG:load_exe=0 -CG:local_sched_alg=1
-HP

465.tonto: -march=barcelona -Ofast -apo
-OPT:alias=no_f90_pointer_alias -LNO:blocking=off
-CG:load_exe=1 -IPA:plimit=525 -HP

Benchmarks using both Fortran and C:

435.gromacs: -march=barcelona -Ofast -apo -OPT:rsqrt=2
-HP:bdt=2m:heap=2m

436.cactusADM: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -apo
-LANG:heap_allocation_threshold=1000 -LNO:prefetch_ahead=1
-HP:bdt=2m:heap=2m

454.calculix: -march=barcelona -Ofast -LNO:prefetch_ahead=30
-CG:load_exe=0 -CG:ptr_load_use=0 -CG:local_sched_alg=2
-CG:compute_to=on -WOPT:unroll=2 -GRA:optimize_boundary=on
-HP:bdt=2m:heap=2m -apo

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/x86-open64-423-flags-speed-revA.20101207.html
http://www.spec.org/cpu2006/flags/amd-platform-speed-revA.20101207.html

You can also download the XML flags sources by saving the following links:

`http://www.spec.org/cpu2006/flags/x86-open64-423-flags-speed-revA.20101207.xml`
`http://www.spec.org/cpu2006/flags/amd-platform-speed-revA.20101207.xml`

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 14:07:35 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 7 December 2010.