SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 2042G-6RF,
AMD Opteron 6124 HE

SPECfp®2006 = 26.8

SPECfp_base2006 = 18.4

CPU2006 license: 49
Test sponsor: Advanced Micro Devices
Tested by: Advanced Micro Devices

Test date: Nov-2010
Hardware Availability: Mar-2010
Software Availability: May-2010

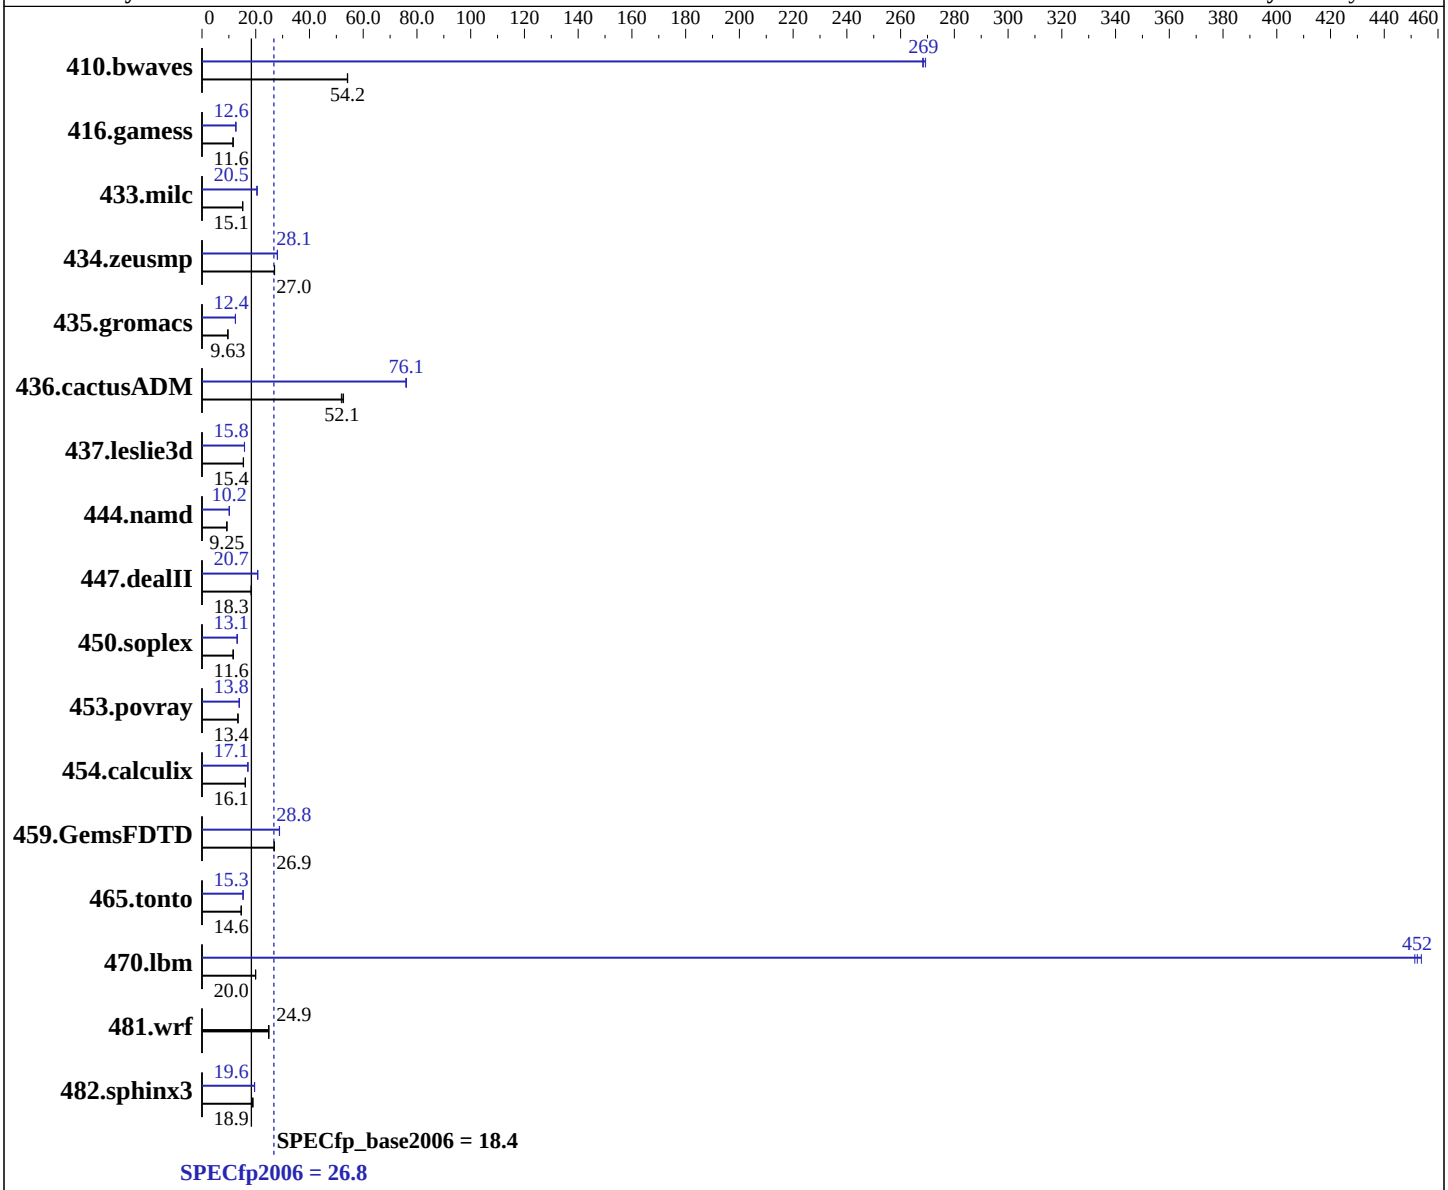

Hardware

CPU Name:	AMD Opteron 6124 HE
CPU Characteristics:	
CPU MHz:	1800
FPU:	Integrated
CPU(s) enabled:	32 cores, 4 chips, 8 cores/chip
CPU(s) orderable:	2,4 chips
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	512 KB I+D on chip per core

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server release 5.5, Advanced Platform, Kernel 2.6.18-194.el5
Compiler:	x86 Open64 4.2.3.2 Compiler Suite (from AMD)
Auto Parallel:	Yes
File System:	ext3
System State:	Run level 3 (Full multiuser with network)
Base Pointers:	64-bit
Peak Pointers:	32/64-bit
Other Software:	binutils 2.18

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro
(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 2042G-6RF,
AMD Opteron 6124 HE

SPECfp2006 = 26.8

SPECfp_base2006 = 18.4

CPU2006 license: 49
Test sponsor: Advanced Micro Devices
Tested by: Advanced Micro Devices

Test date: Nov-2010
Hardware Availability: Mar-2010
Software Availability: May-2010

L3 Cache: 12 MB I+D on chip per chip, 6 MB shared / 4 cores
Other Cache: None
Memory: 128 GB (32 x 4 GB 2Rx4 PC3-10600R-9, ECC)
Disk Subsystem: 1 x 250 GB SATA, 7200 RPM
Other Hardware: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	**251**	**54.2**	251	54.1	251	54.2	50.7	268	**50.6**	**269**	50.5	269
416.gamess	**1690**	**11.6**	1694	11.6	1690	11.6	1556	12.6	1553	12.6	**1554**	**12.6**
433.milc	604	15.2	608	15.1	**606**	**15.1**	448	20.5	449	20.4	**448**	**20.5**
434.zeusmp	338	26.9	337	27.0	**337**	**27.0**	324	28.1	**324**	**28.1**	325	28.0
435.gromacs	741	9.64	**741**	**9.63**	742	9.62	574	12.4	**574**	**12.4**	573	12.5
436.cactusADM	**229**	**52.1**	230	51.9	227	52.7	**157**	**76.1**	157	76.1	158	75.9
437.leslie3d	**610**	**15.4**	608	15.5	612	15.4	595	15.8	593	15.8	**594**	**15.8**
444.namd	**867**	**9.25**	868	9.24	865	9.27	**790**	**10.2**	790	10.2	789	10.2
447.dealII	624	18.3	**624**	**18.3**	623	18.4	552	20.7	**552**	**20.7**	552	20.7
450.soplex	716	11.6	721	11.6	**718**	**11.6**	640	13.0	**636**	**13.1**	633	13.2
453.povray	**397**	**13.4**	399	13.3	397	13.4	382	13.9	**384**	**13.8**	385	13.8
454.calculix	513	16.1	**511**	**16.1**	511	16.2	483	17.1	**483**	**17.1**	483	17.1
459.GemsFDTD	395	26.9	395	26.9	**395**	**26.9**	368	28.8	368	28.9	**368**	**28.8**
465.tonto	**674**	**14.6**	671	14.7	676	14.6	645	15.3	642	15.3	**644**	**15.3**
470.lbm	**688**	**20.0**	688	20.0	689	19.9	30.3	454	**30.4**	**452**	30.4	451
481.wrf	**449**	**24.9**	451	24.7	449	24.9	**449**	**24.9**	451	24.7	449	24.9
482.sphinx3	1034	18.8	1028	19.0	**1031**	**18.9**	**996**	**19.6**	997	19.5	996	19.6

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152'  was used to set environment locked pages in memory limit

Set vm/nr_hugepages=8000 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages

cpuspeed stop was used to set the CPU frequency to its maximum.
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/root/work/cpu2006/amd1002mc-speed-libs-revA/64:/root/work/cpu2006/amd1002mc-speed-libs-revA/32"
O64_OMP_AFFINITY_MAP = "0,1,2,3,4,5,6,7,8,9,10,11,12,13,14,15,16,17,18,19,20,21,22,23,24,25,26,27,28,29,30,31"
O64_OMP_SPIN_USER_LOCK = "true"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at
http://developer.amd.com/cpu/open64
```

Base Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Fortran benchmarks:
openf95

Benchmarks using both Fortran and C:
opencc openf95

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG
-fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
```
-march=barcelona -Ofast -HP:bdt=2m:heap=2m
```

C++ benchmarks:
```
-march=barcelona -Ofast -static -INLINE:aggressive=on
-HP:bdt=2m:heap=2m
```

Fortran benchmarks:
```
-march=barcelona -Ofast -apo -LNO:parallel_overhead=10000
-LNO:fusion_peeling_limit=0 -HP:bdt=2m:heap=2m
```

Benchmarks using both Fortran and C:
```
-march=barcelona -Ofast -HP:bdt=2m:heap=2m -apo
-LNO:parallel_overhead=10000 -LNO:fusion_peeling_limit=0
```

Peak Compiler Invocation

C benchmarks:
```
opencc
```

C++ benchmarks:
```
openCC
```

Fortran benchmarks:
```
openf95
```

Benchmarks using both Fortran and C:
```
opencc openf95
```

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG
-fno-second-underscore

Continued on next page

Peak Portability Flags (Continued)

482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: -march=barcelona -Ofast -apo -CG:movnti=1
-CG:local_sched_alg=1 -CG:locs_shallow_depth=1
-CG:compute_to=on -HP:bdt=2m:heap=2m -LNO:prefetch=3

470.lbm: -march=barcelona -Ofast -mso -apo -CG:sse_cse_regs=0
-LNO:prefetch_ahead=4 -CG:locs_shallow_depth=1
-CG:cmp_peep=on -CG:compute_to=on -OPT:unroll_times_max=8
-OPT:unroll_size=256 -OPT:unroll_level=2 -OPT:keep_ext=on
-OPT:alias=restricted -m3dnow -IPA:inline=off

482.sphinx3: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -OPT:malloc_alg=2
-CG:sse_cse_regs=0 -CG:locs_shallow_depth=1 -CG:cmp_peep=on
-CG:local_sched_alg=1 -INLINE:aggressive=on

C++ benchmarks:

444.namd: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -LNO:ignore_feedback=off
-CG:local_sched_alg=2 -CG:load_exe=0 -CG:compute_to=on
-OPT:unroll_size=256 -fno-exceptions -HP:bdt=2m:heap=2m

447.dealII: -march=barcelona -Ofast -static -INLINE:aggressive=on
-LNO:opt=0 -fno-emit-exceptions -m32
-OPT:unroll_times_max=8 -OPT:unroll_size=256
-OPT:unroll_level=2 -HP:bdt=2m:heap=2m -GRA:unspill=on
-CG:cmp_peep=on -TENV:frame_pointer=off

450.soplex: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -INLINE:aggressive=on
-OPT:IEEE_arith=3 -OPT:IEEE_NaN_Inf=off
-OPT:fold_unsigned_relops=on -CG:load_exe=0 -fno-exceptions
-m32 -HP:bdt=2m:heap=2m

453.povray: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -INLINE:aggressive=on
-HP:bdt=2m:heap=2m

Fortran benchmarks:

410.bwaves: -march=barcelona -Ofast -apo -OPT:malloc_alg=2
-CG:use_prefetchnta=on -CG:cmp_peep=on -LNO:blocking=off
-LNO:prefetch=3 -LNO:prefetch_ahead=5

Continued on next page

Peak Optimization Flags (Continued)

410.bwaves (continued):
-LNO:ignore_feedback=off -LNO:apo_use_feedback=on
-WOPT:aggstr=0

416.gamess: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -LNO:fu=6 -LNO:blocking=0
-LNO:prefetch=0 -OPT:Ofast -OPT:ro=3 -OPT:unroll_size=256
-HP:bdt=2m:heap=2m

434.zeusmp: -march=barcelona -Ofast -apo -LNO:blocking=off
-LNO:interchange=off -LNO:fusion_peeling_limit=0
-OPT:treeheight=on -OPT:unroll_size=256 -CG:cmp_peep=on
-CG:compute_to=on -GRA:prioritize_by_density=on
-HP:bdt=2m:heap=2m

437.leslie3d: -march=barcelona -Ofast -apo -OPT:unroll_size=256
-LNO:prefetch_ahead=4 -LNO:parallel_overhead=32768
-GRA:prioritize_by_density=on -m3dnow -HP:bdt=2m:heap=2m

459.GemsFDTD: -march=barcelona -Ofast -apo -LNO:fission=2
-LNO:prefetch_ahead=1 -CG:load_exe=0 -CG:local_sched_alg=1
-HP

465.tonto: -march=barcelona -Ofast -apo
-OPT:alias=no_f90_pointer_alias -LNO:blocking=off
-CG:load_exe=1 -IPA:plimit=525 -HP

Benchmarks using both Fortran and C:

435.gromacs: -march=barcelona -Ofast -apo -OPT:rsqrt=2
-HP:bdt=2m:heap=2m

436.cactusADM: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -apo
-LANG:heap_allocation_threshold=1000 -LNO:prefetch_ahead=1
-HP:bdt=2m:heap=2m

454.calculix: -march=barcelona -Ofast -LNO:prefetch_ahead=30
-CG:load_exe=0 -CG:ptr_load_use=0 -CG:local_sched_alg=2
-CG:compute_to=on -WOPT:unroll=2 -GRA:optimize_boundary=on
-HP:bdt=2m:heap=2m -apo

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/x86-open64-423-flags-speed-revA.20101207.html
http://www.spec.org/cpu2006/flags/amd-platform-speed-revA.20101207.html

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2006/flags/x86-open64-423-flags-speed-revA.20101207.xml
http://www.spec.org/cpu2006/flags/amd-platform-speed-revA.20101207.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 14:04:52 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 7 December 2010.