SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

Intel DH67BLB3 Motherboard (Intel Core i5-2500S)

SPECint®_rate2006 = 114

SPECint_rate_base2006 = 111

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Jul-2011
Hardware Availability: Mar-2011
Software Availability: Apr-2011

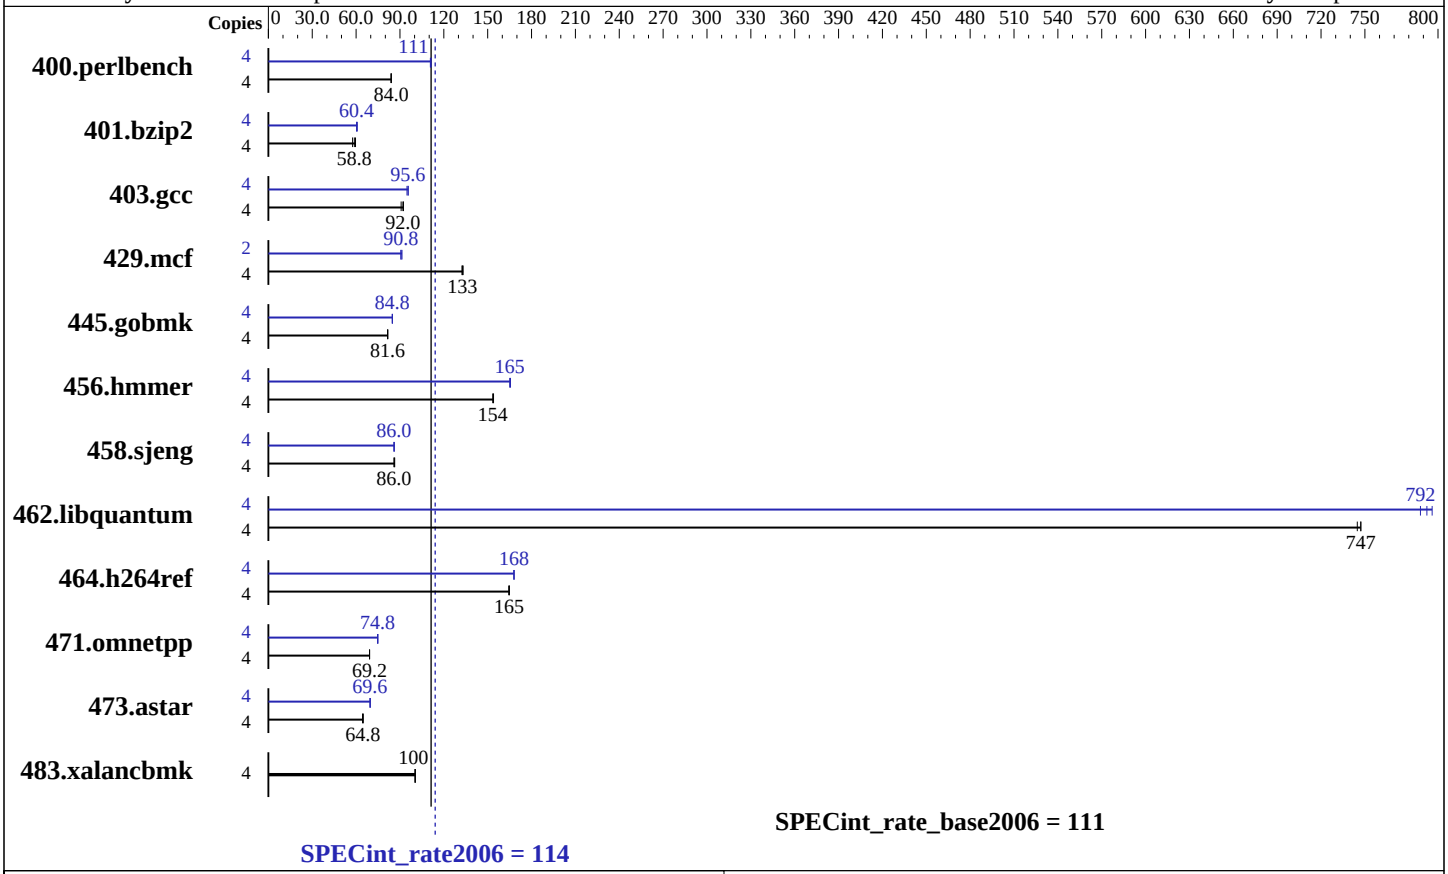

Hardware

CPU Name:	Intel Core i5-2500S
CPU Characteristics:	Intel Turbo Boost Technology up to 3.7 GHz
CPU MHz:	2700
FPU:	Integrated
CPU(s) enabled:	4 cores, 1 chip, 4 cores/chip
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	6 MB I+D on chip per chip
Other Cache:	None
Memory:	4 GB (2 x 2 GB 2Rx8 PC3-10600U-9)
Disk Subsystem:	Seagate 1 TB SATA, 7200 RPM
Other Hardware:	None

Software

Operating System:	Windows 7 Ultimate (64-bit)
Compiler:	Intel C++ Compiler XE for IA32 and Intel 64 Version 12.0.3.176 Build 20110309 Microsoft Visual Studio 2008 Professional SP1 (for libraries)
Auto Parallel:	No
File System:	NTFS
System State:	Default
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	SmartHeap Library Version 9.01 from http://www.microquill.com/

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

Intel DH67BLB3 Motherboard (Intel Core i5-2500S)

SPECint_rate2006 = 114

SPECint_rate_base2006 = 111

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Jul-2011
Hardware Availability: Mar-2011
Software Availability: Apr-2011

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	466	84.0	**466**	**84.0**	465	84.0	4	352	111	**352**	**111**	352	111
401.bzip2	4	669	57.6	649	59.6	**655**	**58.8**	4	**639**	**60.4**	636	60.8	639	60.4
403.gcc	4	354	90.8	348	92.4	**350**	**92.0**	4	339	94.8	336	95.6	**337**	**95.6**
429.mcf	4	276	132	274	133	**274**	**133**	2	201	90.6	199	91.4	**201**	**90.8**
445.gobmk	4	**515**	**81.6**	515	81.6	515	81.6	4	495	84.8	**495**	**84.8**	496	84.8
456.hmmer	4	243	154	**243**	**154**	242	154	4	226	165	225	166	**226**	**165**
458.sjeng	4	**562**	**86.0**	562	86.0	561	86.4	4	563	86.0	**562**	**86.0**	562	86.0
462.libquantum	4	111	747	**111**	**747**	111	745	4	**105**	**792**	104	796	105	788
464.h264ref	4	538	164	**538**	**165**	537	165	4	526	168	**527**	**168**	527	168
471.omnetpp	4	362	69.2	362	69.2	**362**	**69.2**	4	**334**	**74.8**	334	74.8	334	74.8
473.astar	4	435	64.4	435	64.8	**435**	**64.8**	4	403	69.6	**402**	**69.6**	402	69.6
483.xalancbmk	4	275	100	**275**	**100**	275	100	4	275	100	**275**	**100**	275	100

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
 The start command with the /affinity switch was used to bind processes to cores
```

General Notes

```
Tested systems can be used with Shin-G ATX case,
PC Power and Cooling 1200W power supply
```

Base Compiler Invocation

C benchmarks:

```
icl -Qvc9 -Qstd=c99
```

C++ benchmarks:

```
icl -Qvc9
```

Base Portability Flags

403.gcc: `-DSPEC_CPU_WIN32`
464.h264ref: `-DWIN32 -DSPEC_CPU_NO_INTTYPES`
483.xalancbmk: `-Qoption,cpp,--no_wchar_t_keyword`

Base Optimization Flags

C benchmarks:
```
-QxAVX -Qipo -O3 -Qprec-div- -Qopt-prefetch /F512000000
```

C++ benchmarks:
```
-QxAVX -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qcxx-features
/F512000000 shlW32M.lib            -link /FORCE:MULTIPLE
```

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
```
icl -Qvc9 -Qstd=c99
```

456.hmmer: `C:/Program Files (x86)/Intel/ComposerXE-2011/bin/intel64/icl.exe`

458.sjeng: `C:/Program Files (x86)/Intel/ComposerXE-2011/bin/intel64/icl.exe`

462.libquantum: `C:/Program Files (x86)/Intel/ComposerXE-2011/bin/intel64/icl.exe -Qstd=c99`

C++ benchmarks (except as noted below):
```
icl -Qvc9
```

473.astar: `C:/Program Files (x86)/Intel/ComposerXE-2011/bin/intel64/icl.exe`

Peak Portability Flags

403.gcc: `-DSPEC_CPU_WIN32`
456.hmmer: `-DSPEC_CPU_P64`
458.sjeng: `-DSPEC_CPU_P64`
462.libquantum: `-DSPEC_CPU_P64`
464.h264ref: `-DWIN32 -DSPEC_CPU_NO_INTTYPES`
473.astar: `-DSPEC_CPU_P64`
483.xalancbmk: `-Qoption,cpp,--no_wchar_t_keyword`

Peak Optimization Flags

C benchmarks:

400.perlbench: -QxAVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch /F512000000 shlW32M.lib -link /FORCE:MULTIPLE

401.bzip2: -QxAVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qansi-alias /F512000000

403.gcc: -QxAVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qopt-prefetch /F512000000

429.mcf: -QxAVX -Qipo -O3 -Qprec-div- -Qopt-prefetch /F512000000

445.gobmk: -QxAVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O2 -Qprec-div- -Qansi-alias /F512000000

456.hmmer: -Qauto-ilp32 -QxAVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qopt-prefetch /F512000000

458.sjeng: -Qauto-ilp32 -QxAVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll4 /F512000000

462.libquantum: -Qauto-ilp32 -QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch /F512000000

464.h264ref: -QxAVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll2 -Qansi-alias /F512000000

C++ benchmarks:

471.omnetpp: -QxAVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-ra-region-strategy=block /F512000000 shlW32M.lib -link /FORCE:MULTIPLE

473.astar: -Qauto-ilp32 -QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch /F512000000 shlW64M.lib -link /FORCE:MULTIPLE

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

Continued on next page

Peak Other Flags (Continued)

403.gcc: `-Dalloca=_alloca`

456.hmmer: `-link -LIBPATH:C:/Program Files (x86)/Intel/ComposerXE-2011/compiler/lib/intel64`
`-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib/AMD64`
`-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib`
`-link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64`

458.sjeng: `-link -LIBPATH:C:/Program Files (x86)/Intel/ComposerXE-2011/compiler/lib/intel64`
`-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib/AMD64`
`-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib`
`-link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64`

462.libquantum: `-link -LIBPATH:C:/Program Files (x86)/Intel/ComposerXE-2011/compiler/lib/intel64`
`-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib/AMD64`
`-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib`
`-link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64`

C++ benchmarks:

473.astar: `-link -LIBPATH:C:/Program Files (x86)/Intel/ComposerXE-2011/compiler/lib/intel64`
`-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib/AMD64`
`-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib`
`-link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic12-win32-revB.20110808.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/Intel-ic12-win32-revB.20110808.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Thu Jul 24 00:01:37 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 2 August 2011.