



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint®_rate2006 = 55.5

Intel DH61WW motherboard (Intel Pentium G630)

SPECint_rate_base2006 = 51.9

CPU2006 license: 13


Test date: Oct-2011

Test sponsor: Intel Corporation

Hardware Availability: Sep-2011

Tested by: Intel Corporation

Software Availability: Apr-2011

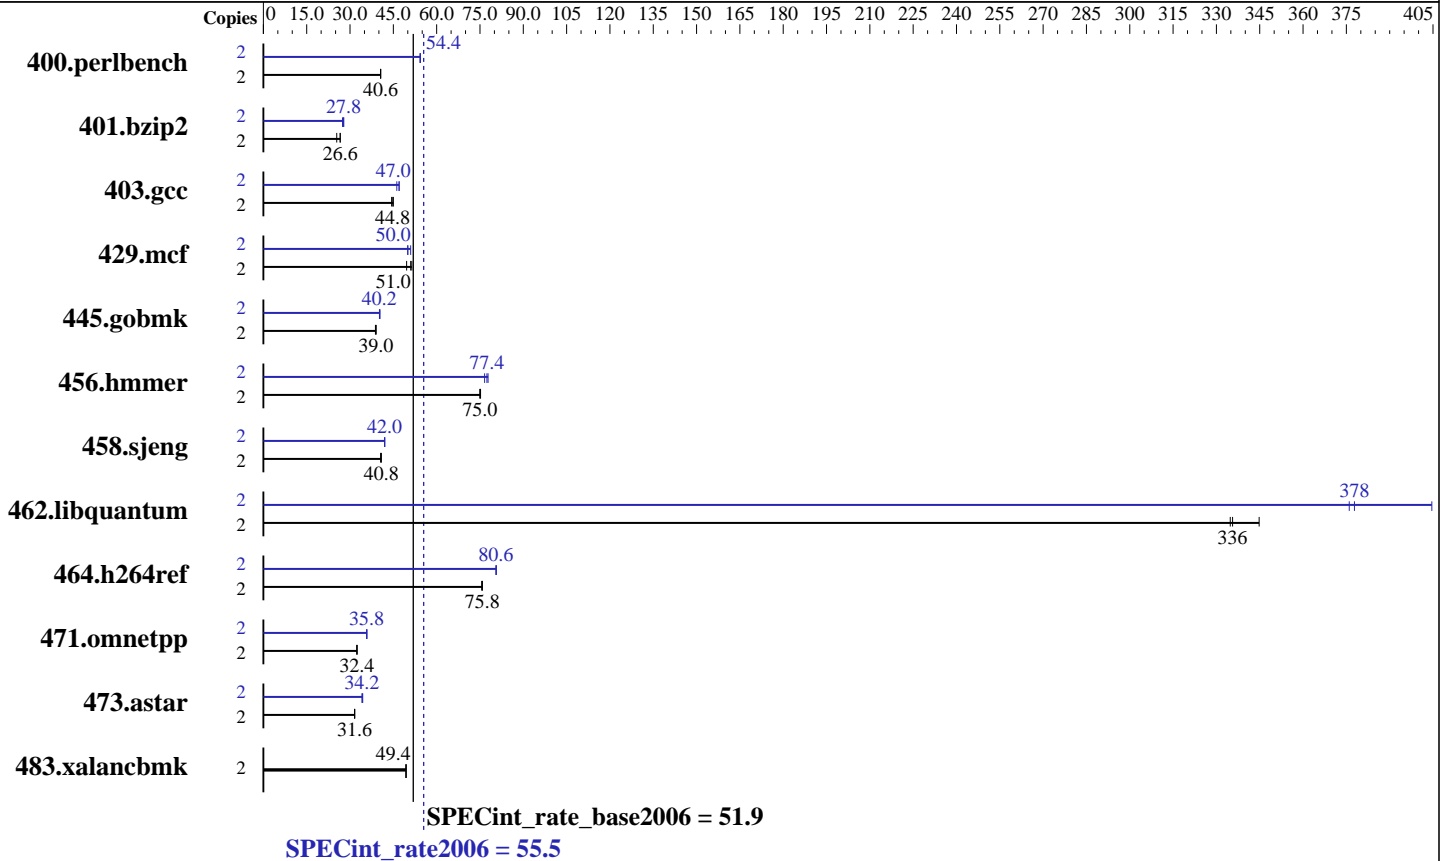

Hardware

CPU Name: Intel Pentium G630
 CPU Characteristics:
 CPU MHz: 2700
 FPU: Integrated
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 3 MB I+D on chip per chip
 Other Cache: None
 Memory: 2 GB (2 x 1 GB 2Rx4 PC3-10600U-9, running at 1066 MHz)
 Disk Subsystem: 1 TB Seagate SATA, 7200 RPM
 Other Hardware: None

Software

Operating System: Windows 7 Ultimate (64-bit)
 Compiler: C++: Version 12.0.3.176 of Intel C++ Studio XE for Windows;
 Libraries: Version 15.00.30729.01 of Microsoft Visual Studio 2008 Professional SP1
 Auto Parallel: No
 File System: NTFS
 System State: Default
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: SmartHeap Library Version 9.01 from <http://www.microquill.com/>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint_rate2006 = 55.5

Intel DH61WW motherboard (Intel Pentium G630)

SPECint_rate_base2006 = 51.9

CPU2006 license: 13

Test date: Oct-2011

Test sponsor: Intel Corporation

Hardware Availability: Sep-2011

Tested by: Intel Corporation

Software Availability: Apr-2011

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	2	482	40.6	481	40.6	481	40.6	2	359	54.4	359	54.4	360	54.2
401.bzip2	2	758	25.4	728	26.6	728	26.6	2	696	27.8	696	27.8	706	27.4
403.gcc	2	359	45.0	363	44.4	359	44.8	2	343	47.0	343	47.0	348	46.2
429.mcf	2	368	49.6	358	51.0	354	51.4	2	358	51.0	365	50.0	365	50.0
445.gobmk	2	539	38.8	539	39.0	539	39.0	2	521	40.2	521	40.2	520	40.4
456.hammer	2	248	75.2	249	75.0	249	75.0	2	240	77.8	241	77.4	244	76.6
458.sjeng	2	594	40.8	594	40.8	595	40.6	2	577	42.0	577	42.0	577	42.0
462.libquantum	2	124	336	120	345	124	335	2	110	376	102	405	110	378
464.h264ref	2	585	75.6	585	75.8	585	75.8	2	550	80.6	549	80.6	549	80.6
471.omnetpp	2	386	32.4	386	32.4	387	32.4	2	349	35.8	349	35.8	349	35.8
473.astar	2	446	31.6	445	31.6	445	31.6	2	410	34.2	409	34.4	409	34.2
483.xalancbmk	2	279	49.4	279	49.4	279	49.4	2	279	49.4	279	49.4	279	49.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

The start command with the /affinity switch was used to bind processes to cores

Component Notes

Tested systems can be used with Shin-G ATX case,
PC Power and Cooling 1200W power supply

General Notes

Binaries compiled on a system with 1x Intel Core i7-860 CPU
+ 8GB memory using Windows 7 Enterprise 64-bit

Base Compiler Invocation

C benchmarks:

```
icl -Qvc9 -Qstd=c99
```

C++ benchmarks:

```
icl -Qvc9
```



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint_rate2006 = 55.5

Intel DH61WW motherboard (Intel Pentium G630)

SPECint_rate_base2006 = 51.9

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Oct-2011

Hardware Availability: Sep-2011

Software Availability: Apr-2011

Base Portability Flags

403.gcc: -DSPEC_CPU_WIN32
464.h264ref: -DWIN32 -DSPEC_CPU_NO_INTTYPES
483.xalancbmk: -Qoption,cpp,--no_wchar_t_keyword

Base Optimization Flags

C benchmarks:

-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch /F512000000

C++ benchmarks:

-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qcxx-features
/F512000000 shlw32M.lib -link /FORCE:MULTIPLE

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icl -Qvc9 -Qstd=c99

456.hmmr: C:/Program Files (x86)/Intel/ComposerXE-2011/bin/intel64/icl.exe

458.sjeng: C:/Program Files (x86)/Intel/ComposerXE-2011/bin/intel64/icl.exe

462.libquantum: C:/Program Files (x86)/Intel/ComposerXE-2011/bin/intel64/icl.exe
-Qstd=c99

C++ benchmarks (except as noted below):

icl -Qvc9

473.astar: C:/Program Files (x86)/Intel/ComposerXE-2011/bin/intel64/icl.exe

Peak Portability Flags

403.gcc: -DSPEC_CPU_WIN32
456.hmmr: -DSPEC_CPU_P64
458.sjeng: -DSPEC_CPU_P64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint_rate2006 = 55.5

Intel DH61WW motherboard (Intel Pentium G630)

SPECint_rate_base2006 = 51.9

CPU2006 license: 13

Test date: Oct-2011

Test sponsor: Intel Corporation

Hardware Availability: Sep-2011

Tested by: Intel Corporation

Software Availability: Apr-2011

Peak Portability Flags (Continued)

462.libquantum: -DSPEC_CPU_P64
 464.h264ref: -DWIN32 -DSPEC_CPU_NO_INTTYPES
 473.astar: -DSPEC_CPU_P64
 483.xalancbmk: -Qoption,cpp,--no_wchar_t_keyword

Peak Optimization Flags

C benchmarks:

400.perlbench: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
 -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch
 /F512000000 shlw32M.lib -link /FORCE:MULTIPLE

401.bzip2: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
 -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qansi-alias
 /F512000000

403.gcc: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
 -Qipo -O3 -Qprec-div- -Qopt-prefetch /F512000000

429.mcf: -QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch
 /F512000000

445.gobmk: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
 -Qipo -O2 -Qprec-div- -Qansi-alias /F512000000

456.hmmer: -Qauto-ilp32 -QxSSE4.2(pass 2) -Qprof_gen(pass 1)
 -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qopt-prefetch
 /F512000000

458.sjeng: -Qauto-ilp32 -QxSSE4.2(pass 2) -Qprof_gen(pass 1)
 -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll4
 /F512000000

462.libquantum: -Qauto-ilp32 -QxSSE4.2 -Qipo -O3 -Qprec-div-
 -Qopt-prefetch /F512000000

464.h264ref: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
 -Qipo -O3 -Qprec-div- -Qunroll2 -Qansi-alias /F512000000

C++ benchmarks:

471.omnetpp: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
 -Qipo -O3 -Qprec-div- -Qansi-alias
 -Qopt-ra-region-strategy=block /F512000000 shlw32M.lib
 -link /FORCE:MULTIPLE

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint_rate2006 = 55.5

Intel DH61WW motherboard (Intel Pentium G630)

SPECint_rate_base2006 = 51.9

CPU2006 license: 13

Test date: Oct-2011

Test sponsor: Intel Corporation

Hardware Availability: Sep-2011

Tested by: Intel Corporation

Software Availability: Apr-2011

Peak Optimization Flags (Continued)

```
473.astar: -Qauto-ilp32 -QxSSE4.2 -Qipo -O3 -Qprec-div-
-Qopt-prefetch /F512000000 shlw64M.lib
-link /FORCE:MULTIPLE
```

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

```
456.hmmer: -link -LIBPATH:C:/Program Files (x86)/Intel/ComposerXE-2011/compiler/lib/intel64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib/AMD64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib
-link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64
```

```
458.sjeng: -link -LIBPATH:C:/Program Files (x86)/Intel/ComposerXE-2011/compiler/lib/intel64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib/AMD64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib
-link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64
```

```
462.libquantum: -link -LIBPATH:C:/Program Files (x86)/Intel/ComposerXE-2011/compiler/lib/intel64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib/AMD64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib
-link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64
```

C++ benchmarks:

```
473.astar: -link -LIBPATH:C:/Program Files (x86)/Intel/ComposerXE-2011/compiler/lib/intel64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib/AMD64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib
-link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12-win32-revC.20111012.html>

<http://www.spec.org/cpu2006/flags/Intel-Windows-Platform-Settings-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12-win32-revC.20111012.xml>

<http://www.spec.org/cpu2006/flags/Intel-Windows-Platform-Settings-revC.xml>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint_rate2006 = 55.5

Intel DH61WW motherboard (Intel Pentium G630)

SPECint_rate_base2006 = 51.9

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Oct-2011

Hardware Availability: Sep-2011

Software Availability: Apr-2011

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Thu Jul 24 00:52:54 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 8 November 2011.