SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS F2A85-M PRO motherboard (AMD A10-6800K APU with Radeon HD Graphics)

SPECint®_rate2006 = 74.0

SPECint_rate_base2006 = 70.7

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Sep-2013
Hardware Availability: Jun-2013
Software Availability: Apr-2013

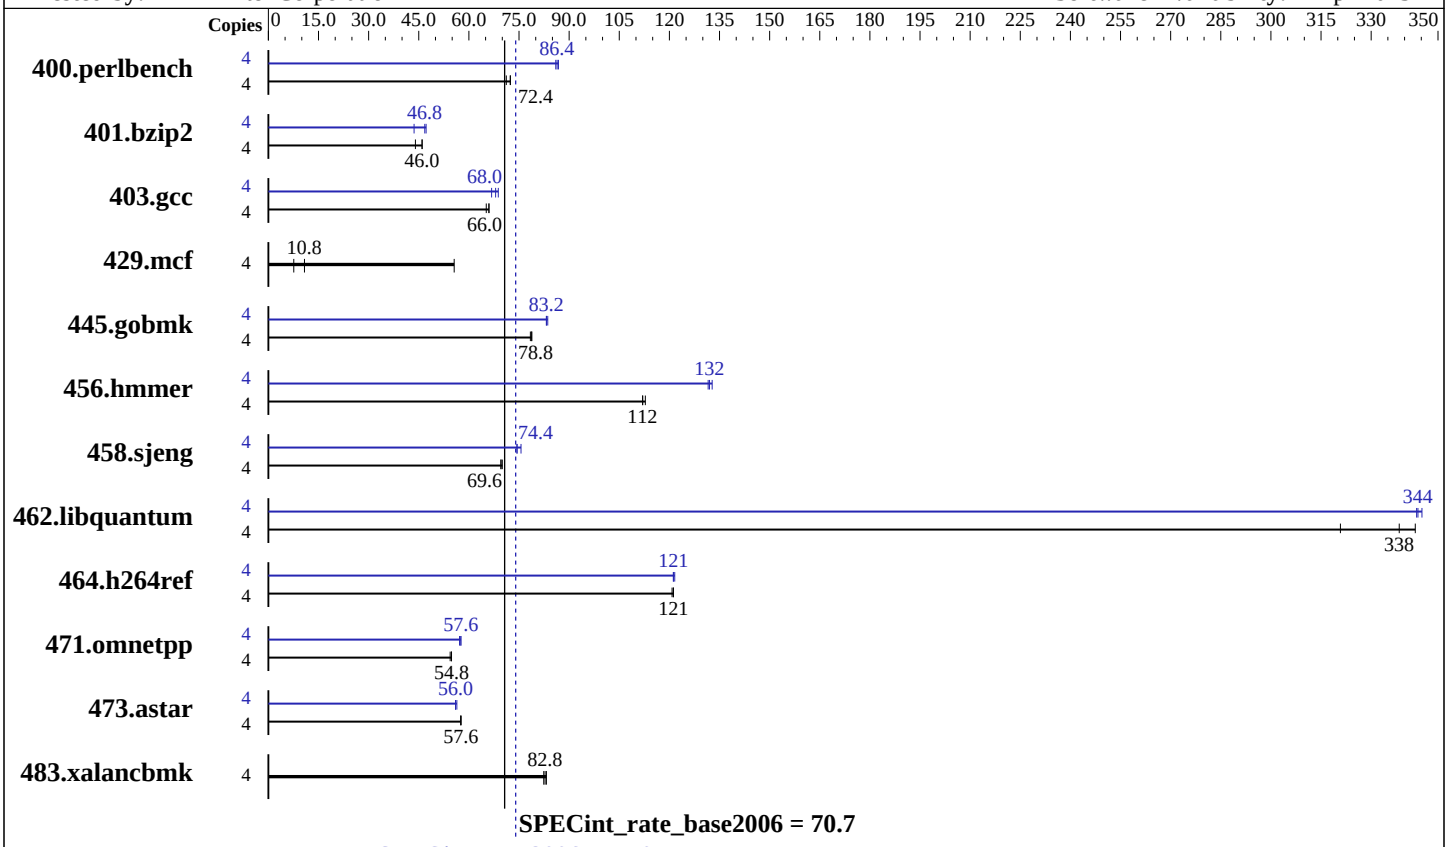

Hardware

CPU Name:	AMD A10-6800K
CPU Characteristics:	AMD Turbo CORE technology up to 4.40 GHz
CPU MHz:	4100
FPU:	Integrated
CPU(s) enabled:	4 cores, 1 chip, 4 cores/chip
CPU(s) orderable:	1 chip
Primary Cache:	128 KB I on chip per chip, 64 KB I shared / 2 cores; 16 KB D on chip per core
Secondary Cache:	4 MB I+D on chip per chip, 2 MB shared / 2 cores
L3 Cache:	None
Other Cache:	None
Memory:	4 GB (2 x 2 GB 1Rx8 PC3-12800U-11)
Disk Subsystem:	250 GB Seagate SATA HDD, 7200 RPM
Other Hardware:	None

Software

Operating System:	Microsoft Windows 7 Ultimate 6.1.7601 Service Pack 1 Build 7601
Compiler:	C/C++: Version 13.1.1.171 of Intel C++ Studio XE for Windows; Libraries: Version 16.00.30319.01 of Microsoft Visual Studio 2010 Professional SP1
Auto Parallel:	No
File System:	NTFS
System State:	Default
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	SmartHeap Library Version 10.0 from http://www.microquill.com/

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS F2A85-M PRO motherboard (AMD A10-6800K APU with Radeon HD Graphics)

SPECint_rate2006 = 74.0

SPECint_rate_base2006 = 70.7

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Sep-2013
Hardware Availability: Jun-2013
Software Availability: Apr-2013

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	**541**	**72.4**	550	71.2	540	72.4	4	451	86.8	454	86.0	**452**	**86.4**
401.bzip2	4	878	44.0	838	46.0	**841**	**46.0**	4	818	47.2	882	43.6	**827**	**46.8**
403.gcc	4	487	66.0	**487**	**66.0**	495	65.2	4	468	68.8	**473**	**68.0**	481	66.8
429.mcf	4	4842	7.60	**3398**	**10.8**	655	55.6	4	4842	7.60	**3398**	**10.8**	655	55.6
445.gobmk	4	**534**	**78.8**	534	78.4	532	78.8	4	504	83.2	503	83.6	**504**	**83.2**
456.hmmer	4	331	113	**333**	**112**	333	112	4	**283**	**132**	281	133	283	132
458.sjeng	4	**694**	**69.6**	695	69.6	690	70.0	4	**649**	**74.4**	639	75.6	649	74.4
462.libquantum	4	**245**	**338**	241	343	258	321	4	240	345	**241**	**344**	241	344
464.h264ref	4	730	121	732	121	**731**	**121**	4	**729**	**121**	728	122	730	121
471.omnetpp	4	458	54.4	457	54.8	**458**	**54.8**	4	436	57.2	434	57.6	**435**	**57.6**
473.astar	4	487	57.6	487	57.6	**487**	**57.6**	4	**500**	**56.0**	501	56.0	499	56.4
483.xalancbmk	4	335	82.4	**333**	**82.8**	333	83.2	4	335	82.4	**333**	**82.8**	333	83.2

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

```
To compile these binaries, the Intel Compiler 13.1 was set up to
generate 32-bit binaries with the command:
"ipsxe-comp-vars.bat ia32 vs2010" (shortcut provided in the Intel(r)
Parallel Studio XE 2013 program folder)
```

Submit Notes

```
Processes were bound to specific processors using the start command with the /affinity switch.
The config file option 'submit' was used to generate the affinity mask for each process.
```

Platform Notes

```
Sysinfo program C:\SPEC13.1/Docs/sysinfo
$Rev: 6775 $ $Date:: 2011-08-16 #$ \8787f7622badcf24e01c368b1db4377c
running on Clt14DAE908A2BC Thu Sep 19 11:43:23 2013

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

Trying 'systeminfo'
OS Name       : Microsoft Windows 7 Ultimate
OS Version    : 6.1.7601 Service Pack 1 Build 7601
System Manufacturer: System manufacturer
System Model  : System Product Name
Processor(s)  : 1 Processor(s) Installed.
```

Continued on next page

Platform Notes (Continued)

```
     [01]: AMD64 Family 21 Model 19 Stepping 1 AuthenticAMD ~4100 Mhz
BIOS Version  : American Megatrends Inc. 6105, 5/8/2013
Total Physical Memory: 3,111 MB

Trying 'wmic cpu get /value'
DeviceID      : CPU0
L2CacheSize   : 4096
L3CacheSize   : 0
MaxClockSpeed : 4100
Name          : AMD A10-6800K APU with Radeon(tm) HD Graphics
NumberOfCores : 2
NumberOfLogicalProcessors: 4

(End of data from sysinfo program)
```

Component Notes

```
Tested systems can be used with Shin-G ATX case,
PC Power and Cooling 1200W power supply
Micron MT8JTF25664AZ-1G6 Series Memory DIMMs
```

General Notes

```
Binaries compiled on a system with 1x Intel Core i7-860 CPU
+ 8GB memory using Windows 7 Enterprise 64-bit
```

Base Compiler Invocation

C benchmarks:
```
icl -Qvc10 -Qstd=c99
```

C++ benchmarks:
```
icl -Qvc10
```

Base Portability Flags

403.gcc: `-DSPEC_CPU_WIN32`
464.h264ref: `-DWIN32 -DSPEC_CPU_NO_INTTYPES`
483.xalancbmk: `-Qoption,cpp,--no_wchar_t_keyword`

Base Optimization Flags

C benchmarks:
```
/arch:AVX -Qipo -O3 -Qprec-div- -Qopt-prefetch /F512000000
```

Continued on next page

Base Optimization Flags (Continued)

C++ benchmarks:
/arch:AVX -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qcxx-features
/F512000000 shlW32M.lib -link /FORCE:MULTIPLE

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icl -Qvc10 -Qstd=c99

456.hmmer: C:\Program Files (x86)\Intel\Composer XE 2013.171/bin/intel64/icl.exe

458.sjeng: C:\Program Files (x86)\Intel\Composer XE 2013.171/bin/intel64/icl.exe

462.libquantum: C:\Program Files (x86)\Intel\Composer XE 2013.171/bin/intel64/icl.exe -Qstd=c99

C++ benchmarks (except as noted below):
icl -Qvc10

473.astar: C:\Program Files (x86)\Intel\Composer XE 2013.171/bin/intel64/icl.exe

Peak Portability Flags

403.gcc: -DSPEC_CPU_WIN32
456.hmmer: -DSPEC_CPU_P64
458.sjeng: -DSPEC_CPU_P64
462.libquantum: -DSPEC_CPU_P64
464.h264ref: -DWIN32 -DSPEC_CPU_NO_INTTYPES
473.astar: -DSPEC_CPU_P64
483.xalancbmk: -Qoption,cpp,--no_wchar_t_keyword

Peak Optimization Flags

C benchmarks:

Continued on next page

Peak Optimization Flags (Continued)

400.perlbench: /arch:AVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch /F512000000 shlW32M.lib -link /FORCE:MULTIPLE

401.bzip2: /arch:AVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qansi-alias /F512000000

403.gcc: /arch:AVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qopt-prefetch /F512000000

429.mcf: basepeak = yes

445.gobmk: /arch:AVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O2 -Qprec-div- -Qansi-alias /F512000000

456.hmmer: -Qauto-ilp32 /arch:AVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qopt-prefetch /F512000000

458.sjeng: -Qauto-ilp32 /arch:AVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll4 /F512000000

462.libquantum: -Qauto-ilp32 /arch:AVX -Qipo -O3 -Qprec-div- -Qopt-prefetch /F512000000

464.h264ref: /arch:AVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll2 -Qansi-alias /F512000000

C++ benchmarks:

471.omnetpp: /arch:AVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-ra-region-strategy=block /F512000000 shlW32M.lib -link /FORCE:MULTIPLE

473.astar: -Qauto-ilp32 /arch:AVX -Qipo -O3 -Qprec-div- -Qopt-prefetch /F512000000 shlW64M.lib -link /FORCE:MULTIPLE

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

Continued on next page

Peak Other Flags (Continued)

403.gcc: `-Dalloca=_alloca`

456.hmmer: `-link -LIBPATH:C:\Program Files (x86)\Intel\Composer XE 2013.171/compiler/lib/intel64`
`-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 10.0/VC/lib/AMD6`
`-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 10.0/VC/lib`
`-link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64`

458.sjeng: `-link -LIBPATH:C:\Program Files (x86)\Intel\Composer XE 2013.171/compiler/lib/intel64`
`-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 10.0/VC/lib/AMD6`
`-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 10.0/VC/lib`
`-link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64`

462.libquantum: `-link -LIBPATH:C:\Program Files (x86)\Intel\Composer XE 2013.171/compiler/lib/intel64`
`-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 10.0/VC/lib/AMD6`
`-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 10.0/VC/lib`
`-link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64`

C++ benchmarks:

473.astar: `-link -LIBPATH:C:\Program Files (x86)\Intel\Composer XE 2013.171/compiler/lib/intel64`
`-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 10.0/VC/lib/AMD6`
`-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 10.0/VC/lib`
`-link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic13.1-official-windows.20130924.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/Intel-ic13.1-official-windows.20130924.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Aug 12 15:06:22 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 15 July 2014.