SPEC® CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Gigabyte Technology Co., Ltd.

(Test Sponsor: Intel Corporation)

GigaByte GA-X99-Designare EX motherboard (Intel Core i7-6950X)

SPECint®_rate2006 = 577

SPECint_rate_base2006 = 557

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Jun-2016
Hardware Availability: May-2016
Software Availability: Nov-2015

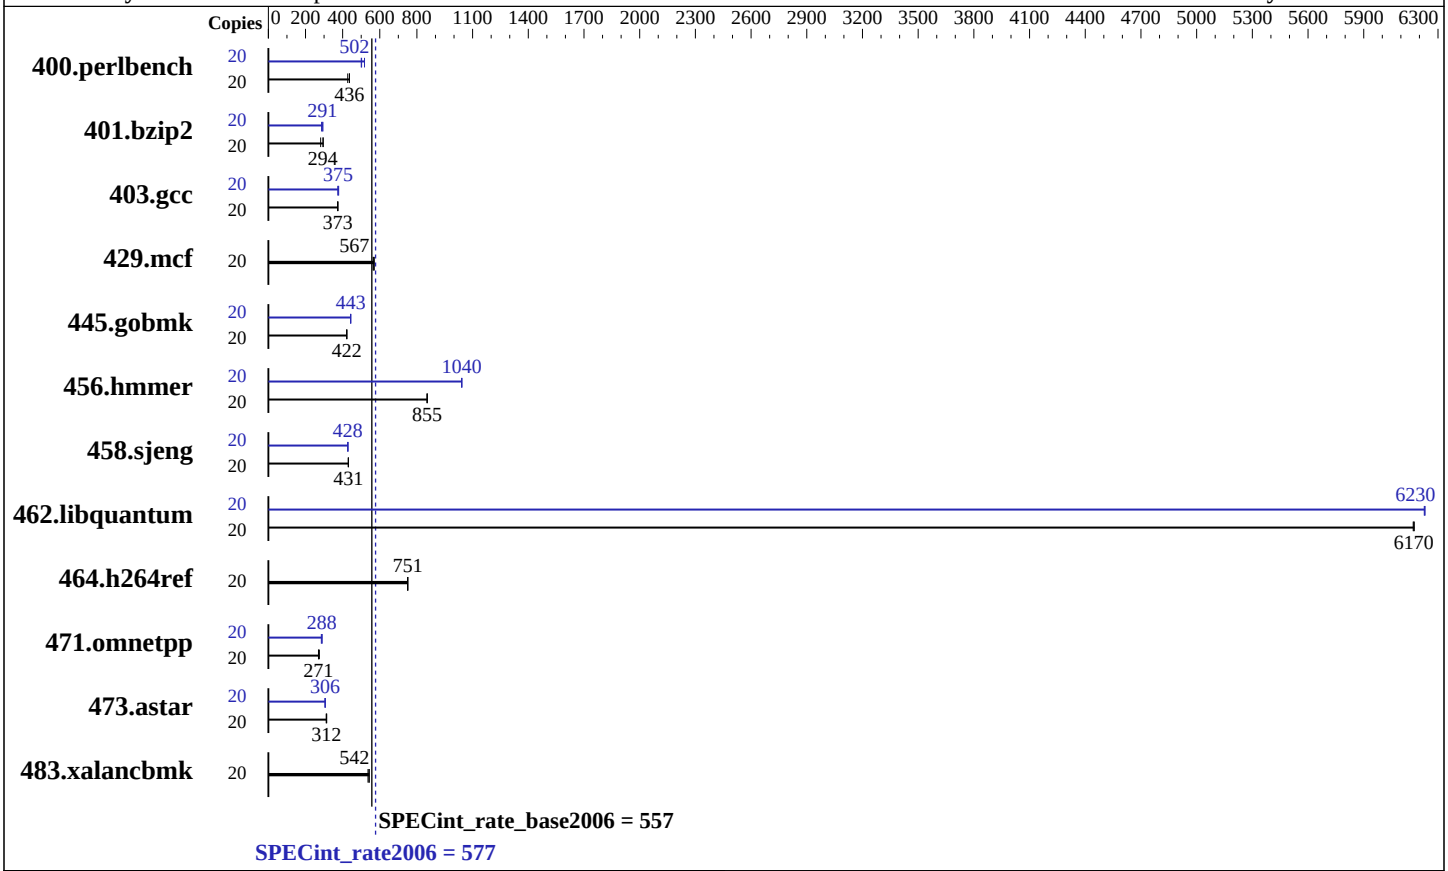

Hardware

CPU Name:	Intel Core i7-6950X
CPU Characteristics:	Intel Turbo Boost Technology up to 3.50 GHz
CPU MHz:	3000
FPU:	Integrated
CPU(s) enabled:	10 cores, 1 chip, 10 cores/chip, 2 threads/core
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	25 MB I+D on chip per chip
Other Cache:	None
Memory:	32 GB (4 x 8 GB 2Rx4 PC4-2133R-U)
Disk Subsystem:	1 TB Seagate SATA HDD, 7200 RPM
Other Hardware:	None

Software

Operating System:	Microsoft Windows 10 Pro 10.0.10586 N/A Build 10586
Compiler:	C/C++: Version 16.0.0.110 of Intel C++ Studio XE for Windows; Libraries: Version 18.00.30723 of Microsoft Visual Studio 2013
Auto Parallel:	No
File System:	NTFS
System State:	Default
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	SmartHeap Library Version 11.0 from http://www.microquill.com/

SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Gigabyte Technology Co., Ltd.

(Test Sponsor: Intel Corporation)

GigaByte GA-X99-Designare EX motherboard (Intel Core i7-6950X)

SPECint_rate2006 = 577

SPECint_rate_base2006 = 557

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Jun-2016
Hardware Availability: May-2016
Software Availability: Nov-2015

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	20	**448**	**436**	457	427	447	437	20	391	500	377	518	**389**	**502**
401.bzip2	20	685	282	**657**	**294**	653	296	20	674	286	657	294	**664**	**291**
403.gcc	20	**431**	**373**	432	373	429	375	20	430	374	**429**	**375**	425	379
429.mcf	20	323	564	**322**	**567**	320	570	20	323	564	**322**	**567**	320	570
445.gobmk	20	**497**	**422**	497	423	497	422	20	**473**	**443**	474	443	473	444
456.hmmer	20	218	855	**218**	**855**	218	856	20	**179**	**1040**	179	1040	179	1040
458.sjeng	20	562	430	561	431	**562**	**431**	20	566	427	564	429	**565**	**428**
462.libquantum	20	67.1	6170	**67.2**	**6170**	67.2	6170	20	**66.5**	**6230**	66.5	6230	66.6	6230
464.h264ref	20	590	750	589	751	**590**	**751**	20	590	750	589	751	**590**	**751**
471.omnetpp	20	463	270	455	275	**462**	**271**	20	432	289	438	285	**434**	**288**
473.astar	20	447	314	450	312	**449**	**312**	20	458	306	460	305	**459**	**306**
483.xalancbmk	20	257	537	**255**	**542**	254	543	20	257	537	**255**	**542**	254	543

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

```
To compile these binaries, the Intel Compiler 16.0 was set up to
generate 32-bit binaries with the command:
"ipsxe-comp-vars.bat ia32 vs2010" (shortcut provided in the Intel(r)
Parallel Studio XE 2016 program folder)
```

Platform Notes

```
Sysinfo program C:\SPEC16.0/Docs/sysinfo
$Rev: 6775 $ $Date:: 2011-08-16 #$ \8787f7622badcf24e01c368b1db4377c
running on Clt1C1B0D05C2E5 Sat Jun 18 15:40:52 2016

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

Trying 'systeminfo'
OS Name        : Microsoft Windows 10 Pro
OS Version     : 10.0.10586 N/A Build 10586
System Manufacturer: Gigabyte Technology Co., Ltd.
System Model   : Default string
Processor(s)   : 1 Processor(s) Installed.
     [01]: Intel64 Family 6 Model 79 Stepping 1 GenuineIntel ~3001 Mhz
BIOS Version   : American Megatrends Inc. F2, 5/22/2016
Total Physical Memory: 32,606 MB

Trying 'wmic cpu get /value'
DeviceID       : CPU0
```

Continued on next page

Platform Notes (Continued)

```
L2CacheSize   : 2560
L3CacheSize   : 25600
MaxClockSpeed : 3001
Name          : Intel(R) Core(TM) i7-6950X CPU @ 3.00GHz
NumberOfCores : 10
NumberOfLogicalProcessors: 20

(End of data from sysinfo program)
```

Component Notes

```
Tested systems can be used with Shin-G ATX case,
PC Power and Cooling 1200W power supply
```

General Notes

```
Binaries compiled on a system with 1x Intel Xeon E5-2699 v3 CPU
+ 64GB memory using Windows 8.1 Enterprise 64-bit
```

Base Compiler Invocation

C benchmarks:
```
icl -Qvc12 -Qstd=c99
```

C++ benchmarks:
```
icl -Qvc12
```

Base Portability Flags

403.gcc: `-DSPEC_CPU_WIN32`
464.h264ref: `-DWIN32`
483.xalancbmk: `-Qoption,cpp,--no_wchar_t_keyword`

Base Optimization Flags

C benchmarks:
```
-QxCORE-AVX2 -Qipo -O3 -Qprec-div- -Qopt-prefetch /F256000000
```

C++ benchmarks:
```
-QxCORE-AVX2 -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qcxx-features
/F256000000 shlW32M.lib             -link /FORCE:MULTIPLE
```

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icl -Qvc12 -Qstd=c99`

456.hmmer: `C:\Program Files (x86)\IntelSWTools\parallel_studio_xe_2016.0.041ompilers_and_libraries_2016\windows/bin/intel64/icl.exe`

458.sjeng: `C:\Program Files (x86)\IntelSWTools\parallel_studio_xe_2016.0.041ompilers_and_libraries_2016\windows/bin/intel64/icl.exe`

462.libquantum: `C:\Program Files (x86)\IntelSWTools\parallel_studio_xe_2016.0.041ompilers_and_libraries_2016\windows/bin/intel64/icl.exe -Qstd=c99`

C++ benchmarks (except as noted below):
`icl -Qvc12`

473.astar: `C:\Program Files (x86)\IntelSWTools\parallel_studio_xe_2016.0.041ompilers_and_libraries_2016\windows/bin/intel64/icl.exe`

Peak Portability Flags

403.gcc: `-DSPEC_CPU_WIN32`
456.hmmer: `-DSPEC_CPU_P64`
458.sjeng: `-DSPEC_CPU_P64`
462.libquantum: `-DSPEC_CPU_P64`
464.h264ref: `-DWIN32`
473.astar: `-DSPEC_CPU_P64`
483.xalancbmk: `-Qoption,cpp,--no_wchar_t_keyword`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-QxCORE-AVX2`(pass 2) `-Qprof_gen`(pass 1) `-Qprof_use`(pass 2) `-Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch /F256000000 shlW32M.lib -link /FORCE:MULTIPLE`

401.bzip2: `-QxCORE-AVX2`(pass 2) `-Qprof_gen`(pass 1) `-Qprof_use`(pass 2) `-Qipo -O3 -Qprec-div- -Qopt-prefetch -Qansi-alias /F256000000`

Continued on next page

Peak Optimization Flags (Continued)

403.gcc: -QxCORE-AVX2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qopt-prefetch /F256000000

429.mcf: basepeak = yes

445.gobmk: -QxCORE-AVX2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O2 -Qprec-div- -Qansi-alias /F256000000

456.hmmer: -Qauto-ilp32 -QxCORE-AVX2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo(1) -O3(1) -Qprec-div-(1) -Qopt-prefetch(1) /F256000000

458.sjeng: -Qauto-ilp32 -QxCORE-AVX2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo(1) -O3(1) -Qprec-div-(1) -Qunroll4(1) /F256000000

462.libquantum: -Qauto-ilp32 -QxCORE-AVX2 -Qipo -O3 -Qprec-div- -Qopt-prefetch /F256000000

464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: -QxCORE-AVX2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-ra-region-strategy=block /F256000000 shlW32M.lib -link /FORCE:MULTIPLE

473.astar: -Qauto-ilp32 -QxCORE-AVX2 -Qipo -O3 -Qprec-div- -Qopt-prefetch /F256000000 shlW64M.lib

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

456.hmmer: -link -LIBPATH:C:\Program Files (x86)\IntelSWTools\parallel_studio_xe_2016.0.041ompilers_and_libraries_2016\windows/compiler/lib/intel64 -link -LIBPATH:C:\Program Files (x86)\Microsoft SDKs\Windows77.1A\Libd

-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 12.0/VC/lib/AMD6

458.sjeng: -link -LIBPATH:C:\Program Files (x86)\IntelSWTools\parallel_studio_xe_2016.0.041ompilers_and_libraries_2016\windows/compiler/lib/intel64 -link -LIBPATH:C:\Program Files (x86)\Microsoft SDKs\Windows77.1A\Libd

-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 12.0/VC/lib/AMD6

462.libquantum: -link -LIBPATH:C:\Program Files (x86)\IntelSWTools\parallel_studio_xe_2016.0.041ompilers_and_libraries_2016\windows/compiler/lib/intel64 -link -LIBPATH:C:\Program Files (x86)\Microsoft SDKs\Windows77.1A\Libd

-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 12.0/VC/lib/AMD6

Continued on next page

Peak Other Flags (Continued)

C++ benchmarks:

```
473.astar: -link /FORCE:MULTIPLE -link -LIBPATH:C:\Program Files (x86)\IntelSWTools\parallel_studio_xe_2016.0.041compilers_and_libraries_2016\windows/compiler/lib/intel64 -link -LIBPATH:C:\Program Files (x86)\Microsoft SDKs\Windows77.1A\Lib
        -link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 12.0/VC/lib/AMD6
```

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-windows.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-windows.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Oct 4 14:49:39 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 4 October 2016.