SPEC® CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10
(3.10 GHz, AMD EPYC 7371)

SPECrate2017_int_base = 104

SPECrate2017_int_peak = 108

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2019
Hardware Availability: Apr-2019
Software Availability: Dec-2018

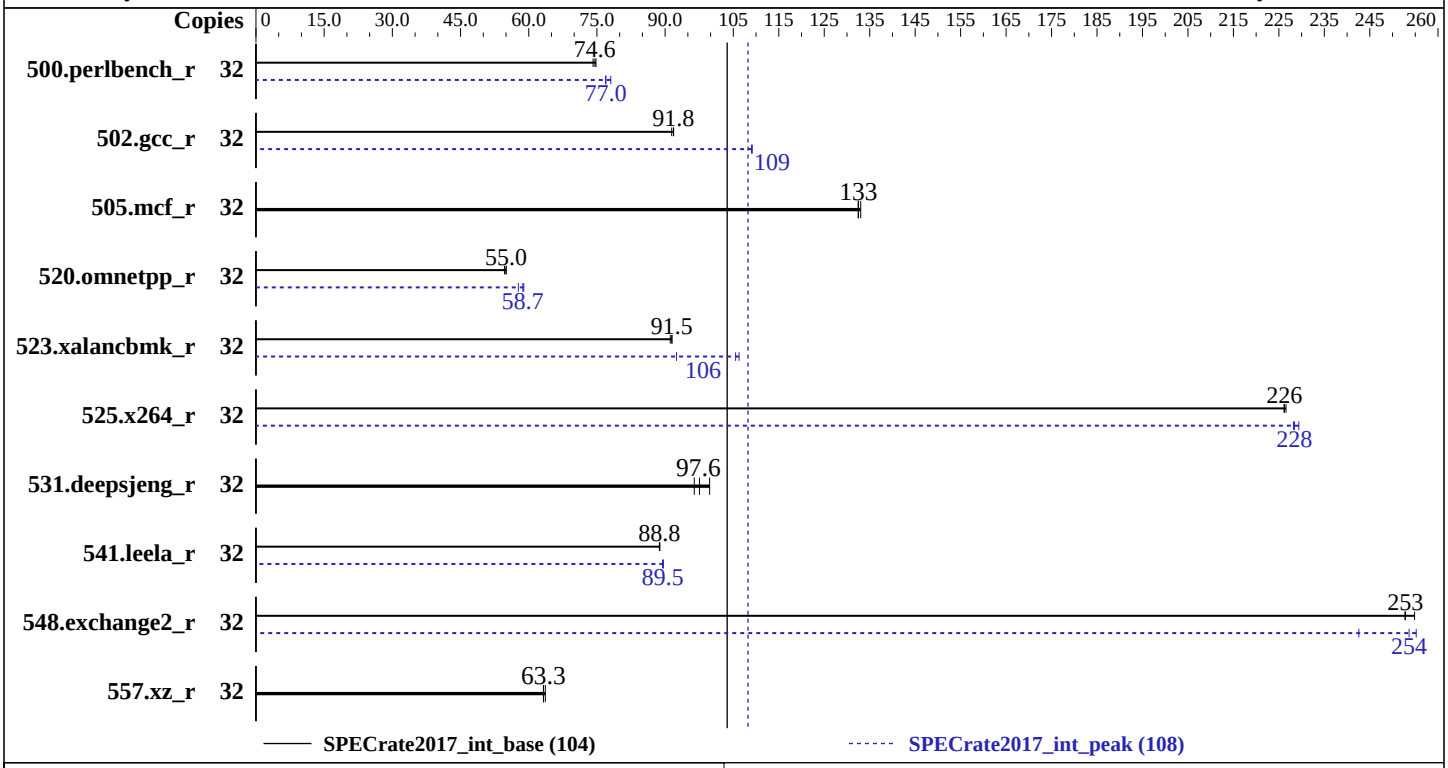

Hardware

CPU Name:	AMD EPYC 7371
Max MHz.:	3800
Nominal:	3100
Enabled:	16 cores, 1 chip, 2 threads/core
Orderable:	1 chip
Cache L1:	64 KB I + 32 KB D on chip per core
L2:	512 KB I+D on chip per core
L3:	64 MB I+D on chip per chip, 8 MB shared / 2 cores
Other:	None
Memory:	512 GB (8 x 64 GB 4Rx4 PC4-2666V-L)
Storage:	1 x 400 GB SAS SSD RAID 0
Other:	None

Software

OS:	SUSE linux Enterprise Server 12 (x86_64) SP3 Kernel version 4.4.132-94.33-default
Compiler:	C/C++: Version 1.3.0 of AOCC Fortran: Version 4.8.2 of GCC
Parallel:	No
Firmware:	HPE BIOS Version A41 10/02/2018 released Oct-2018
File System:	btrfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	32/64-bit
Other:	jemalloc memory allocator library V5.1.0

SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise
(Test Sponsor: HPE)
ProLiant DL325 Gen10
(3.10 GHz, AMD EPYC 7371)

SPECrate2017_int_base = 104

SPECrate2017_int_peak = 108

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2019
Hardware Availability: Apr-2019
Software Availability: Dec-2018

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	32	681	74.8	687	74.2	**683**	**74.6**	32	**662**	**77.0**	663	76.9	653	78.0
502.gcc_r	32	**493**	**91.8**	493	91.9	495	91.4	32	**415**	**109**	416	109	415	109
505.mcf_r	32	**390**	**133**	389	133	390	132	32	**390**	**133**	389	133	390	132
520.omnetpp_r	32	763	55.0	768	54.7	**763**	**55.0**	32	728	57.7	**715**	**58.7**	713	58.9
523.xalancbmk_r	32	**369**	**91.5**	369	91.5	371	91.1	32	**320**	**106**	318	106	365	92.5
525.x264_r	32	248	226	247	227	**248**	**226**	32	**245**	**228**	246	228	244	229
531.deepsjeng_r	32	**376**	**97.6**	367	99.8	380	96.4	32	**376**	**97.6**	367	99.8	380	96.4
541.leela_r	32	597	88.7	**597**	**88.8**	597	88.8	32	**592**	**89.5**	593	89.4	591	89.6
548.exchange2_r	32	329	255	**332**	**253**	332	253	32	329	255	**331**	**254**	346	243
557.xz_r	32	**546**	**63.3**	543	63.6	547	63.2	32	**546**	**63.3**	543	63.6	547	63.2

SPECrate2017_int_base = 104

SPECrate2017_int_peak = 108

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/

The AOCC Gold Linker plugin was installed and used for the link stage.

The AOCC Fortran Plugin version 1.3.0 was used to leverage AOCC optimizers
with gfortran. It is available here:
http://developer.amd.com/amd-aocc/

jemalloc: configured and built with GCC v4.8.5 in RHEL v7.2 under default conditions.

jemalloc uses environment variable MALLOC_CONF with values narenas and lg_chunk:
  narenas: sets the maximum number of arenas to use for automatic multiplexing of
           threads and arenas.
  lg_chunk: set the virtual memory chunk size (log base 2). For example,
            lg_chunk:21 sets the default chunk size to 2^21 = 2MiB.
jemalloc uses environment variable MALLOC_CONF
with values narenas and lg_chunk:
narenas: sets the maximum number of arenas to use
for automatic multiplexing
of threads and arenas.
lg_chunk: set the virtual memory chunk size (log
base 2). For example,
lg_chunk:21 sets the default chunk size to 2^21 =
2MiB.
```

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>

Set dirty_ratio=8 to limit dirty cache to 8% of memory
Set swappiness=1 to swap only if necessary
Set zone_reclaim_mode=1 to free local node memory and avoid remote memory
sync then drop_caches=3 to reset caches before invoking runcpu

dirty_ratio, swappiness, zone_reclaim_mode and drop_caches were
all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages were enabled for this run (OS default)
```

General Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/amd1812na_rate_revA_lib/64;/home/cpu2017/amd1812na_rate_revA_lib/32:"

Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using RHEL 7.4

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
jemalloc: configured and built with GCC v4.8.2 in RHEL v7.2 under default conditions.
jemalloc: sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

```
BIOS Configuration
Thermal Configuration set to Maximum Cooling
Performance Determinism set to Power Deterministic
Workload Power and Utilization Monitoring set to Disabled
 Minimum Processor Idle Power core C-State set to C6 State
```

(Continued on next page)

Platform Notes (Continued)

```
Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9
running on linux-qlr8 Tue Feb  5 11:54:39 2019

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
   https://www.spec.org/cpu2017/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : AMD EPYC 7371 16-Core Processor
      1  "physical id"s (chips)
      32 "processors"
   cores, siblings (Caution: counting these is hw and system dependent. The following
   excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
      cpu cores : 16
      siblings  : 32
      physical 0: cores 0 1 4 5 8 9 12 13 16 17 20 21 24 25 28 29

From lscpu:
     Architecture:          x86_64
     CPU op-mode(s):        32-bit, 64-bit
     Byte Order:            Little Endian
     CPU(s):                32
     On-line CPU(s) list:   0-31
     Thread(s) per core:    2
     Core(s) per socket:    16
     Socket(s):             1
     NUMA node(s):          4
     Vendor ID:             AuthenticAMD
     CPU family:            23
     Model:                 1
     Model name:            AMD EPYC 7371 16-Core Processor
     Stepping:              2
     CPU MHz:               3100.000
     CPU max MHz:           3100.0000
     CPU min MHz:           2500.0000
     BogoMIPS:              6188.22
     Virtualization:        AMD-V
     L1d cache:             32K
     L1i cache:             64K
     L2 cache:              512K
     L3 cache:              8192K
     NUMA node0 CPU(s):     0-3,16-19
     NUMA node1 CPU(s):     4-7,20-23
     NUMA node2 CPU(s):     8-11,24-27
     NUMA node3 CPU(s):     12-15,28-31
     Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
```

(Continued on next page)

Platform Notes (Continued)

```
      pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
      constant_tsc rep_good nopl nonstop_tsc extd_apicid amd_dcm aperfmperf eagerfpu pni
      pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx f16c
      rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
      osvw skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_l2 mwaitx arat cpb
      hw_pstate ssbd retpoline retpoline_amd npt lbrv svm_lock nrip_save tsc_scale
      vmcb_clean flushbyasid decodeassists pausefilter pfthreshold vmmcall avic fsgsbase
      bmi1 avx2 smep bmi2 rdseed adx smap clflushopt sha_ni xsaveopt xsavec xgetbv1 clzero
      irperf ibpb overflow_recov succor smca

  /proc/cpuinfo cache data
     cache size : 512 KB

  From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
  physical chip.
    available: 4 nodes (0-3)
    node 0 cpus: 0 1 2 3 16 17 18 19
    node 0 size: 128841 MB
    node 0 free: 128664 MB
    node 1 cpus: 4 5 6 7 20 21 22 23
    node 1 size: 129022 MB
    node 1 free: 128844 MB
    node 2 cpus: 8 9 10 11 24 25 26 27
    node 2 size: 129022 MB
    node 2 free: 128864 MB
    node 3 cpus: 12 13 14 15 28 29 30 31
    node 3 size: 129021 MB
    node 3 free: 128856 MB
    node distances:
    node   0   1   2   3
      0:  10  16  16  16
      1:  16  10  16  16
      2:  16  16  10  16
      3:  16  16  16  10

  From /proc/meminfo
     MemTotal:       528289016 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  /usr/bin/lsb_release -d
     SUSE Linux Enterprise Server 12 SP3

  From /etc/*release* /etc/*version*
     SuSE-release:
        SUSE Linux Enterprise Server 12 (x86_64)
        VERSION = 12
```

(Continued on next page)

Platform Notes (Continued)

```
       PATCHLEVEL = 3
       # This file is deprecated and will be removed in a future service pack or release.
       # Please check /etc/os-release for details about this release.
    os-release:
       NAME="SLES"
       VERSION="12-SP3"
       VERSION_ID="12.3"
       PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"
       ID="sles"
       ANSI_COLOR="0;32"
       CPE_NAME="cpe:/o:suse:sles:12:sp3"

 uname -a:
    Linux linux-qlr8 4.4.132-94.33-default #1 SMP Tue May 29 20:09:56 UTC 2018 (76aae3b)
    x86_64 x86_64 x86_64 GNU/Linux

 Kernel self-reported vulnerability status:

 CVE-2017-5754 (Meltdown):          Not affected
 CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
 CVE-2017-5715 (Spectre variant 2): Mitigation: Full AMD retpoline + IBPB

 run-level 3 Feb 5 11:53 last=5

 SPEC is set to: /home/cpu2017
    Filesystem     Type  Size  Used Avail Use% Mounted on
    /dev/sda4      xfs   331G  4.4G  326G   2% /home

 Additional information from dmidecode follows.  WARNING: Use caution when you interpret
 this section. The 'dmidecode' program reads system data which is "intended to allow
 hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   BIOS HPE A41 10/02/2018
   Memory:
    8x UNKNOWN NOT AVAILABLE
    8x UNKNOWN NOT AVAILABLE 64 GB 4 rank 2666

 (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
 CC  502.gcc_r(peak)
------------------------------------------------------------------------------
AOCC.LLVM.1.3.0.B34.2018_10_22 clang version 7.0.0 (CLANG: Jenkins
  AOCC_1_3_0_Release-Build#34) (based on LLVM AOCC.LLVM.1.3.0.B34.2018_10_22)
```

(Continued on next page)

Compiler Version Notes (Continued)

```
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/aocc1.3.0/AOCC-1.3.0-Compiler/bin
------------------------------------------------------------------------------

==============================================================================
 CXXC 523.xalancbmk_r(peak)
------------------------------------------------------------------------------
AOCC.LLVM.1.3.0.B34.2018_10_22 clang version 7.0.0 (CLANG: Jenkins
  AOCC_1_3_0_Release-Build#34) (based on LLVM AOCC.LLVM.1.3.0.B34.2018_10_22)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/aocc1.3.0/AOCC-1.3.0-Compiler/bin
------------------------------------------------------------------------------

==============================================================================
 CC  500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
     525.x264_r(base) 557.xz_r(base, peak)
------------------------------------------------------------------------------
AOCC.LLVM.1.3.0.B34.2018_10_22 clang version 7.0.0 (CLANG: Jenkins
  AOCC_1_3_0_Release-Build#34) (based on LLVM AOCC.LLVM.1.3.0.B34.2018_10_22)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/aocc1.3.0/AOCC-1.3.0-Compiler/bin
------------------------------------------------------------------------------

==============================================================================
 CXXC 520.omnetpp_r(base, peak) 523.xalancbmk_r(base) 531.deepsjeng_r(base,
     peak) 541.leela_r(base)
------------------------------------------------------------------------------
AOCC.LLVM.1.3.0.B34.2018_10_22 clang version 7.0.0 (CLANG: Jenkins
  AOCC_1_3_0_Release-Build#34) (based on LLVM AOCC.LLVM.1.3.0.B34.2018_10_22)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/aocc1.3.0/AOCC-1.3.0-Compiler/bin
------------------------------------------------------------------------------

==============================================================================
CC   500.perlbench_r(peak) 525.x264_r(peak)
------------------------------------------------------------------------------
AOCC.LLVM.1.3.0.B34.2018_10_22 clang version 7.0.0 (CLANG: Jenkins
  AOCC_1_3_0_Release-Build#34) (based on LLVM AOCC.LLVM.1.3.0.B34.2018_10_22)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/aocc1.3.0/AOCC-1.3.0-Compiler/bin
------------------------------------------------------------------------------
```

(Continued on next page)

Compiler Version Notes (Continued)

```
==============================================================================
CXXC 541.leela_r(peak)
------------------------------------------------------------------------------
AOCC.LLVM.1.3.0.B34.2018_10_22 clang version 7.0.0 (CLANG: Jenkins
  AOCC_1_3_0_Release-Build#34) (based on LLVM AOCC.LLVM.1.3.0.B34.2018_10_22)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/aocc1.3.0/AOCC-1.3.0-Compiler/bin
------------------------------------------------------------------------------

==============================================================================
 FC  548.exchange2_r(base, peak)
------------------------------------------------------------------------------
GNU Fortran (GCC) 4.8.2
Copyright (C) 2013 Free Software Foundation, Inc.
GNU Fortran comes with NO WARRANTY, to the extent permitted by law.
You may redistribute copies of GNU Fortran
under the terms of the GNU General Public License.
For more information about these matters, see the file named COPYING
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
clang gfortran

Base Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64

(Continued on next page)

Base Portability Flags (Continued)

557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

500.perlbench_r: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-enable-vectorize-compares -O3 -ffast-math
-march=znver1 -mno-avx2 -fstruct-layout=3
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -inline-threshold=1000 -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -function-specialize
-z muldefs -lamdlibm -lpthread -ldl -ljemalloc

502.gcc_r: Same as 500.perlbench_r

505.mcf_r: Same as 500.perlbench_r

525.x264_r: Same as 500.perlbench_r

557.xz_r: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-enable-vectorize-compares -O3 -ffast-math
-march=znver1 -mno-avx2 -fstruct-layout=3
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -inline-threshold=1000 -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -function-specialize
-z muldefs -lpthread -ldl -ljemalloc

C++ benchmarks:
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-enable-vectorize-compares -O3 -march=znver1
-mllvm -unroll-threshold=100 -finline-aggressive -fremap-arrays
-mllvm -inline-threshold=1000 -mllvm -enable-vectorize-compares=false
-z muldefs -lpthread -ldl -ljemalloc

Fortran benchmarks:
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -Wl,-mllvm -Wl,-merge-constant
-Wl,-mllvm -Wl,-unroll-aggressive -Wl,-mllvm -Wl,-unroll-threshold=150
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-enable-vectorize-compares -O3 -mavx -madx
-funroll-loops -ffast-math -frepack-arrays -z muldefs
-fplugin=dragonegg.so -specs=integrated-as.specs
-fplugin-arg-dragonegg-llvm-option=-disable-indvar-simplify

(Continued on next page)

Base Optimization Flags (Continued)

Fortran benchmarks (continued):
-fplugin-arg-dragonegg-llvm-option=-unroll-aggressive
-fplugin-arg-dragonegg-llvm-option=-unroll-threshold:150 -lpthread -ldl
-ljemalloc -lgfortran -lamdlibm

Peak Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
clang gfortran

Peak Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -D_FILE_OFFSET_BITS=64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-enable-vectorize-compares
-fprofile-instr-generate(pass 1)
-fprofile-instr-use(pass 2) -Ofast -march=znver1
-fstruct-layout=3 -mllvm -vectorize-memory-aggressively
-mno-avx2 -mllvm -unroll-threshold=100 -fremap-arrays
-mllvm -inline-threshold=1000 -lpthread -ldl -ljemalloc

(Continued on next page)

Peak Optimization Flags (Continued)

502.gcc_r: -m32 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-enable-vectorize-compares -Ofast
-march=znver1 -fstruct-layout=3
-mllvm -vectorize-memory-aggressively -mno-avx2
-mllvm -unroll-threshold=100 -fremap-arrays
-mllvm -inline-threshold=1000 -fgnu89-inline -lpthread
-ldl -ljemalloc

505.mcf_r: basepeak = yes

525.x264_r: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-enable-vectorize-compares
-fprofile-instr-generate(pass 1)
-fprofile-instr-use(pass 2) -Ofast -march=znver1
-mno-avx2 -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-flv-function-specialization -lamdlibm -ljemalloc
-lpthread -ldl

557.xz_r: basepeak = yes

C++ benchmarks:

520.omnetpp_r: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-enable-vectorize-compares -Ofast
-march=znver1 -finline-aggressive
-mllvm -unroll-threshold=100 -fremap-arrays
-mllvm -inline-threshold=1000 -lpthread -ldl -ljemalloc

523.xalancbmk_r: -m32 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-enable-vectorize-compares -Ofast
-march=znver1 -finline-aggressive
-mllvm -unroll-threshold=100 -fremap-arrays
-mllvm -inline-threshold=1000 -lpthread -ldl -ljemalloc

531.deepsjeng_r: basepeak = yes

541.leela_r: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-enable-vectorize-compares
-fprofile-instr-generate(pass 1)
-fprofile-instr-use(pass 2) -Ofast -march=znver1
-mllvm -unroll-count=8 -mllvm -unroll-threshold=100

(Continued on next page)

Peak Optimization Flags (Continued)

541.leela_r (continued):
-lpthread -ldl -ljemalloc

Fortran benchmarks:
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -Wl,-mllvm -Wl,-merge-constant
-Wl,-mllvm -Wl,-unroll-aggressive -Wl,-mllvm -Wl,-unroll-threshold=150
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-enable-vectorize-compares -O3 -mavx -madx
-funroll-loops -ffast-math -frepack-arrays -fplugin=dragonegg.so
-specs=integrated-as.specs
-fplugin-arg-dragonegg-llvm-option=-disable-indvar-simplify
-fplugin-arg-dragonegg-llvm-option=-unroll-aggressive
-fplugin-arg-dragonegg-llvm-option=-unroll-threshold:150 -lpthread -ldl
-ljemalloc -lgfortran -lamdlibm

Peak Other Flags

C benchmarks:

502.gcc_r: -L/root/work/lib/jemalloc510/lib32

C++ benchmarks:

523.xalancbmk_r: -L/root/work/lib/jemalloc510/lib32

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/aocc130-flags-revA2.html
http://www.spec.org/cpu2017/flags/gcc.2017-11-20.html
http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-V1.2-EPYC-revD.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/aocc130-flags-revA2.xml
http://www.spec.org/cpu2017/flags/gcc.2017-11-20.xml
http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-V1.2-EPYC-revD.xml

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.5 on 2019-02-05 12:54:38-0500.
Report generated on 2019-04-03 17:24:04 by CPU2017 PS formatter v6067.
Originally published on 2019-04-03.