SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge C6525 (AMD EPYC 7642, 2.30 GHz)

SPECspeed®2017_fp_base = 166

SPECspeed®2017_fp_peak = 170

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Oct-2019
Hardware Availability: Feb-2020
Software Availability: Aug-2019

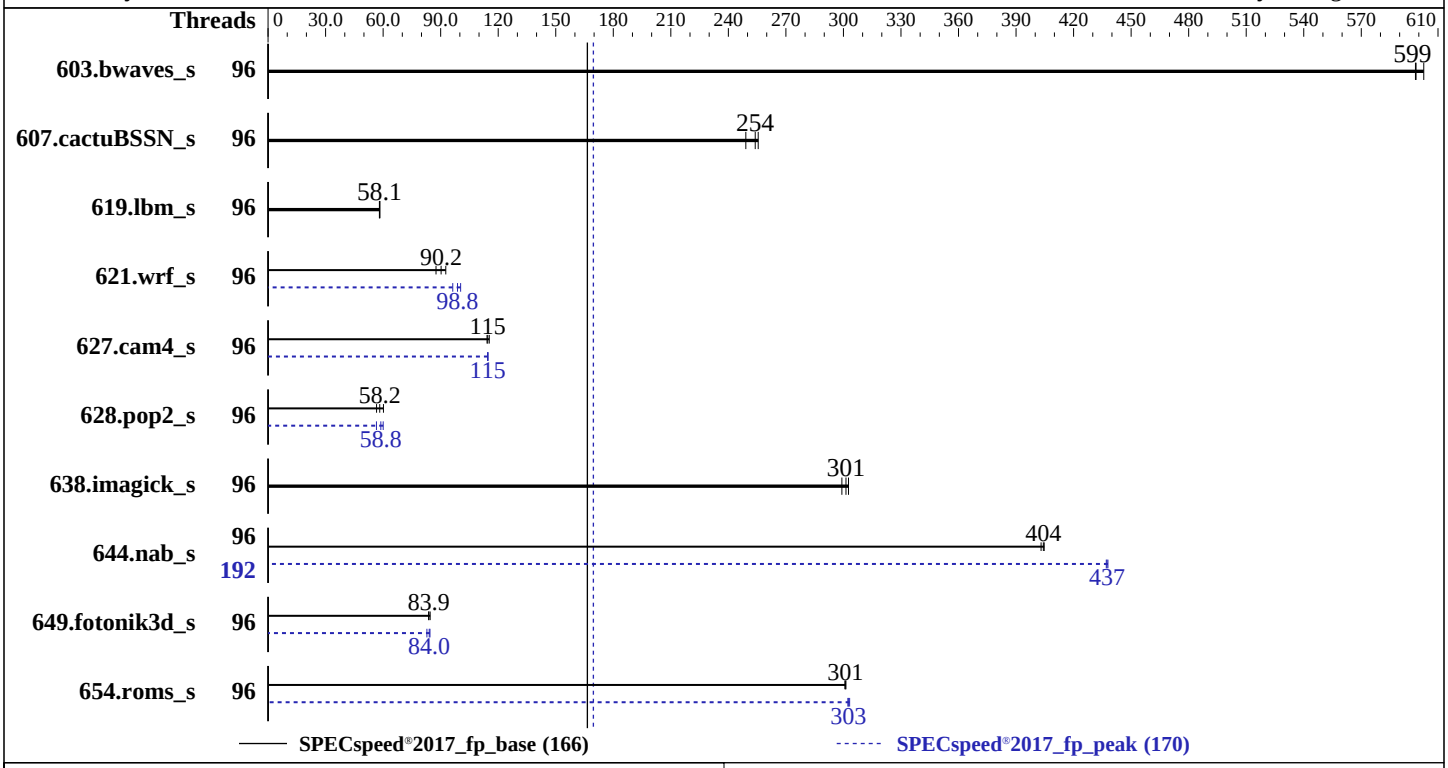

Hardware

CPU Name:	AMD EPYC 7642
Max MHz:	3300
Nominal:	2300
Enabled:	96 cores, 2 chips, 2 threads/core
Orderable:	1,2 chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	512 KB I+D on chip per core
L3:	256 MB I+D on chip per chip, 16 MB shared / 3 cores
Other:	None
Memory:	512 GB (16 x 32 GB 2Rx4 PC4-3200AA-R)
Storage:	1 x 480 GB SAS SSD
Other:	None

Software

OS:	SUSE Linux Enterprise Server 15 SP1 kernel 4.12.14-195-default
Compiler:	C/C++/Fortran: Version 2.0.0 of AOCC
Parallel:	Yes
Firmware:	Version 1.0.1 released Sep-2019
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	jemalloc: jemalloc memory allocator library v5.2.0
Power Management:	BIOS set to prefer performance at the cost of additional power usage.

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	96	97.9	603	98.6	598	**98.6**	**599**	96	97.9	603	98.6	598	**98.6**	**599**
607.cactuBSSN_s	96	**65.6**	**254**	65.2	256	66.9	249	96	**65.6**	**254**	65.2	256	66.9	249
619.lbm_s	96	89.8	58.3	90.2	58.1	**90.1**	**58.1**	96	89.8	58.3	90.2	58.1	**90.1**	**58.1**
621.wrf_s	96	143	92.7	151	87.6	**147**	**90.2**	96	**134**	**98.8**	132	100	137	96.3
627.cam4_s	96	**77.4**	**115**	77.6	114	76.8	115	96	77.3	115	**77.3**	**115**	77.4	114
628.pop2_s	96	210	56.6	197	60.2	**204**	**58.2**	96	210	56.5	198	60.0	**202**	**58.8**
638.imagick_s	96	**47.9**	**301**	48.2	299	47.7	303	96	**47.9**	**301**	48.2	299	47.7	303
644.nab_s	96	43.4	403	**43.2**	**404**	43.2	405	192	39.9	438	40.0	437	**39.9**	**437**
649.fotonik3d_s	96	108	84.5	**109**	**83.9**	109	83.7	96	110	82.8	**108**	**84.0**	108	84.4
654.roms_s	96	52.4	301	52.3	301	**52.3**	**301**	96	52.1	302	**52.0**	**303**	51.9	303

SPECspeed®2017_fp_base = 166

SPECspeed®2017_fp_peak = 170

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
```

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

Set dirty_ratio=8 to limit dirty cache to 8% of memory
Set swappiness=1 to swap only if necessary
Set zone_reclaim_mode=1 to free local node memory and avoid remote memory
sync then drop_caches=3 to reset caches before invoking runcpu

dirty_ratio, swappiness, zone_reclaim_mode and drop_caches were
all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages set to 'always' for this run (OS default)
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
GOMP_CPU_AFFINITY = "0-191"
LD_LIBRARY_PATH =
     "/root/cpu2017-1.0.5/cpu2017-1.1.0/amd_speed_aocc200_rome_C_lib/64;/root
     /cpu2017-1.0.5/cpu2017-1.1.0/amd_speed_aocc200_rome_C_lib/32:"
MALLOC_CONF = "retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "192"

Environment variables set by runcpu during the 621.wrf_s peak run:
GOMP_CPU_AFFINITY = "0-95"

Environment variables set by runcpu during the 627.cam4_s peak run:
GOMP_CPU_AFFINITY = "0-95"

Environment variables set by runcpu during the 628.pop2_s peak run:
GOMP_CPU_AFFINITY = "0-95"

Environment variables set by runcpu during the 644.nab_s peak run:
GOMP_CPU_AFFINITY = "0 96 1 97 2 98 3 99 4 100 5 101 6 102 7 103 8 104 9 105
     10 106 11 107 12 108 13 109 14 110 15 111 16 112 17 113 18 114 19 115 20
     116 21 117 22 118 23 119 24 120 25 121 26 122 27 123 28 124 29 125 30
     126 31 127 32 128 33 129 34 130 35 131 36 132 37 133 38 134 39 135 40
     136 41 137 42 138 43 139 44 140 45 141 46 142 47 143 48 144 49 145 50
     146 51 147 52 148 53 149 54 150 55 151 56 152 57 153 58 154 59 155 60
     156 61 157 62 158 63 159 64 160 65 161 66 162 67 163 68 164 69 165 70
     166 71 167 72 168 73 169 74 170 75 171 76 172 77 173 78 174 79 175 80
     176 81 177 82 178 83 179 84 180 85 181 86 182 87 183 88 184 89 185 90
     186 91 187 92 188 93 189 94 190 95 191"

Environment variables set by runcpu during the 649.fotonik3d_s peak run:
GOMP_CPU_AFFINITY = "0-95"

Environment variables set by runcpu during the 654.roms_s peak run:
GOMP_CPU_AFFINITY = "0-95"
```

General Notes

```
Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using Fedora 26

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
```

(Continued on next page)

General Notes (Continued)

```
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v9.1.0 in Ubuntu 19.04 with -O3 -znver2 -flto
jemalloc 5.2.0 is available here:
https://github.com/jemalloc/jemalloc/releases/download/5.2.0/jemalloc-5.2.0.tar.bz2
```

Platform Notes

```
 BIOS settings:
  NUMA Nodes Per Socket set to 4
  CCX as NUMA Domain set to Enabled
  System Profile set to Custom
  CPU Power Management set to Maximum Performance
  Memory Frequency set to Maximum Performance
  Turbo Boost Enabled
  Cstates set to Enabled
  Memory Patrol Scrub Disabled
  Memory Refresh Rate set to 1x
  PCI ASPM L1 Link Power Management Disabled
  Determinism Slider set to Power Determinism
  Efficiency Optimized Mode Disabled
  Memory Interleaving set to Disabled

 Sysinfo program /root/cpu2017-1.0.5/cpu2017-1.1.0/bin/sysinfo
 Rev: r6365 of 2019-08-21 295195f888a3d7edb1e6e46a485a0011
 running on linux-g3ob Sat Oct 26 11:49:19 2019

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : AMD EPYC 7642 48-Core Processor
       2  "physical id"s (chips)
       192 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The following
    excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
       cpu cores : 48
       siblings  : 96
       physical 0: cores 0 1 2 4 5 6 8 9 10 12 13 14 16 17 18 20 21 22 24 25 26 28 29 30
       32 33 34 36 37 38 40 41 42 44 45 46 48 49 50 52 53 54 56 57 58 60 61 62
       physical 1: cores 0 1 2 4 5 6 8 9 10 12 13 14 16 17 18 20 21 22 24 25 26 28 29 30
       32 33 34 36 37 38 40 41 42 44 45 46 48 49 50 52 53 54 56 57 58 60 61 62
```

(Continued on next page)

Platform Notes (Continued)

```
 From lscpu:
      Architecture:        x86_64
      CPU op-mode(s):      32-bit, 64-bit
      Byte Order:          Little Endian
      Address sizes:       43 bits physical, 48 bits virtual
      CPU(s):              192
      On-line CPU(s) list: 0-191
      Thread(s) per core:  2
      Core(s) per socket:  48
      Socket(s):           2
      NUMA node(s):        32
      Vendor ID:           AuthenticAMD
      CPU family:          23
      Model:               49
      Model name:          AMD EPYC 7642 48-Core Processor
      Stepping:            0
      CPU MHz:             2295.709
      BogoMIPS:            4591.41
      Virtualization:      AMD-V
      L1d cache:           32K
      L1i cache:           32K
      L2 cache:            512K
      L3 cache:            16384K
      NUMA node0 CPU(s):   0-2,96-98
      NUMA node1 CPU(s):   3-5,99-101
      NUMA node2 CPU(s):   6-8,102-104
      NUMA node3 CPU(s):   9-11,105-107
      NUMA node4 CPU(s):   12-14,108-110
      NUMA node5 CPU(s):   15-17,111-113
      NUMA node6 CPU(s):   18-20,114-116
      NUMA node7 CPU(s):   21-23,117-119
      NUMA node8 CPU(s):   24-26,120-122
      NUMA node9 CPU(s):   27-29,123-125
      NUMA node10 CPU(s):  30-32,126-128
      NUMA node11 CPU(s):  33-35,129-131
      NUMA node12 CPU(s):  36-38,132-134
      NUMA node13 CPU(s):  39-41,135-137
      NUMA node14 CPU(s):  42-44,138-140
      NUMA node15 CPU(s):  45-47,141-143
      NUMA node16 CPU(s):  48-50,144-146
      NUMA node17 CPU(s):  51-53,147-149
      NUMA node18 CPU(s):  54-56,150-152
      NUMA node19 CPU(s):  57-59,153-155
      NUMA node20 CPU(s):  60-62,156-158
      NUMA node21 CPU(s):  63-65,159-161
      NUMA node22 CPU(s):  66-68,162-164
```


(Continued on next page)

Platform Notes (Continued)

```
      NUMA node23 CPU(s):  69-71,165-167
      NUMA node24 CPU(s):  72-74,168-170
      NUMA node25 CPU(s):  75-77,171-173
      NUMA node26 CPU(s):  78-80,174-176
      NUMA node27 CPU(s):  81-83,177-179
      NUMA node28 CPU(s):  84-86,180-182
      NUMA node29 CPU(s):  87-89,183-185
      NUMA node30 CPU(s):  90-92,186-188
      NUMA node31 CPU(s):  93-95,189-191
      Flags:               fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
      pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
      constant_tsc rep_good nopl xtopology nonstop_tsc cpuid extd_apicid aperfmperf pni
      pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx
      f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse
      3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
      perfctr_l2 mwaitx cpb cat_l3 cdp_l3 hw_pstate sme ssbd sev ibrs ibpb stibp vmmcall
      fsgsbase bmi1 avx2 smep bmi2 cqm rdt_a rdseed adx smap clflushopt clwb sha_ni
      xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
      clzero irperf xsaveerptr arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean
      flushbyasid decodeassists pausefilter pfthreshold avic v_vmsave_vmload vgif umip
      rdpid overflow_recov succor smca

 /proc/cpuinfo cache data
    cache size : 512 KB

 From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
 physical chip.
   available: 32 nodes (0-31)
   node 0 cpus: 0 1 2 96 97 98
   node 0 size: 15676 MB
   node 0 free: 15631 MB
   node 1 cpus: 3 4 5 99 100 101
   node 1 size: 16126 MB
   node 1 free: 16100 MB
   node 2 cpus: 6 7 8 102 103 104
   node 2 size: 16126 MB
   node 2 free: 16109 MB
   node 3 cpus: 9 10 11 105 106 107
   node 3 size: 16125 MB
   node 3 free: 16107 MB
   node 4 cpus: 12 13 14 108 109 110
   node 4 size: 16126 MB
   node 4 free: 15976 MB
   node 5 cpus: 15 16 17 111 112 113
   node 5 size: 16126 MB
   node 5 free: 16042 MB
   node 6 cpus: 18 19 20 114 115 116
```

(Continued on next page)

Platform Notes (Continued)

```
node 6 size: 16126 MB
node 6 free: 15755 MB
node 7 cpus: 21 22 23 117 118 119
node 7 size: 16125 MB
node 7 free: 16038 MB
node 8 cpus: 24 25 26 120 121 122
node 8 size: 16126 MB
node 8 free: 16070 MB
node 9 cpus: 27 28 29 123 124 125
node 9 size: 16126 MB
node 9 free: 16107 MB
node 10 cpus: 30 31 32 126 127 128
node 10 size: 16126 MB
node 10 free: 16107 MB
node 11 cpus: 33 34 35 129 130 131
node 11 size: 16125 MB
node 11 free: 16096 MB
node 12 cpus: 36 37 38 132 133 134
node 12 size: 16126 MB
node 12 free: 16108 MB
node 13 cpus: 39 40 41 135 136 137
node 13 size: 16126 MB
node 13 free: 16109 MB
node 14 cpus: 42 43 44 138 139 140
node 14 size: 16126 MB
node 14 free: 16109 MB
node 15 cpus: 45 46 47 141 142 143
node 15 size: 16113 MB
node 15 free: 16096 MB
node 16 cpus: 48 49 50 144 145 146
node 16 size: 16126 MB
node 16 free: 16110 MB
node 17 cpus: 51 52 53 147 148 149
node 17 size: 16126 MB
node 17 free: 16110 MB
node 18 cpus: 54 55 56 150 151 152
node 18 size: 16126 MB
node 18 free: 16110 MB
node 19 cpus: 57 58 59 153 154 155
node 19 size: 16096 MB
node 19 free: 16080 MB
node 20 cpus: 60 61 62 156 157 158
node 20 size: 16126 MB
node 20 free: 16110 MB
node 21 cpus: 63 64 65 159 160 161
node 21 size: 16126 MB
node 21 free: 16110 MB
```

(Continued on next page)

Platform Notes (Continued)

```
node 22 cpus: 66 67 68 162 163 164
node 22 size: 16126 MB
node 22 free: 16110 MB
node 23 cpus: 69 70 71 165 166 167
node 23 size: 16125 MB
node 23 free: 16110 MB
node 24 cpus: 72 73 74 168 169 170
node 24 size: 16126 MB
node 24 free: 16106 MB
node 25 cpus: 75 76 77 171 172 173
node 25 size: 16126 MB
node 25 free: 16110 MB
node 26 cpus: 78 79 80 174 175 176
node 26 size: 16126 MB
node 26 free: 16110 MB
node 27 cpus: 81 82 83 177 178 179
node 27 size: 16125 MB
node 27 free: 16109 MB
node 28 cpus: 84 85 86 180 181 182
node 28 size: 16126 MB
node 28 free: 16110 MB
node 29 cpus: 87 88 89 183 184 185
node 29 size: 16126 MB
node 29 free: 16107 MB
node 30 cpus: 90 91 92 186 187 188
node 30 size: 16126 MB
node 30 free: 16110 MB
node 31 cpus: 93 94 95 189 190 191
node 31 size: 16124 MB
node 31 free: 16108 MB
node distances:
node   0   1   2   3   4   5   6   7   8   9  10  11  12  13  14  15  16  17  18  19
20  21  22  23  24  25  26  27  28  29  30  31
  0:  10  11  11  11  12  12  12  12  12  12  12  12  12  12  12  12  32  32  32  32
  32  32  32  32  32  32  32  32  32  32  32  32
  1:  11  10  11  11  12  12  12  12  12  12  12  12  12  12  12  12  32  32  32  32
  32  32  32  32  32  32  32  32  32  32  32  32
  2:  11  11  10  11  12  12  12  12  12  12  12  12  12  12  12  12  32  32  32  32
  32  32  32  32  32  32  32  32  32  32  32  32
  3:  11  11  11  10  12  12  12  12  12  12  12  12  12  12  12  12  32  32  32  32
  32  32  32  32  32  32  32  32  32  32  32  32
  4:  12  12  12  12  10  11  11  11  12  12  12  12  12  12  12  12  32  32  32  32
  32  32  32  32  32  32  32  32  32  32  32  32
  5:  12  12  12  12  11  10  11  11  12  12  12  12  12  12  12  12  32  32  32  32
  32  32  32  32  32  32  32  32  32  32  32  32
  6:  12  12  12  12  11  11  10  11  12  12  12  12  12  12  12  12  32  32  32  32
  32  32  32  32  32  32  32  32  32  32  32  32
```

(Continued on next page)

Platform Notes (Continued)

```
 7:  12  12  12  12  11  11  11  10  12  12  12  12  12  12  12  12  32  32  32  32
 32  32  32  32  32  32  32  32  32  32  32  32
 8:  12  12  12  12  12  12  12  12  10  11  11  11  12  12  12  12  32  32  32  32
 32  32  32  32  32  32  32  32  32  32  32  32
 9:  12  12  12  12  12  12  12  12  11  10  11  11  12  12  12  12  32  32  32  32
 32  32  32  32  32  32  32  32  32  32  32  32
10:  12  12  12  12  12  12  12  12  11  11  10  11  12  12  12  12  32  32  32  32
32  32  32  32  32  32  32  32  32  32  32  32
11:  12  12  12  12  12  12  12  12  11  11  11  10  12  12  12  12  32  32  32  32
32  32  32  32  32  32  32  32  32  32  32  32
12:  12  12  12  12  12  12  12  12  12  12  12  12  10  11  11  11  32  32  32  32
32  32  32  32  32  32  32  32  32  32  32  32
13:  12  12  12  12  12  12  12  12  12  12  12  12  11  10  11  11  32  32  32  32
32  32  32  32  32  32  32  32  32  32  32  32
14:  12  12  12  12  12  12  12  12  12  12  12  12  11  11  10  11  32  32  32  32
32  32  32  32  32  32  32  32  32  32  32  32
15:  12  12  12  12  12  12  12  12  12  12  12  12  11  11  11  10  32  32  32  32
32  32  32  32  32  32  32  32  32  32  32  32
16:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  10  11  11  11
12  12  12  12  12  12  12  12  12  12  12  12
17:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  11  10  11  11
12  12  12  12  12  12  12  12  12  12  12  12
18:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  11  11  10  11
12  12  12  12  12  12  12  12  12  12  12  12
19:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  11  11  11  10
12  12  12  12  12  12  12  12  12  12  12  12
20:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12
10  11  11  11  12  12  12  12  12  12  12  12
21:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12
11  10  11  11  12  12  12  12  12  12  12  12
22:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12
11  11  10  11  12  12  12  12  12  12  12  12
23:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12
11  11  11  10  12  12  12  12  12  12  12  12
24:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12
12  12  12  12  10  11  11  11  12  12  12  12
25:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12
12  12  12  12  11  10  11  11  12  12  12  12
26:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12
12  12  12  12  11  11  10  11  12  12  12  12
27:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12
12  12  12  12  11  11  11  10  12  12  12  12
28:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12
12  12  12  12  12  12  12  12  10  11  11  11
29:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12
12  12  12  12  12  12  12  12  11  10  11  11
30:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12
```

(Continued on next page)

Platform Notes (Continued)

```
    12  12  12  12  12  12  12  12  11  11  10  11
    31:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12
    12  12  12  12  12  12  12  12  11  11  11  10

  From /proc/meminfo
     MemTotal:       527927004 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  From /etc/*release* /etc/*version*
     os-release:
        NAME="SLES"
        VERSION="15-SP1"
        VERSION_ID="15.1"
        PRETTY_NAME="SUSE Linux Enterprise Server 15 SP1"
        ID="sles"
        ID_LIKE="suse"
        ANSI_COLOR="0;32"
        CPE_NAME="cpe:/o:suse:sles:15:sp1"

  uname -a:
     Linux linux-g3ob 4.12.14-195-default #1 SMP Tue May 7 10:55:11 UTC 2019 (8fba516)
     x86_64 x86_64 x86_64 GNU/Linux

  Kernel self-reported vulnerability status:

  CVE-2018-3620 (L1 Terminal Fault):        Not affected
  Microarchitectural Data Sampling:         Not affected
  CVE-2017-5754 (Meltdown):                 Not affected
  CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled
                                            via prctl and seccomp
  CVE-2017-5753 (Spectre variant 1):        Mitigation: __user pointer sanitization
  CVE-2017-5715 (Spectre variant 2):        Mitigation: Full AMD retpoline, IBPB:
                                           conditional, IBRS_FW, STIBP: conditional, RSB
                                            filling

  run-level 3 Oct 24 12:29

  SPEC is set to: /root/cpu2017-1.0.5/cpu2017-1.1.0
     Filesystem     Type  Size  Used Avail Use% Mounted on
     /dev/sda2      xfs   440G   32G  409G   8% /

  From /sys/devices/virtual/dmi/id
      BIOS:    Dell Inc. 1.0.1 09/21/2019
      Vendor:  Dell Inc.
      Product: PowerEdge C6525
      Product Family: PowerEdge
```

(Continued on next page)

Platform Notes (Continued)

```
 Additional information from dmidecode follows.  WARNING: Use caution when you interpret
 this section. The 'dmidecode' program reads system data which is "intended to allow
 hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   Memory:
     4x 802C80B3802C 36ASF4G72PZ-3G2E2 32 GB 2 rank 3200
     4x 802C869D802C 36ASF4G72PZ-3G2E2 32 GB 2 rank 3200
     8x 80AD863280AD HMA84GR7CJR4N-XN 32 GB 2 rank 3200

 (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
C               | 619.lbm_s(base, peak) 638.imagick_s(base, peak)
                | 644.nab_s(base, peak)
------------------------------------------------------------------------------
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
------------------------------------------------------------------------------

==============================================================================
C++, C, Fortran | 607.cactuBSSN_s(base, peak)
------------------------------------------------------------------------------
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
------------------------------------------------------------------------------

==============================================================================
```


(Continued on next page)

Compiler Version Notes (Continued)

```
Fortran          | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak)
                 | 654.roms_s(base, peak)
------------------------------------------------------------------------------
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
------------------------------------------------------------------------------

==============================================================================
Fortran, C       | 621.wrf_s(base, peak) 627.cam4_s(base, peak)
                 | 628.pop2_s(base, peak)
------------------------------------------------------------------------------
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
`clang`

Fortran benchmarks:
`flang`

Benchmarks using both Fortran and C:
`flang clang`

Benchmarks using Fortran, C, and C++:
`clang++ clang flang`

Base Portability Flags

603.bwaves_s: `-DSPEC_LP64`

(Continued on next page)

Base Portability Flags (Continued)

607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
627.cam4_s: -DSPEC_CASE_FLAG -DSPEC_LP64
628.pop2_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-fremap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -z muldefs -DSPEC_OPENMP -fopenmp
-DUSE_OPENMP -fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm
-ljemalloc -lflang

Fortran benchmarks:
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver2
-funroll-loops -Mrecursive -mllvm -vector-library=LIBMVEC -z muldefs
-Kieee -fno-finite-math-only -DSPEC_OPENMP -fopenmp -DUSE_OPENMP
-fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm -ljemalloc
-lflang

Benchmarks using both Fortran and C:
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-fremap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -funroll-loops -Mrecursive -z muldefs
-Kieee -fno-finite-math-only -DSPEC_OPENMP -fopenmp -DUSE_OPENMP
-fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm -ljemalloc

(Continued on next page)

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C (continued):
`-lflang`

Benchmarks using Fortran, C, and C++:
`-std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize`
`-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC`
`-Wl,-mllvm -Wl,-reduce-array-computations=3`
`-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2`
`-fstruct-layout=3 -mllvm -unroll-threshold=50 -fremap-arrays`
`-mllvm -function-specialize -mllvm -enable-gvn-hoist`
`-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp`
`-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000`
`-flv-function-specialization -mllvm -loop-unswitch-threshold=200000`
`-mllvm -unroll-threshold=100 -mllvm -enable-partial-unswitch`
`-funroll-loops -Mrecursive -z muldefs -Kieee -fno-finite-math-only`
`-DSPEC_OPENMP -fopenmp -DUSE_OPENMP -fopenmp=libomp -lomp -lpthread`
`-ldl -lmvec -lamdlibm -ljemalloc -lflang`

Base Other Flags

C benchmarks:
`-Wno-return-type`

Fortran benchmarks:
`-Wno-return-type`

Benchmarks using both Fortran and C:
`-Wno-return-type`

Benchmarks using Fortran, C, and C++:
`-Wno-return-type`

Peak Compiler Invocation

C benchmarks:
`clang`

Fortran benchmarks:
`flang`

Benchmarks using both Fortran and C:
`flang clang`

(Continued on next page)

Peak Compiler Invocation (Continued)

Benchmarks using Fortran, C, and C++:
clang++ clang flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

619.lbm_s: basepeak = yes

638.imagick_s: basepeak = yes

644.nab_s: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -DSPEC_OPENMP -fopenmp
-DUSE_OPENMP -lmvec -lamdlibm -fopenmp=libomp -lomp
-lpthread -ldl -ljemalloc -lflang

Fortran benchmarks:

603.bwaves_s: basepeak = yes

649.fotonik3d_s: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3
-march=znver2 -funroll-loops -Mrecursive
-mllvm -vector-library=LIBMVEC -Kieee

(Continued on next page)

Peak Optimization Flags (Continued)

649.fotonik3d_s (continued):
-fno-finite-math-only -DSPEC_OPENMP -fopenmp -DUSE_OPENMP
-fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm
-ljemalloc -lflang

654.roms_s: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver2
-funroll-loops -Mrecursive -mllvm -vector-library=LIBMVEC
-Kieee -fno-finite-math-only -DSPEC_OPENMP -fopenmp
-DUSE_OPENMP -fopenmp=libomp -lomp -lpthread -ldl
-lmvec -lamdlibm -ljemalloc -lflang

Benchmarks using both Fortran and C:
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver2
-mno-sse4a -fstruct-layout=5 -mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -O3 -funroll-loops -Mrecursive -Kieee
-fno-finite-math-only -DSPEC_OPENMP -fopenmp -DUSE_OPENMP
-fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm -ljemalloc
-lflang

Benchmarks using Fortran, C, and C++:

607.cactuBSSN_s: basepeak = yes

Peak Other Flags

C benchmarks:
-Wno-return-type

Fortran benchmarks:
-Wno-return-type

Benchmarks using both Fortran and C:
-Wno-return-type

(Continued on next page)

Peak Other Flags (Continued)

Benchmarks using Fortran, C, and C++:
`-Wno-return-type`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2017/flags/aocc200-flags-B1-speed-Dell.html`
`http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE7.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2017/flags/aocc200-flags-B1-speed-Dell.xml`
`http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE7.xml`

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2019-10-26 11:49:19-0400.
Report generated on 2019-12-26 11:31:54 by CPU2017 PS formatter v6255.
Originally published on 2019-12-24.