SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge C6525 (AMD EPYC 7F72, 3.20 GHz)

SPECspeed®2017_int_base = 9.41

SPECspeed®2017_int_peak = 9.75

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Jan-2020
Hardware Availability: Apr-2020
Software Availability: Aug-2019

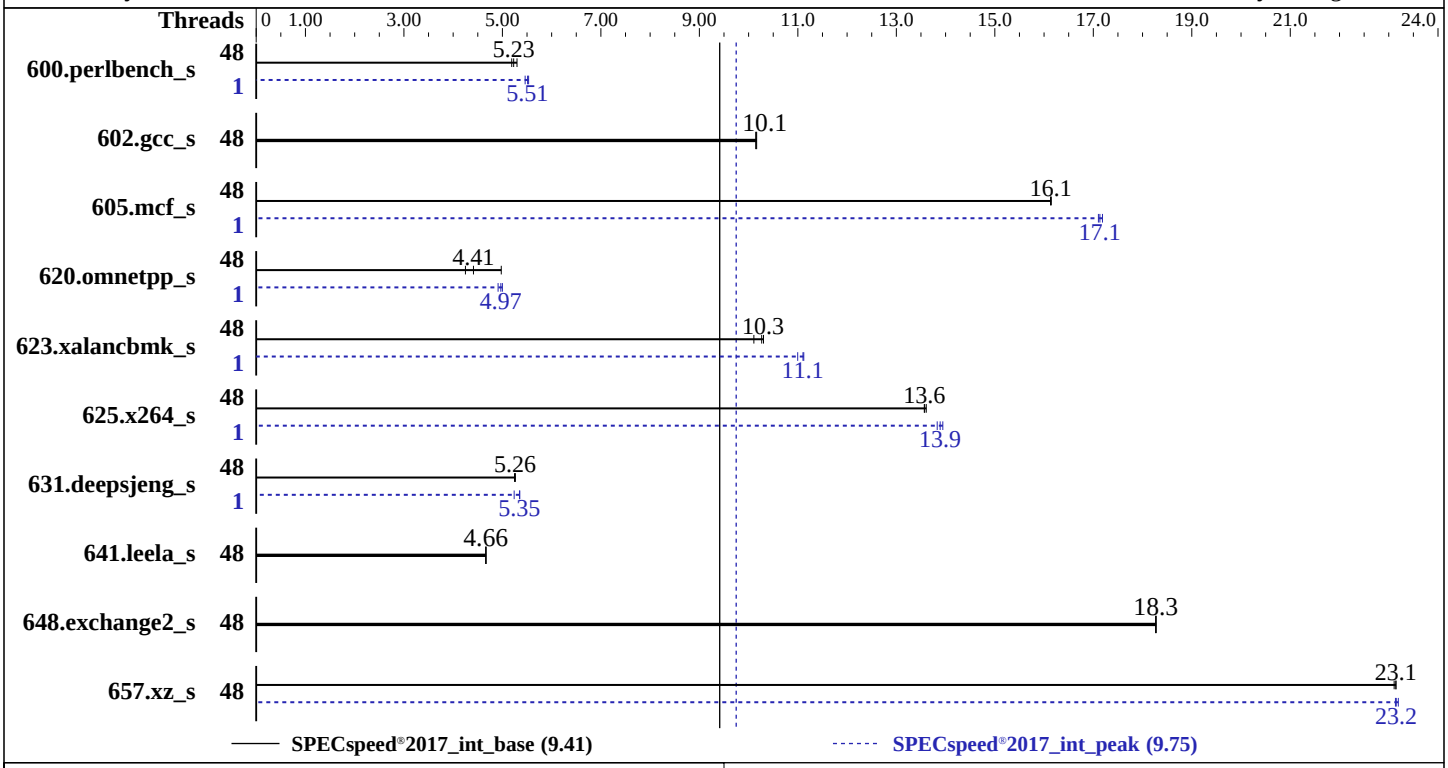

Hardware

CPU Name:	AMD EPYC 7F72
Max MHz:	3700
Nominal:	3200
Enabled:	48 cores, 2 chips
Orderable:	1,2 chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	512 KB I+D on chip per core
L3:	192 MB I+D on chip per chip, 16 MB shared / 2 cores
Other:	None
Memory:	512 GB (16 x 32 GB 2Rx4 PC4-3200AA-R, running at 3200)
Storage:	1 x 480 GB SATA SSD
Other:	None

Software

OS:	SUSE Linux Enterprise Server 15 SP1 kernel 4.12.14-197.7-default
Compiler:	C/C++/Fortran: Version 2.0.0 of AOCC
Parallel:	Yes
Firmware:	Version 1.2.5 released Dec-2019
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	32/64-bit
Other:	jemalloc: jemalloc memory allocator library v5.2.0
Power Management:	BIOS set to prefer performance at the cost of additional power usage.

SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge C6525 (AMD EPYC 7F72, 3.20 GHz)

SPECspeed®2017_int_base = 9.41

SPECspeed®2017_int_peak = 9.75

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Jan-2020
Hardware Availability: Apr-2020
Software Availability: Aug-2019

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	48	335	5.30	342	5.19	**339**	**5.23**	1	**322**	**5.51**	325	5.46	321	5.53
602.gcc_s	48	392	10.2	392	10.1	**392**	**10.1**	48	392	10.2	392	10.1	**392**	**10.1**
605.mcf_s	48	293	16.1	292	16.1	**292**	**16.1**	1	275	17.2	276	17.1	**276**	**17.1**
620.omnetpp_s	48	384	4.25	**370**	**4.41**	328	4.98	1	326	5.00	**328**	**4.97**	332	4.91
623.xalancbmk_s	48	**138**	**10.3**	138	10.3	140	10.1	1	129	11.0	127	11.1	**128**	**11.1**
625.x264_s	48	130	13.6	**130**	**13.6**	130	13.6	1	127	13.9	**127**	**13.9**	128	13.8
631.deepsjeng_s	48	272	5.26	273	5.25	**273**	**5.26**	1	274	5.24	**268**	**5.35**	268	5.35
641.leela_s	48	366	4.67	366	4.66	**366**	**4.66**	48	366	4.67	366	4.66	**366**	**4.66**
648.exchange2_s	48	161	18.3	**161**	**18.3**	161	18.3	48	161	18.3	**161**	**18.3**	161	18.3
657.xz_s	48	268	23.1	**267**	**23.1**	267	23.1	48	267	23.2	267	23.1	**267**	**23.2**

SPECspeed®2017_int_base = 9.41

SPECspeed®2017_int_peak = 9.75

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
```

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

Set dirty_ratio=8 to limit dirty cache to 8% of memory
Set swappiness=1 to swap only if necessary
Set zone_reclaim_mode=1 to free local node memory and avoid remote memory
sync then drop_caches=3 to reset caches before invoking runcpu

dirty_ratio, swappiness, zone_reclaim_mode and drop_caches were
all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages set to 'always' for this run (OS default)
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
GOMP_CPU_AFFINITY = "0-95"
LD_LIBRARY_PATH =
     "/root/cpu2017-1.1.0/amd_speed_aocc200_rome_C_lib/64;/root/cpu2017-1.1.0
     /amd_speed_aocc200_rome_C_lib/32:"
MALLOC_CONF = "retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "96"

Environment variables set by runcpu during the 600.perlbench_s peak run:
GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 605.mcf_s peak run:
GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 620.omnetpp_s peak run:
GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 623.xalancbmk_s peak run:
GOMP_CPU_AFFINITY = "0"
OMP_STACKSIZE = "128M"

Environment variables set by runcpu during the 625.x264_s peak run:
GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 631.deepsjeng_s peak run:
GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 657.xz_s peak run:
GOMP_CPU_AFFINITY = "0-47"
```

General Notes

```
Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using Fedora 26

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v9.1.0 in Ubuntu 19.04 with -O3 -znver2 -flto
```

(Continued on next page)

General Notes (Continued)

```
jemalloc 5.2.0 is available here:
https://github.com/jemalloc/jemalloc/releases/download/5.2.0/jemalloc-5.2.0.tar.bz2
```

Platform Notes

```
 BIOS settings:
 NUMA Nodes Per Socket set to 2
 CCX as NUMA Domain set to Enabled
 System Profile set to Custom
 CPU Power Management set to Maximum Performance
 Memory Frequency set to Maximum Performance
 Turbo Boost Enabled
 Cstates set to Enabled
 Memory Patrol Scrub Disabled
 Memory Refresh Rate set to 1x
 PCI ASPM L1 Link Power Management Disabled
 Determinism Slider set to Power Determinism
 Efficiency Optimized Mode Disabled
 Memory Interleaving set to Disabled
 Logical Processor Disabled

 Sysinfo program /root/cpu2017-1.1.0/bin/sysinfo
 Rev: r6365 of 2019-08-21 295195f888a3d7edb1e6e46a485a0011
 running on suse15-sp1 Wed Feb  5 04:58:26 2020

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : AMD EPYC 7F72 24-Core Processor
       2  "physical id"s (chips)
       48 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The following
    excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
       cpu cores : 24
       siblings  : 24
       physical 0: cores 0 1 4 5 8 9 12 13 16 17 20 21 24 25 28 29 32 33 36 37 40 41 44 45
       physical 1: cores 0 1 4 5 8 9 12 13 16 17 20 21 24 25 28 29 32 33 36 37 40 41 44 45

 From lscpu:
      Architecture:        x86_64
      CPU op-mode(s):      32-bit, 64-bit
      Byte Order:          Little Endian
      Address sizes:       43 bits physical, 48 bits virtual
```

(Continued on next page)

Platform Notes (Continued)

```
CPU(s):              48
On-line CPU(s) list: 0-47
Thread(s) per core:  1
Core(s) per socket:  24
Socket(s):           2
NUMA node(s):        24
Vendor ID:           AuthenticAMD
CPU family:          23
Model:               49
Model name:          AMD EPYC 7F72 24-Core Processor
Stepping:            0
CPU MHz:             3194.196
BogoMIPS:            6388.39
Virtualization:      AMD-V
L1d cache:           32K
L1i cache:           32K
L2 cache:            512K
L3 cache:            16384K
NUMA node0 CPU(s):   0,1
NUMA node1 CPU(s):   2,3
NUMA node2 CPU(s):   4,5
NUMA node3 CPU(s):   6,7
NUMA node4 CPU(s):   8,9
NUMA node5 CPU(s):   10,11
NUMA node6 CPU(s):   12,13
NUMA node7 CPU(s):   14,15
NUMA node8 CPU(s):   16,17
NUMA node9 CPU(s):   18,19
NUMA node10 CPU(s):  20,21
NUMA node11 CPU(s):  22,23
NUMA node12 CPU(s):  24,25
NUMA node13 CPU(s):  26,27
NUMA node14 CPU(s):  28,29
NUMA node15 CPU(s):  30,31
NUMA node16 CPU(s):  32,33
NUMA node17 CPU(s):  34,35
NUMA node18 CPU(s):  36,37
NUMA node19 CPU(s):  38,39
NUMA node20 CPU(s):  40,41
NUMA node21 CPU(s):  42,43
NUMA node22 CPU(s):  44,45
NUMA node23 CPU(s):  46,47
Flags:               fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf pni pclmulqdq
monitor ssse3 fma cx16 sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand
lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw
```

(Continued on next page)

Platform Notes (Continued)

```
      ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_l2 mwaitx cpb
      cat_l3 cdp_l3 hw_pstate sme ssbd sev ibrs ibpb stibp vmmcall fsgsbase bmi1 avx2 smep
      bmi2 cqm rdt_a rdseed adx smap clflushopt clwb sha_ni xsaveopt xsavec xgetbv1 xsaves
      cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local clzero irperf xsaveerptr arat npt
      lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
      pfthreshold avic v_vmsave_vmload vgif umip rdpid overflow_recov succor smca

 /proc/cpuinfo cache data
    cache size : 512 KB

 From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
 physical chip.
   available: 24 nodes (0-23)
   node 0 cpus: 0 1
   node 0 size: 21023 MB
   node 0 free: 20971 MB
   node 1 cpus: 2 3
   node 1 size: 21502 MB
   node 1 free: 21473 MB
   node 2 cpus: 4 5
   node 2 size: 21504 MB
   node 2 free: 21436 MB
   node 3 cpus: 6 7
   node 3 size: 21502 MB
   node 3 free: 21458 MB
   node 4 cpus: 8 9
   node 4 size: 21502 MB
   node 4 free: 21418 MB
   node 5 cpus: 10 11
   node 5 size: 21503 MB
   node 5 free: 21460 MB
   node 6 cpus: 12 13
   node 6 size: 21502 MB
   node 6 free: 21426 MB
   node 7 cpus: 14 15
   node 7 size: 21502 MB
   node 7 free: 21437 MB
   node 8 cpus: 16 17
   node 8 size: 21504 MB
   node 8 free: 21464 MB
   node 9 cpus: 18 19
   node 9 size: 21502 MB
   node 9 free: 21475 MB
   node 10 cpus: 20 21
   node 10 size: 21502 MB
   node 10 free: 21464 MB
   node 11 cpus: 22 23
```

(Continued on next page)

Platform Notes (Continued)

```
   node 11 size: 21491 MB
   node 11 free: 21470 MB
   node 12 cpus: 24 25
   node 12 size: 21502 MB
   node 12 free: 21484 MB
   node 13 cpus: 26 27
   node 13 size: 21502 MB
   node 13 free: 21480 MB
   node 14 cpus: 28 29
   node 14 size: 21504 MB
   node 14 free: 21487 MB
   node 15 cpus: 30 31
   node 15 size: 21502 MB
   node 15 free: 21485 MB
   node 16 cpus: 32 33
   node 16 size: 21502 MB
   node 16 free: 21485 MB
   node 17 cpus: 34 35
   node 17 size: 21503 MB
   node 17 free: 21484 MB
   node 18 cpus: 36 37
   node 18 size: 21502 MB
   node 18 free: 21485 MB
   node 19 cpus: 38 39
   node 19 size: 21502 MB
   node 19 free: 21484 MB
   node 20 cpus: 40 41
   node 20 size: 21504 MB
   node 20 free: 21487 MB
   node 21 cpus: 42 43
   node 21 size: 21502 MB
   node 21 free: 21485 MB
   node 22 cpus: 44 45
   node 22 size: 21502 MB
   node 22 free: 21484 MB
   node 23 cpus: 46 47
   node 23 size: 21502 MB
   node 23 free: 21482 MB
   node distances:
   node   0   1   2   3   4   5   6   7   8   9  10  11  12  13  14  15  16  17  18  19
   20  21  22  23
     0:  10  11  11  11  11  11  12  12  12  12  12  12  32  32  32  32  32  32  32  32
     32  32  32  32
     1:  11  10  11  11  11  11  12  12  12  12  12  12  32  32  32  32  32  32  32  32
     32  32  32  32
     2:  11  11  10  11  11  11  12  12  12  12  12  12  32  32  32  32  32  32  32  32
     32  32  32  32
```

(Continued on next page)

Platform Notes (Continued)

```
     3:  11  11  11  10  11  11  12  12  12  12  12  12  32  32  32  32  32  32  32  32
     32  32  32  32
     4:  11  11  11  11  10  11  12  12  12  12  12  12  32  32  32  32  32  32  32  32
     32  32  32  32
     5:  11  11  11  11  11  10  12  12  12  12  12  12  32  32  32  32  32  32  32  32
     32  32  32  32
     6:  12  12  12  12  12  12  10  11  11  11  11  11  32  32  32  32  32  32  32  32
     32  32  32  32
     7:  12  12  12  12  12  12  11  10  11  11  11  11  32  32  32  32  32  32  32  32
     32  32  32  32
     8:  12  12  12  12  12  12  11  11  10  11  11  11  32  32  32  32  32  32  32  32
     32  32  32  32
     9:  12  12  12  12  12  12  11  11  11  10  11  11  32  32  32  32  32  32  32  32
     32  32  32  32
    10:  12  12  12  12  12  12  11  11  11  11  10  11  32  32  32  32  32  32  32  32
    32  32  32  32
    11:  12  12  12  12  12  12  11  11  11  11  11  10  32  32  32  32  32  32  32  32
    32  32  32  32
    12:  32  32  32  32  32  32  32  32  32  32  32  32  10  11  11  11  11  11  12  12
    12  12  12  12
    13:  32  32  32  32  32  32  32  32  32  32  32  32  11  10  11  11  11  11  12  12
    12  12  12  12
    14:  32  32  32  32  32  32  32  32  32  32  32  32  11  11  10  11  11  11  12  12
    12  12  12  12
    15:  32  32  32  32  32  32  32  32  32  32  32  32  11  11  11  10  11  11  12  12
    12  12  12  12
    16:  32  32  32  32  32  32  32  32  32  32  32  32  11  11  11  11  10  11  12  12
    12  12  12  12
    17:  32  32  32  32  32  32  32  32  32  32  32  32  11  11  11  11  11  10  12  12
    12  12  12  12
    18:  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12  12  12  10  11
    11  11  11  11
    19:  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12  12  12  11  10
    11  11  11  11
    20:  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12  12  12  11  11
    10  11  11  11
    21:  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12  12  12  11  11
    11  10  11  11
    22:  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12  12  12  11  11
    11  11  10  11
    23:  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12  12  12  11  11
    11  11  11  10

  From /proc/meminfo
     MemTotal:       527958416 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB
```


(Continued on next page)

Platform Notes (Continued)

```
From /etc/*release* /etc/*version*
   os-release:
      NAME="SLES"
      VERSION="15-SP1"
      VERSION_ID="15.1"
      PRETTY_NAME="SUSE Linux Enterprise Server 15 SP1"
      ID="sles"
      ID_LIKE="suse"
      ANSI_COLOR="0;32"
      CPE_NAME="cpe:/o:suse:sles:15:sp1"

uname -a:
   Linux suse15-sp1 4.12.14-197.7-default #1 SMP Mon Jun 24 08:33:54 UTC 2019 (650fd32)
   x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-3620 (L1 Terminal Fault):        Not affected
Microarchitectural Data Sampling:         Not affected
CVE-2017-5754 (Meltdown):                 Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled
                                          via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):        Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):        Mitigation: Full AMD retpoline, IBPB:
                                          conditional, IBRS_FW, STIBP: disabled, RSB
                                          filling

run-level 3 Feb 5 04:35

SPEC is set to: /root/cpu2017-1.1.0
   Filesystem     Type  Size  Used Avail Use% Mounted on
   /dev/sda2      xfs   444G   13G  432G   3% /

From /sys/devices/virtual/dmi/id
    BIOS:    Dell Inc. 1.2.5 12/11/2019
    Vendor:  Dell Inc.
    Product: PowerEdge C6525
    Product Family: PowerEdge

Additional information from dmidecode follows.  WARNING: Use caution when you interpret
this section. The 'dmidecode' program reads system data which is "intended to allow
hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
  Memory:
    16x 802C869D802C 36ASF4G72PZ-3G2E2 32 GB 2 rank 3200
```

(Continued on next page)

Platform Notes (Continued)

```
 (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
C       | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base,
        | peak) 625.x264_s(base, peak) 657.xz_s(base, peak)
------------------------------------------------------------------------------
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
------------------------------------------------------------------------------

==============================================================================
C++     | 623.xalancbmk_s(peak)
------------------------------------------------------------------------------
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
------------------------------------------------------------------------------

==============================================================================
C++     | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base)
        | 631.deepsjeng_s(base, peak) 641.leela_s(base, peak)
------------------------------------------------------------------------------
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
------------------------------------------------------------------------------

==============================================================================
C++     | 623.xalancbmk_s(peak)
------------------------------------------------------------------------------
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
------------------------------------------------------------------------------
```


(Continued on next page)

Compiler Version Notes (Continued)

```
==============================================================================
C++     | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base)
        | 631.deepsjeng_s(base, peak) 641.leela_s(base, peak)
------------------------------------------------------------------------------
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
------------------------------------------------------------------------------

==============================================================================
Fortran | 648.exchange2_s(base, peak)
------------------------------------------------------------------------------
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Base Portability Flags

600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -DSPEC_LP64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64

(Continued on next page)

Base Portability Flags (Continued)

657.xz_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-fremap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -z muldefs -DSPEC_OPENMP -fopenmp
-fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm -ljemalloc
-lflang

C++ benchmarks:
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2
-mllvm -loop-unswitch-threshold=200000 -mllvm -vector-library=LIBMVEC
-mllvm -unroll-threshold=100 -flv-function-specialization
-mllvm -enable-partial-unswitch -z muldefs -DSPEC_OPENMP -fopenmp
-fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm -ljemalloc
-lflang

Fortran benchmarks:
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -ffast-math
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver2 -funroll-loops
-Mrecursive -mllvm -vector-library=LIBMVEC -z muldefs
-mllvm -disable-indvar-simplify -mllvm -unroll-aggressive
-mllvm -unroll-threshold=150 -DSPEC_OPENMP -fopenmp -fopenmp=libomp
-lomp -lpthread -ldl -lmvec -lamdlibm -ljemalloc -lflang

Base Other Flags

C benchmarks:
-Wno-return-type -DUSE_OPENMP

(Continued on next page)

Base Other Flags (Continued)

C++ benchmarks:
-Wno-return-type -DUSE_OPENMP

Fortran benchmarks:
-DUSE_OPENMP -Wno-return-type

Peak Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Peak Portability Flags

600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -D_FILE_OFFSET_BITS=64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

600.perlbench_s: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3

(Continued on next page)

Peak Optimization Flags (Continued)

600.perlbench_s (continued):
-fprofile-instr-generate(pass 1)
-fprofile-instr-use(pass 2) -Ofast -march=znver2
-mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -DSPEC_OPENMP -fopenmp
-lmvec -lamdlibm -fopenmp=libomp -lomp -lpthread -ldl
-ljemalloc -lflang

602.gcc_s: basepeak = yes

605.mcf_s: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -DSPEC_OPENMP -fopenmp
-lmvec -lamdlibm -fopenmp=libomp -lomp -lpthread -ldl
-ljemalloc -lflang

625.x264_s: Same as 600.perlbench_s

657.xz_s: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -DSPEC_OPENMP -fopenmp
-fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm

(Continued on next page)

Peak Optimization Flags (Continued)

657.xz_s (continued):
-ljemalloc -lflang

C++ benchmarks:

620.omnetpp_s: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -flv-function-specialization
-mllvm -unroll-threshold=100
-mllvm -enable-partial-unswitch
-mllvm -loop-unswitch-threshold=200000
-mllvm -vector-library=LIBMVEC
-mllvm -inline-threshold=1000 -DSPEC_OPENMP -fopenmp
-fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm
-ljemalloc -lflang

623.xalancbmk_s: -m32 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -flv-function-specialization
-mllvm -unroll-threshold=100
-mllvm -enable-partial-unswitch
-mllvm -loop-unswitch-threshold=200000
-mllvm -vector-library=LIBMVEC
-mllvm -inline-threshold=1000 -DSPEC_OPENMP -fopenmp
-fopenmp=libomp -lomp -lpthread -ldl -ljemalloc

631.deepsjeng_s: Same as 620.omnetpp_s

641.leela_s: basepeak = yes

Fortran benchmarks:

648.exchange2_s: basepeak = yes

Peak Other Flags

C benchmarks:
-Wno-return-type -DUSE_OPENMP

(Continued on next page)

Peak Other Flags (Continued)

C++ benchmarks (except as noted below):
`-Wno-return-type -DUSE_OPENMP`

623.xalancbmk_s: `-Wno-return-type -DUSE_OPENMP`
`-L/sppo/dev/cpu2017/v110/amd_speed_aocc200_rome_C_lib/32`

Fortran benchmarks:
`-DUSE_OPENMP -Wno-return-type`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2017/flags/aocc200-flags-B1.html`
`http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE9.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2017/flags/aocc200-flags-B1.xml`
`http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE9.xml`

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2020-02-05 05:58:26-0500.
Report generated on 2020-04-14 14:10:24 by CPU2017 PS formatter v6255.
Originally published on 2020-04-14.