# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Inspur Corporation

## Inspur NF5280A6 (AMD EPYC 7663)

**SPECrate®2017_int_base = 683**

**SPECrate®2017_int_peak = 743**

**CPU2017 License:** 3358
**Test Sponsor:** Inspur Corporation
**Tested by:** Inspur Corporation

**Test Date:** Jul-2022
**Hardware Availability:** Aug-2022
**Software Availability:** Dec-2021

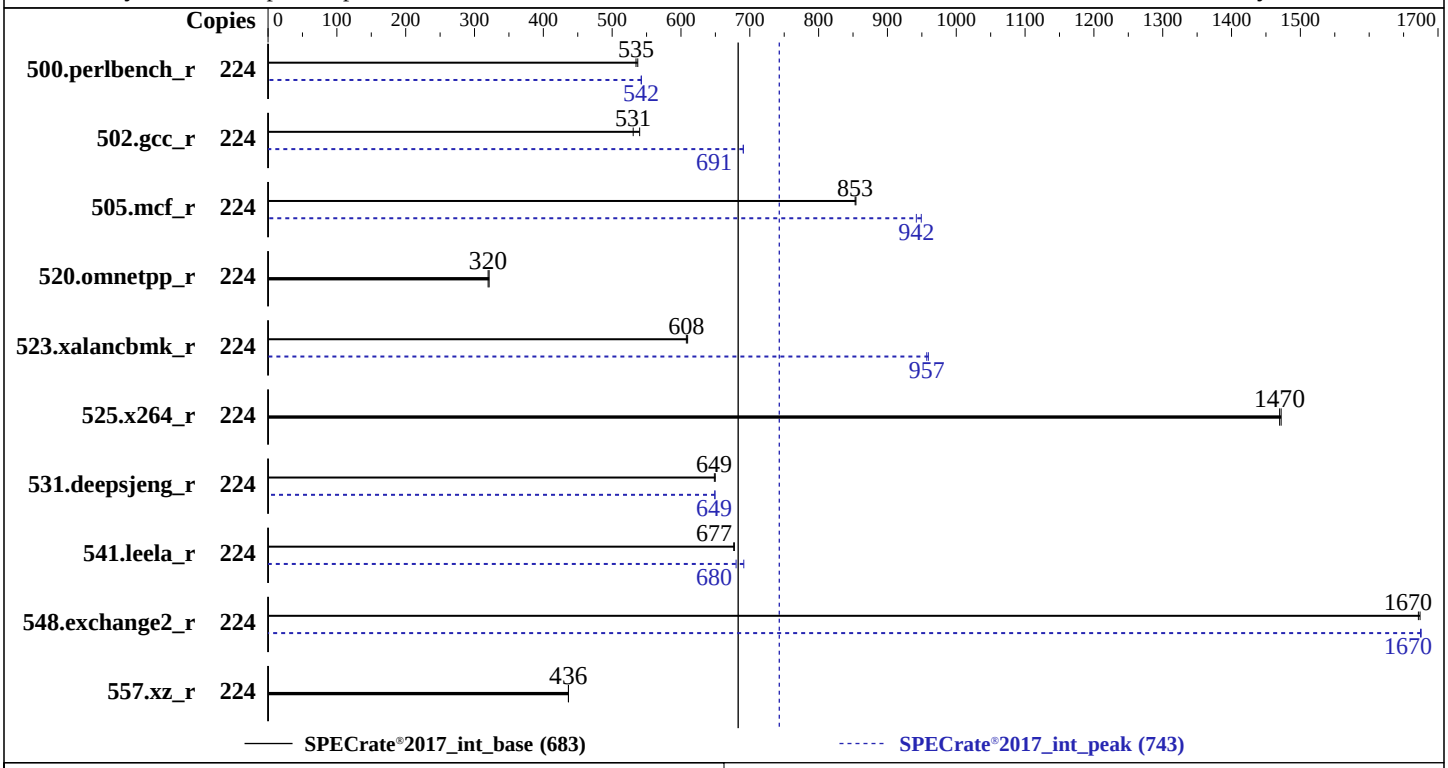


## Hardware

| | |
|---|---|
| CPU Name: | AMD EPYC 7663 |
| Max MHz: | 3500 |
| Nominal: | 2000 |
| Enabled: | 112 cores, 2 chips, 2 threads/core |
| Orderable: | 1,2 chips |
| Cache L1: | 32 KB I + 32 KB D on chip per core |
| L2: | 512 KB I+D on chip per core |
| L3: | 256 MB I+D on chip per chip, 32 MB shared / 7 cores |
| Other: | None |
| Memory: | 1 TB (32 x 32 GB 2Rx8 PC4-3200AA-R) |
| Storage: | 1 x 480 GB SATA SSD |
| Other: | None |

## Software

| | |
|---|---|
| OS: | Red Hat Enterprise Linux release 8.3 (Ootpa) 4.18.0-240.el8.x86_64 |
| Compiler: | C/C++/Fortran: Version 3.2.0 of AOCC |
| Parallel: | No |
| Firmware: | Version 7.00.04 released May-2022 |
| File System: | xfs |
| System State: | Run level 3 (multi-user) |
| Base Pointers: | 64-bit |
| Peak Pointers: | 32/64-bit |
| Other: | jemalloc: jemalloc memory allocator library v5.1.0 |
| Power Management: | BIOS and OS set to prefer performance at the cost of additional power usage. |

# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Inspur Corporation

## Inspur NF5280A6 (AMD EPYC 7663)

SPECrate®2017_int_base = 683

SPECrate®2017_int_peak = 743

**CPU2017 License:** 3358
**Test Sponsor:** Inspur Corporation
**Tested by:** Inspur Corporation

**Test Date:** Jul-2022
**Hardware Availability:** Aug-2022
**Software Availability:** Dec-2021

## Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 500.perlbench_r | 224 | 664 | 537 | **667** | **535** | | | 224 | **658** | **542** | 657 | 543 | | |
| 502.gcc_r | 224 | 587 | 540 | **598** | **531** | | | 224 | **459** | **691** | 459 | 691 | | |
| 505.mcf_r | 224 | 424 | 854 | **424** | **853** | | | 224 | 381 | 949 | **384** | **942** | | |
| 520.omnetpp_r | 224 | **919** | **320** | 915 | 321 | | | 224 | **919** | **320** | 915 | 321 | | |
| 523.xalancbmk_r | 224 | 388 | 610 | **389** | **608** | | | 224 | 247 | 959 | **247** | **957** | | |
| 525.x264_r | 224 | **267** | **1470** | 266 | 1470 | | | 224 | **267** | **1470** | 266 | 1470 | | |
| 531.deepsjeng_r | 224 | **396** | **649** | 395 | 650 | | | 224 | 395 | 649 | **396** | **649** | | |
| 541.leela_r | 224 | 547 | 678 | **548** | **677** | | | 224 | **545** | **680** | 537 | 691 | | |
| 548.exchange2_r | 224 | **351** | **1670** | 351 | 1670 | | | 224 | **350** | **1670** | 350 | 1680 | | |
| 557.xz_r | 224 | **554** | **436** | 554 | 437 | | | 224 | **554** | **436** | 554 | 437 | | |

**SPECrate®2017_int_base = 683**

**SPECrate®2017_int_peak = 743**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
```

## Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

## Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.
```

**(Continued on next page)**

## Operating System Notes (Continued)

```
Scaling_Governor set to Performance

To enable Transparent Hugepages (THP) only on request for base runs,
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled' run as root.
To enable THP for all allocations for peak runs,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
```

## Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
     "/home/CPU2017/amd_rate_aocc320_milanx_A_lib/lib;/home/CPU2017/amd_rate_
     aocc320_milanx_A_lib/lib32:"
MALLOC_CONF = "retain:true"

Environment variables set by runcpu during the 523.xalancbmk_r peak run:
MALLOC_CONF = "thp:never"
```

## General Notes

```
Binaries were compiled on a system with 2x AMD EPYC 7742 CPU + 1TiB Memory using OpenSUSE 15.2

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v4.8.2 in RHEL 7.4 (No options specified)
jemalloc 5.1.0 is available here:
https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2
```

## Platform Notes

```
 BIOS configuration:
 SVM Mode = disable
 DRAM Scrub time = disable
 NUMA nodes per socket = NPS4
 APBDIS = 1
```

**(Continued on next page)**

## Platform Notes (Continued)

```
Sysinfo program /home/CPU2017/bin/sysinfo
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d
running on localhost.localdomain Tue Jul 26 18:42:35 2022

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
   https://www.spec.org/cpu2017/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : AMD EPYC 7663 56-Core Processor
      2  "physical id"s (chips)
      224 "processors"
   cores, siblings (Caution: counting these is hw and system dependent. The following
   excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
      cpu cores : 56
      siblings  : 112
      physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
      28 29 30 32 33 34 35 36 37 38 40 41 42 43 44 45 46 48 49 50 51 52 53 54 56 57 58 59
      60 61 62
      physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
      28 29 30 32 33 34 35 36 37 38 40 41 42 43 44 45 46 48 49 50 51 52 53 54 56 57 58 59
      60 61 62

From lscpu from util-linux 2.32.1:
     Architecture:        x86_64
     CPU op-mode(s):      32-bit, 64-bit
     Byte Order:          Little Endian
     CPU(s):              224
     On-line CPU(s) list: 0-223
     Thread(s) per core:  2
     Core(s) per socket:  56
     Socket(s):           2
     NUMA node(s):        16
     Vendor ID:           AuthenticAMD
     CPU family:          25
     Model:               1
     Model name:          AMD EPYC 7663 56-Core Processor
     Stepping:            1
     CPU MHz:             2887.624
     CPU max MHz:         2000.0000
     CPU min MHz:         1500.0000
     BogoMIPS:            3992.51
     Virtualization:      AMD-V
     L1d cache:           32K
     L1i cache:           32K
     L2 cache:            512K
```

**(Continued on next page)**

## Platform Notes (Continued)

```
      L3 cache:              32768K
      NUMA node0 CPU(s):     0-6,112-118
      NUMA node1 CPU(s):     7-13,119-125
      NUMA node2 CPU(s):     14-20,126-132
      NUMA node3 CPU(s):     21-27,133-139
      NUMA node4 CPU(s):     28-34,140-146
      NUMA node5 CPU(s):     35-41,147-153
      NUMA node6 CPU(s):     42-48,154-160
      NUMA node7 CPU(s):     49-55,161-167
      NUMA node8 CPU(s):     56-62,168-174
      NUMA node9 CPU(s):     63-69,175-181
      NUMA node10 CPU(s):    70-76,182-188
      NUMA node11 CPU(s):    77-83,189-195
      NUMA node12 CPU(s):    84-90,196-202
      NUMA node13 CPU(s):    91-97,203-209
      NUMA node14 CPU(s):    98-104,210-216
      NUMA node15 CPU(s):    105-111,217-223
      Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
      pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
      constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf pni pclmulqdq
      monitor ssse3 fma cx16 pcid sse4_1 sse4_2 movbe popcnt aes xsave avx f16c rdrand
      lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw
      ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb
      cat_l3 cdp_l3 invpcid_single hw_pstate sme ssbd mba sev ibrs ibpb stibp vmmcall
      fsgsbase bmi1 avx2 smep bmi2 invpcid cqm rdt_a rdseed adx smap clflushopt clwb
      sha_ni xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
      cqm_mbm_local clzero irperf xsaveerptr wbnoinvd amd_ppin arat npt lbrv svm_lock
      nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold
      v_vmsave_vmload vgif umip pku ospke vaes vpclmulqdq rdpid overflow_recov succor smca

  /proc/cpuinfo cache data
     cache size : 512 KB

  From numactl --hardware
  WARNING: a numactl 'node' might or might not correspond to a physical chip.
    available: 16 nodes (0-15)
    node 0 cpus: 0 1 2 3 4 5 6 112 113 114 115 116 117 118
    node 0 size: 64242 MB
    node 0 free: 64079 MB
    node 1 cpus: 7 8 9 10 11 12 13 119 120 121 122 123 124 125
    node 1 size: 64428 MB
    node 1 free: 64302 MB
    node 2 cpus: 14 15 16 17 18 19 20 126 127 128 129 130 131 132
    node 2 size: 64458 MB
    node 2 free: 64258 MB
    node 3 cpus: 21 22 23 24 25 26 27 133 134 135 136 137 138 139
    node 3 size: 64432 MB
```

**(Continued on next page)**

## Platform Notes (Continued)

```
node 3 free: 64246 MB
node 4 cpus: 28 29 30 31 32 33 34 140 141 142 143 144 145 146
node 4 size: 64456 MB
node 4 free: 64323 MB
node 5 cpus: 35 36 37 38 39 40 41 147 148 149 150 151 152 153
node 5 size: 64434 MB
node 5 free: 64293 MB
node 6 cpus: 42 43 44 45 46 47 48 154 155 156 157 158 159 160
node 6 size: 64448 MB
node 6 free: 64309 MB
node 7 cpus: 49 50 51 52 53 54 55 161 162 163 164 165 166 167
node 7 size: 64418 MB
node 7 free: 64301 MB
node 8 cpus: 56 57 58 59 60 61 62 168 169 170 171 172 173 174
node 8 size: 64428 MB
node 8 free: 64307 MB
node 9 cpus: 63 64 65 66 67 68 69 175 176 177 178 179 180 181
node 9 size: 64442 MB
node 9 free: 64317 MB
node 10 cpus: 70 71 72 73 74 75 76 182 183 184 185 186 187 188
node 10 size: 64472 MB
node 10 free: 64305 MB
node 11 cpus: 77 78 79 80 81 82 83 189 190 191 192 193 194 195
node 11 size: 64458 MB
node 11 free: 64313 MB
node 12 cpus: 84 85 86 87 88 89 90 196 197 198 199 200 201 202
node 12 size: 64440 MB
node 12 free: 64323 MB
node 13 cpus: 91 92 93 94 95 96 97 203 204 205 206 207 208 209
node 13 size: 64464 MB
node 13 free: 64322 MB
node 14 cpus: 98 99 100 101 102 103 104 210 211 212 213 214 215 216
node 14 size: 64480 MB
node 14 free: 64304 MB
node 15 cpus: 105 106 107 108 109 110 111 217 218 219 220 221 222 223
node 15 size: 64429 MB
node 15 free: 64278 MB
node distances:
node   0   1   2   3   4   5   6   7   8   9  10  11  12  13  14  15
  0:  10  11  12  12  12  12  12  12  32  32  32  32  32  32  32  32
  1:  11  10  12  12  12  12  12  12  32  32  32  32  32  32  32  32
  2:  12  12  10  11  12  12  12  12  32  32  32  32  32  32  32  32
  3:  12  12  11  10  12  12  12  12  32  32  32  32  32  32  32  32
  4:  12  12  12  12  10  11  12  12  32  32  32  32  32  32  32  32
  5:  12  12  12  12  11  10  12  12  32  32  32  32  32  32  32  32
  6:  12  12  12  12  12  12  10  11  32  32  32  32  32  32  32  32
  7:  12  12  12  12  12  12  11  10  32  32  32  32  32  32  32  32
```

**(Continued on next page)**

## Platform Notes (Continued)

```
     8:  32  32  32  32  32  32  32  32  10  11  12  12  12  12  12  12
     9:  32  32  32  32  32  32  32  32  11  10  12  12  12  12  12  12
    10:  32  32  32  32  32  32  32  32  12  12  10  11  12  12  12  12
    11:  32  32  32  32  32  32  32  32  12  12  11  10  12  12  12  12
    12:  32  32  32  32  32  32  32  32  12  12  12  12  10  11  12  12
    13:  32  32  32  32  32  32  32  32  12  12  12  12  11  10  12  12
    14:  32  32  32  32  32  32  32  32  12  12  12  12  12  12  10  11
    15:  32  32  32  32  32  32  32  32  12  12  12  12  12  12  11  10

From /proc/meminfo
   MemTotal:       1056648192 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

/sbin/tuned-adm active
    Current active profile: throughput-performance

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
   performance

From /etc/*release* /etc/*version*
   os-release:
      NAME="Red Hat Enterprise Linux"
      VERSION="8.3 (Ootpa)"
      ID="rhel"
      ID_LIKE="fedora"
      VERSION_ID="8.3"
      PLATFORM_ID="platform:el8"
      PRETTY_NAME="Red Hat Enterprise Linux 8.3 (Ootpa)"
      ANSI_COLOR="0;31"
   redhat-release: Red Hat Enterprise Linux release 8.3 (Ootpa)
   system-release: Red Hat Enterprise Linux release 8.3 (Ootpa)
   system-release-cpe: cpe:/o:redhat:enterprise_linux:8.3:ga

uname -a:
   Linux localhost.localdomain 4.18.0-240.el8.x86_64 #1 SMP Wed Sep 23 05:13:10 EDT 2020
   x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):                    Not affected
CVE-2018-3620 (L1 Terminal Fault):                 Not affected
Microarchitectural Data Sampling:                  Not affected
CVE-2017-5754 (Meltdown):                          Not affected
CVE-2018-3639 (Speculative Store Bypass):          Mitigation: Speculative Store
                                                   Bypass disabled via prctl and
                                                   seccomp
```

**(Continued on next page)**

## Platform Notes (Continued)

```
 CVE-2017-5753 (Spectre variant 1):                    Mitigation: usercopy/swapgs
                                                       barriers and __user pointer
                                                       sanitization
 CVE-2017-5715 (Spectre variant 2):                    Mitigation: Full AMD retpoline,
                                                     IBPB: conditional, IBRS_FW, STIBP:
                                                       always-on, RSB filling
 CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected
 CVE-2019-11135 (TSX Asynchronous Abort):              Not affected

 run-level 3 Jul 21 15:07

 SPEC is set to: /home/CPU2017
    Filesystem            Type  Size  Used Avail Use% Mounted on
    /dev/mapper/rhel-home xfs   372G  8.7G  363G   3% /home

 From /sys/devices/virtual/dmi/id
     Vendor:         Inspur
     Product:        NF5280A6
     Product Family: Not specified
     Serial:         200857231

 Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you
 interpret this section. The 'dmidecode' program reads system data which is "intended to
 allow hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   Memory:
     32x Samsung M393A4K40EB3-CWE 32 GB 2 rank 3200

 BIOS:
    BIOS Vendor:       American Megatrends Inc.
    BIOS Version:      7.00.04
    BIOS Date:         05/19/2022

 (End of data from sysinfo program)
```

## Compiler Version Notes

```
==============================================================================
C       | 502.gcc_r(peak)
------------------------------------------------------------------------------
AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on
  LLVM Mirror.Version.13.0.0)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
------------------------------------------------------------------------------
```

**(Continued on next page)**

## Compiler Version Notes (Continued)

```
==============================================================================
C       | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak)
        | 525.x264_r(base, peak) 557.xz_r(base, peak)
------------------------------------------------------------------------------
AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on
  LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
------------------------------------------------------------------------------

==============================================================================
C       | 502.gcc_r(peak)
------------------------------------------------------------------------------
AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on
  LLVM Mirror.Version.13.0.0)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
------------------------------------------------------------------------------

==============================================================================
C       | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak)
        | 525.x264_r(base, peak) 557.xz_r(base, peak)
------------------------------------------------------------------------------
AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on
  LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
------------------------------------------------------------------------------

==============================================================================
C++     | 523.xalancbmk_r(peak)
------------------------------------------------------------------------------
AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on
  LLVM Mirror.Version.13.0.0)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
------------------------------------------------------------------------------

==============================================================================
C++     | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base)
        | 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)
------------------------------------------------------------------------------
```

**(Continued on next page)**

## Compiler Version Notes (Continued)

```
AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on
  LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
------------------------------------------------------------------------------

==============================================================================
C++     | 523.xalancbmk_r(peak)
------------------------------------------------------------------------------
AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on
  LLVM Mirror.Version.13.0.0)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
------------------------------------------------------------------------------

==============================================================================
C++     | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base)
        | 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)
------------------------------------------------------------------------------
AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on
  LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
------------------------------------------------------------------------------

==============================================================================
Fortran | 548.exchange2_r(base, peak)
------------------------------------------------------------------------------
AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on
  LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
------------------------------------------------------------------------------
```

## Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

**(Continued on next page)**

## Base Compiler Invocation (Continued)

Fortran benchmarks:
flang

## Base Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

## Base Optimization Flags

C benchmarks:
-m64 -Wl,-allow-multiple-definition -Wl,-mllvm -Wl,-enable-licm-vrp
-flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-loop-fusion -O3 -march=znver3 -fveclib=AMDLIBM
-ffast-math -fstruct-layout=5 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays
-mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -enable-loop-fusion -z muldefs -lamdlibm -ljemalloc -lflang

C++ benchmarks:
-m64 -std=c++98 -flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-loop-fusion -O3 -march=znver3 -fveclib=AMDLIBM
-ffast-math -mllvm -enable-partial-unswitch
-mllvm -unroll-threshold=100 -finline-aggressive
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch

**(Continued on next page)**

## Base Optimization Flags (Continued)

C++ benchmarks (continued):
-mllvm -extra-vectorizer-passes -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -convert-pow-exp-to-int=false
-mllvm -enable-loop-fusion -z muldefs -fvirtual-function-elimination
-fvisibility=hidden -lamdlibm -ljemalloc -lflang

Fortran benchmarks:
-m64 -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -Wl,-mllvm -Wl,-enable-iv-split
-flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-loop-fusion -O3 -march=znver3 -fveclib=AMDLIBM
-ffast-math -z muldefs -mllvm -unroll-aggressive
-mllvm -unroll-threshold=500 -lamdlibm -ljemalloc -lflang

## Base Other Flags

C benchmarks:
-Wno-unused-command-line-argument

C++ benchmarks:
-Wno-unused-command-line-argument

## Peak Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

## Peak Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64

**(Continued on next page)**

## Peak Portability Flags (Continued)

502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

## Peak Optimization Flags

C benchmarks:

500.perlbench_r: -m64 -Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-fprofile-instr-generate(pass 1)
-fprofile-instr-use(pass 2) -Ofast -march=znver3
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays
-flv-function-specialization -mllvm -inline-threshold=1000
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=false
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -lamdlibm -ljemalloc

502.gcc_r: -m32 -Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize -Ofast -march=znver3
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays
-flv-function-specialization -mllvm -inline-threshold=1000
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -fgnu89-inline
-ljemalloc

505.mcf_r: -m64 -Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast

**(Continued on next page)**

# Peak Optimization Flags (Continued)

505.mcf_r (continued):
-march=znver3 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -lamdlibm -ljemalloc

525.x264_r: basepeak = yes

557.xz_r: basepeak = yes

C++ benchmarks:

520.omnetpp_r: basepeak = yes

523.xalancbmk_r: -m32 -Wl,-mllvm -Wl,-do-block-reorder=aggressive -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math
-finline-aggressive -mllvm -unroll-threshold=100
-flv-function-specialization -mllvm -enable-licm-vrp
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true
-mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden
-ljemalloc

531.deepsjeng_r: -m64 -std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math
-finline-aggressive -mllvm -unroll-threshold=100
-flv-function-specialization -mllvm -enable-licm-vrp
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true
-fvirtual-function-elimination -fvisibility=hidden
-lamdlibm -ljemalloc

541.leela_r: Same as 531.deepsjeng_r

**(Continued on next page)**

## Peak Optimization Flags (Continued)

Fortran benchmarks:
-m64 -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -Wl,-mllvm -Wl,-enable-iv-split
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -mllvm -unroll-aggressive
-mllvm -unroll-threshold=500 -lamdlibm -ljemalloc -lflang

## Peak Other Flags

C benchmarks (except as noted below):
-Wno-unused-command-line-argument

502.gcc_r: -L/usr/lib -Wno-unused-command-line-argument
-L/sppo/bin/cpu2017v118-aocc3-milanX/amd_rate_aocc320_milanx_A_lib/lib32

C++ benchmarks (except as noted below):
-Wno-unused-command-line-argument

523.xalancbmk_r: -L/usr/lib -Wno-unused-command-line-argument
-L/sppo/bin/cpu2017v118-aocc3-milanX/amd_rate_aocc320_milanx_A_lib/lib32

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/aocc320-flags-A1.html
http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-amd-V1.3.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/aocc320-flags-A1.xml
http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-amd-V1.3.xml


SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.


For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2022-07-26 18:42:35-0400.
Report generated on 2022-08-16 13:55:45 by CPU2017 PS formatter v6442.
Originally published on 2022-08-16.