SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11
(2.25 GHz, AMD EPYC 9754)

SPECrate®2026_fp_base = 666

SPECrate®2026_fp_peak = 666

CPU2026 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2026
Hardware Availability: Jun-2023
Software Availability: Jan-2026

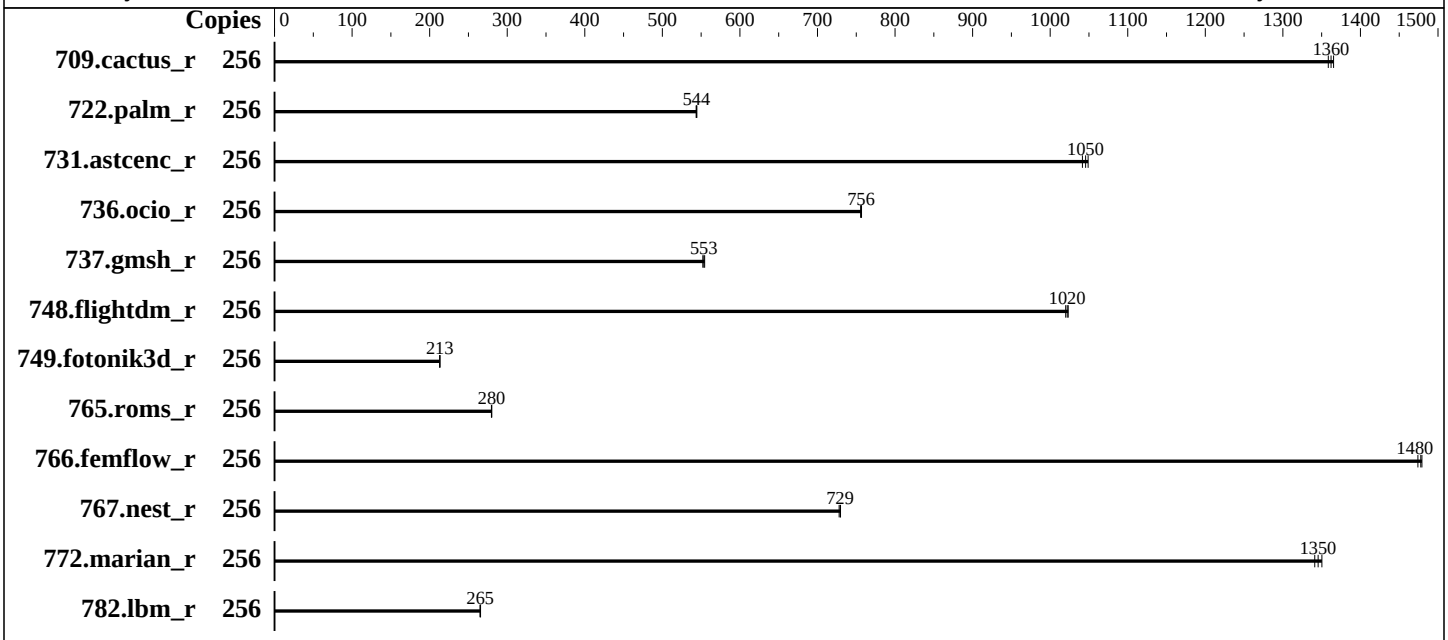

Hardware

CPU Name:	AMD EPYC 9754
Max MHz:	3100
Nominal:	2250
Enabled:	256 cores, 2 chips
Orderable:	1,2 chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	256 MB I+D on chip per chip, 16 MB shared / 8 cores
Other:	None
Memory:	1536 GB (24 x 64 GB 2Rx4 PC5-4800B-R)
Storage:	1 x 480 GB NVMe SSD
Cooling:	DLC
Other:	None

Software

OS:	Ubuntu 24.04.3 LTS Kernel 6.8.0-90-generic
Compiler:	C/C++/Fortran: Version 5.1.0 of AOCC
Compiler Category:	Vendor
Firmware:	HPE BIOS Version v2.90 released Jan-2026
File System:	ext4
System State:	Run level 5 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	None
Power Management:	BIOS and OS is set to prefer performance at the cost of additional power usage

SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise
(Test Sponsor: HPE)
ProLiant DL385 Gen11
(2.25 GHz, AMD EPYC 9754)

SPECrate®2026_fp_base = 666

SPECrate®2026_fp_peak = 666

CPU2026 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2026
Hardware Availability: Jun-2023
Software Availability: Jan-2026

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
709.cactus_r	256	162	1360	161	1370	**161**	**1360**	256	162	1360	161	1370	**161**	**1360**
722.palm_r	256	**621**	**544**	622	544	621	544	256	**621**	**544**	622	544	621	544
731.astcenc_r	256	205	1050	206	1040	**206**	**1050**	256	205	1050	206	1040	**206**	**1050**
736.ocio_r	256	296	757	296	756	**296**	**756**	256	296	757	296	756	**296**	**756**
737.gmsh_r	256	**212**	**553**	213	552	212	555	256	**212**	**553**	213	552	212	555
748.flightdm_r	256	179	1020	180	1020	**179**	**1020**	256	179	1020	180	1020	**179**	**1020**
749.fotonik3d_r	256	1388	213	1390	213	**1389**	**213**	256	1388	213	1390	213	**1389**	**213**
765.roms_r	256	1440	280	1442	280	**1441**	**280**	256	1440	280	1442	280	**1441**	**280**
766.femflow_r	256	255	1470	254	1480	**254**	**1480**	256	255	1470	254	1480	**254**	**1480**
767.nest_r	256	**278**	**729**	279	728	278	730	256	**278**	**729**	279	728	278	730
772.marian_r	256	299	1350	**300**	**1350**	301	1340	256	299	1350	**300**	**1350**	301	1340
782.lbm_r	256	**553**	**265**	552	266	554	265	256	**553**	**265**	552	266	554	265

SPECrate®2026_fp_base = 666

SPECrate®2026_fp_peak = 666

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
```

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
```

(Continued on next page)

Operating System Notes (Continued)

```
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.
To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
     "/home/cpu2026/amd_rate_aocc510_znver5_A_lib/lib:/home/cpu2026/amd_rate_
     aocc510_znver5_A_lib/lib32:"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries were compiled on a system with 2x AMD EPYC Venice256 CPU + 2TiB
Memory using Ubuntu 24.04
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
```

Platform Notes

```
BIOS Configurations : Parameters are selected in the order shown below
Workload Profile set to General Throughput Compute
Determinism Control set to Manual
 Performance Determinism set to Power Deterministic
AMD SMT Option set to Disabled
ACPI CST C2 Latency set to 18 microseconds
NUMA memory domains per socket set to Four memory domains per socket
Thermal Configuration set to Maximum Cooling
Data Fabric C-State Enable set to Force Enabled
Last-Level Cache (LLC) as NUMA Node set to Enabled
Workload Profile set to Custom
 Power Regulator set to OS Control Mode
 L2 HW Prefetcher set to Disabled

 Sysinfo program /home/cpu2026/bin/sysinfo
 Rev: 069f95da7e7f5d81b2ce48a82150e54f
```

(Continued on next page)

Platform Notes (Continued)

```
running on admin1 Mon Feb  2 12:13:07 2026

SUT (System Under Test) info as seen by some common utilities.

------------------------------------------------------------
Table of contents
------------------------------------------------------------
 1. uname -srvm
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 255 (255.4-1ubuntu8.12)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS
------------------------------------------------------------

------------------------------------------------------------
1. uname -srvm
  Linux 6.8.0-90-generic #91-Ubuntu SMP PREEMPT_DYNAMIC Tue Nov 18 14:14:30 UTC 2025 x86_64

------------------------------------------------------------
2. w
   12:13:07 up 3 min,  5 users,  load average: 0.55, 0.20, 0.07
  USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU  WHAT
  admin1            10.30.195.96     12:12    3:34   0.00s  0.03s sshd: admin1 [priv]
  admin1            10.30.195.96     12:12    3:34   0.00s  0.02s sshd: admin1 [priv]
  admin1            10.30.195.96     12:12    3:35   0.00s  0.02s sshd: admin1 [priv]
  admin1            10.30.195.96     12:12    3:35   0.00s  0.03s sshd: admin1 [priv]
  admin1            10.30.195.94     12:10    3:35   0.00s  0.05s sshd: admin1 [priv]

------------------------------------------------------------
```

(Continued on next page)

Platform Notes (Continued)

```
 3. Username
   From environment variable $USER:  root
   From the command 'logname':       admin1

------------------------------------------------------------
 4. ulimit -a
   time(seconds)        unlimited
   file(blocks)         unlimited
   data(kbytes)         unlimited
   stack(kbytes)        unlimited
   coredump(blocks)     0
   memory(kbytes)       unlimited
   locked memory(kbytes) 2097152
   process              6190765
   nofiles              1024
   vmemory(kbytes)      unlimited
   locks                unlimited
   rtprio               0

------------------------------------------------------------
 5. sysinfo process ancestry
  /sbin/init
  sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
  sshd: admin1 [priv]
  sshd: admin1@notty
  sudo $SPEC/fprate.sh
  /bin/bash $SPEC/fprate.sh
  sudo ./run_amd_rate_aocc510_znver5_A1.py
  python3 ./run_amd_rate_aocc510_znver5_A1.py
  /bin/bash ./amd_rate_aocc510_znver5_A1.sh
  runcpu --config amd_rate_aocc510_znver5_A1.cfg --tune base --reportable --iterations 3 fprate
  runcpu --configfile amd_rate_aocc510_znver5_A1.cfg --tune base --reportable --iterations 3 --nopower
    --runmode rate --tune base --size test:train:refrate fprate --nopreenv --note-preenv --logfile
    $SPEC/tmp/CPU2026.001/templogs/preenv.fprate.001.0.log --lognum 001.0 --from_runcpu 2
  specperl $SPEC/bin/sysinfo
 $SPEC = /home/cpu2026

------------------------------------------------------------
 6. /proc/cpuinfo
     model name      : AMD EPYC 9754 128-Core Processor
     vendor_id       : AuthenticAMD
     cpu family      : 25
     model           : 160
     stepping        : 1
     microcode       : 0xaa00116
     bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass srso vmscape
     TLB size        : 3584 4K pages
```

(Continued on next page)

Platform Notes (Continued)

```
     cpu cores       : 128
     siblings        : 128
     2 physical ids (chips)
     256 processors (hardware threads)
     physical id 0: core ids
    0-7,16-23,32-39,48-55,64-71,80-87,96-103,112-119,128-135,144-151,160-167,176-183,192-199,208-215,224-231,
     240-247
     physical id 1: core ids
    0-7,16-23,32-39,48-55,64-71,80-87,96-103,112-119,128-135,144-151,160-167,176-183,192-199,208-215,224-231,
     240-247
     physical id 0: apicids
    0-7,16-23,32-39,48-55,64-71,80-87,96-103,112-119,128-135,144-151,160-167,176-183,192-199,208-215,224-231,
     240-247
     physical id 1: apicids
    256-263,272-279,288-295,304-311,320-327,336-343,352-359,368-375,384-391,400-407,416-423,432-439,448-455,4
     64-471,480-487,496-503
   Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
    virtualized systems.  Use the above data carefully.

 ------------------------------------------------------------
 7. lscpu

 From lscpu from util-linux 2.39.3:
   Architecture:                         x86_64
   CPU op-mode(s):                       32-bit, 64-bit
   Address sizes:                        52 bits physical, 57 bits virtual
   Byte Order:                           Little Endian
   CPU(s):                               256
   On-line CPU(s) list:                  0-255
   Vendor ID:                            AuthenticAMD
   BIOS Vendor ID:                       Advanced Micro Devices, Inc.
   Model name:                           AMD EPYC 9754 128-Core Processor
   BIOS Model name:                    AMD EPYC 9754 128-Core Processor                CPU @ 2.2GHz
   BIOS CPU family:                      107
   CPU family:                           25
   Model:                                160
   Thread(s) per core:                   1
   Core(s) per socket:                   128
   Socket(s):                            2
   Stepping:                             1
   Frequency boost:                      enabled
   CPU(s) scaling MHz:                   100%
   CPU max MHz:                          2250.0000
   CPU min MHz:                          1500.0000
   BogoMIPS:                             4493.33
   Flags:                              fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                                       pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
```

(Continued on next page)

Platform Notes (Continued)

```
                    rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
                  extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
                   sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
                  cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
                     osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
                    perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
                    ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase bmi1 avx2 smep bmi2
                    erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
                    clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
                    xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                     user_shstk avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd
                  amd_ppin cppc amd_ibpb_ret arat npt lbrv svm_lock nrip_save tsc_scale
                    vmcb_clean flushbyasid decodeassists pausefilter pfthreshold avic
                    v_vmsave_vmload vgif x2avic v_spec_ctrl vnmi avx512vbmi umip pku
                    ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                  avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_l1d
                            debug_swap ibpb_exit_to_user
Virtualization:             AMD-V
L1d cache:                  8 MiB (256 instances)
L1i cache:                  8 MiB (256 instances)
L2 cache:                   256 MiB (256 instances)
L3 cache:                   512 MiB (32 instances)
NUMA node(s):               32
NUMA node0 CPU(s):          0-7
NUMA node1 CPU(s):          8-15
NUMA node2 CPU(s):          16-23
NUMA node3 CPU(s):          24-31
NUMA node4 CPU(s):          32-39
NUMA node5 CPU(s):          40-47
NUMA node6 CPU(s):          48-55
NUMA node7 CPU(s):          56-63
NUMA node8 CPU(s):          64-71
NUMA node9 CPU(s):          72-79
NUMA node10 CPU(s):         80-87
NUMA node11 CPU(s):         88-95
NUMA node12 CPU(s):         96-103
NUMA node13 CPU(s):         104-111
NUMA node14 CPU(s):         112-119
NUMA node15 CPU(s):         120-127
NUMA node16 CPU(s):         128-135
NUMA node17 CPU(s):         136-143
NUMA node18 CPU(s):         144-151
NUMA node19 CPU(s):         152-159
NUMA node20 CPU(s):         160-167
NUMA node21 CPU(s):         168-175
NUMA node22 CPU(s):         176-183
NUMA node23 CPU(s):         184-191
```

(Continued on next page)

Platform Notes (Continued)

```
   NUMA node24 CPU(s):                   192-199
   NUMA node25 CPU(s):                   200-207
   NUMA node26 CPU(s):                   208-215
   NUMA node27 CPU(s):                   216-223
   NUMA node28 CPU(s):                   224-231
   NUMA node29 CPU(s):                   232-239
   NUMA node30 CPU(s):                   240-247
   NUMA node31 CPU(s):                   248-255
   Vulnerability Gather data sampling:   Not affected
   Vulnerability Itlb multihit:          Not affected
   Vulnerability L1tf:                   Not affected
   Vulnerability Mds:                    Not affected
   Vulnerability Meltdown:               Not affected
   Vulnerability Mmio stale data:        Not affected
   Vulnerability Reg file data sampling: Not affected
   Vulnerability Retbleed:               Not affected
   Vulnerability Spec rstack overflow:   Mitigation; Safe RET
   Vulnerability Spec store bypass:      Mitigation; Speculative Store Bypass disabled via prctl
   Vulnerability Spectre v1:             Mitigation; usercopy/swapgs barriers and __user pointer sanitization
   Vulnerability Spectre v2:             Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
                                         disabled; RSB filling; PBRSB-eIBRS Not affected; BHI Not affected
   Vulnerability Srbds:                  Not affected
   Vulnerability Tsx async abort:        Not affected
   Vulnerability Vmscape:                Mitigation; IBPB before exit to userspace

 From lscpu --cache:
      NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL  SETS PHY-LINE COHERENCY-SIZE
      L1d       32K       8M    8 Data            1    64        1             64
      L1i       32K       8M    8 Instruction     1    64        1             64
      L2         1M     256M    8 Unified         2  2048        1             64
      L3        16M     512M   16 Unified         3 16384        1             64

 ------------------------------------------------------------
 8. numactl --hardware
 NOTE: a numactl 'node' might or might not correspond to a physical chip.
   available: 32 nodes (0-31)
   node 0 cpus: 0-7
   node 0 size: 48065 MB
   node 0 free: 47824 MB
   node 1 cpus: 8-15
   node 1 size: 48381 MB
   node 1 free: 48221 MB
   node 2 cpus: 16-23
   node 2 size: 48381 MB
   node 2 free: 48256 MB
   node 3 cpus: 24-31
   node 3 size: 48381 MB
```

(Continued on next page)

Platform Notes (Continued)

```
node 3 free: 47977 MB
node 4 cpus: 32-39
node 4 size: 48381 MB
node 4 free: 48233 MB
node 5 cpus: 40-47
node 5 size: 48381 MB
node 5 free: 48271 MB
node 6 cpus: 48-55
node 6 size: 48381 MB
node 6 free: 48234 MB
node 7 cpus: 56-63
node 7 size: 48337 MB
node 7 free: 48218 MB
node 8 cpus: 64-71
node 8 size: 48381 MB
node 8 free: 48254 MB
node 9 cpus: 72-79
node 9 size: 48381 MB
node 9 free: 48248 MB
node 10 cpus: 80-87
node 10 size: 48381 MB
node 10 free: 48259 MB
node 11 cpus: 88-95
node 11 size: 48381 MB
node 11 free: 48230 MB
node 12 cpus: 96-103
node 12 size: 48381 MB
node 12 free: 48263 MB
node 13 cpus: 104-111
node 13 size: 48381 MB
node 13 free: 48253 MB
node 14 cpus: 112-119
node 14 size: 48381 MB
node 14 free: 48259 MB
node 15 cpus: 120-127
node 15 size: 48381 MB
node 15 free: 48257 MB
node 16 cpus: 128-135
node 16 size: 48381 MB
node 16 free: 48256 MB
node 17 cpus: 136-143
node 17 size: 48381 MB
node 17 free: 48272 MB
node 18 cpus: 144-151
node 18 size: 48381 MB
node 18 free: 48268 MB
node 19 cpus: 152-159
```

(Continued on next page)

Platform Notes (Continued)

```
   node 19 size: 48381 MB
   node 19 free: 48272 MB
   node 20 cpus: 160-167
   node 20 size: 48381 MB
   node 20 free: 48253 MB
   node 21 cpus: 168-175
   node 21 size: 48381 MB
   node 21 free: 48272 MB
   node 22 cpus: 176-183
   node 22 size: 48381 MB
   node 22 free: 48259 MB
   node 23 cpus: 184-191
   node 23 size: 48381 MB
   node 23 free: 48230 MB
   node 24 cpus: 192-199
   node 24 size: 48381 MB
   node 24 free: 48246 MB
   node 25 cpus: 200-207
   node 25 size: 48381 MB
   node 25 free: 48263 MB
   node 26 cpus: 208-215
   node 26 size: 48381 MB
   node 26 free: 48255 MB
   node 27 cpus: 216-223
   node 27 size: 48381 MB
   node 27 free: 48264 MB
   node 28 cpus: 224-231
   node 28 size: 48381 MB
   node 28 free: 48197 MB
   node 29 cpus: 232-239
   node 29 size: 48381 MB
   node 29 free: 48215 MB
   node 30 cpus: 240-247
   node 30 size: 48381 MB
   node 30 free: 48263 MB
   node 31 cpus: 248-255
   node 31 size: 48315 MB
   node 31 free: 48159 MB
   node distances:
  node   0   1   2   3   4   5   6   7   8   9  10  11  12  13  14  15  16  17  18  19  20  21  22  23  24
  25  26  27  28  29  30  31
    0:  10  11  11  11  12  12  12  12  12  12  12  12  12  12  12  12  32  32  32  32  32  32  32  32  32
     32  32  32  32  32  32  32
    1:  11  10  11  11  12  12  12  12  12  12  12  12  12  12  12  12  32  32  32  32  32  32  32  32  32
     32  32  32  32  32  32  32
    2:  11  11  10  11  12  12  12  12  12  12  12  12  12  12  12  12  32  32  32  32  32  32  32  32  32
     32  32  32  32  32  32  32
```

(Continued on next page)

Platform Notes (Continued)

```
  3:  11  11  11  10  12  12  12  12  12  12  12  12  12  12  12  12  32  32  32  32  32  32  32  32  32
      32  32  32  32  32  32  32
  4:  12  12  12  12  10  11  11  11  12  12  12  12  12  12  12  12  32  32  32  32  32  32  32  32  32
      32  32  32  32  32  32  32
  5:  12  12  12  12  11  10  11  11  12  12  12  12  12  12  12  12  32  32  32  32  32  32  32  32  32
      32  32  32  32  32  32  32
  6:  12  12  12  12  11  11  10  11  12  12  12  12  12  12  12  12  32  32  32  32  32  32  32  32  32
      32  32  32  32  32  32  32
  7:  12  12  12  12  11  11  11  10  12  12  12  12  12  12  12  12  32  32  32  32  32  32  32  32  32
      32  32  32  32  32  32  32
  8:  12  12  12  12  12  12  12  12  10  11  11  11  12  12  12  12  32  32  32  32  32  32  32  32  32
      32  32  32  32  32  32  32
  9:  12  12  12  12  12  12  12  12  11  10  11  11  12  12  12  12  32  32  32  32  32  32  32  32  32
      32  32  32  32  32  32  32
 10:  12  12  12  12  12  12  12  12  11  11  10  11  12  12  12  12  32  32  32  32  32  32  32  32  32
      32  32  32  32  32  32  32
 11:  12  12  12  12  12  12  12  12  11  11  11  10  12  12  12  12  32  32  32  32  32  32  32  32  32
      32  32  32  32  32  32  32
 12:  12  12  12  12  12  12  12  12  12  12  12  12  10  11  11  11  32  32  32  32  32  32  32  32  32
      32  32  32  32  32  32  32
 13:  12  12  12  12  12  12  12  12  12  12  12  12  11  10  11  11  32  32  32  32  32  32  32  32  32
      32  32  32  32  32  32  32
 14:  12  12  12  12  12  12  12  12  12  12  12  12  11  11  10  11  32  32  32  32  32  32  32  32  32
      32  32  32  32  32  32  32
 15:  12  12  12  12  12  12  12  12  12  12  12  12  11  11  11  10  32  32  32  32  32  32  32  32  32
      32  32  32  32  32  32  32
 16:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  10  11  11  11  12  12  12  12  12
      12  12  12  12  12  12  12
 17:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  11  10  11  11  12  12  12  12  12
      12  12  12  12  12  12  12
 18:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  11  11  10  11  12  12  12  12  12
      12  12  12  12  12  12  12
 19:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  11  11  11  10  12  12  12  12  12
      12  12  12  12  12  12  12
 20:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12  10  11  11  11  12
      12  12  12  12  12  12  12
 21:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12  11  10  11  11  12
      12  12  12  12  12  12  12
 22:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12  11  11  10  11  12
      12  12  12  12  12  12  12
 23:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12  11  11  11  10  12
      12  12  12  12  12  12  12
 24:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12  12  12  12  12  10
      11  11  11  12  12  12  12
 25:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12  12  12  12  12  11
      10  11  11  12  12  12  12
 26:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12  12  12  12  12  11
```

(Continued on next page)

Platform Notes (Continued)

```
    11  10  11  12  12  12  12
   27:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12  12  12  12  12  11
    11  11  10  12  12  12  12
   28:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12  12  12  12  12  12
    12  12  12  10  11  11  11
   29:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12  12  12  12  12  12
    12  12  12  11  10  11  11
   30:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12  12  12  12  12  12
    12  12  12  11  11  10  11
   31:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12  12  12  12  12  12
    12  12  12  11  11  11  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       1584917768 kB

------------------------------------------------------------
10. who -r
  run-level 5 Feb 2 12:09

------------------------------------------------------------
11. Systemd service manager version: systemd 255 (255.4-1ubuntu8.12)
  Default Target  Status
  graphical       running

------------------------------------------------------------
12. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          ModemManager apparmor apport blk-availability cloud-config cloud-final cloud-init
                   cloud-init-local console-setup cron dmesg e2scrub_reap finalrd getty@ gpu-manager
                     grub-common grub-initrd-fallback keyboard-setup lvm2-monitor multipathd
                   networkd-dispatcher open-iscsi open-vm-tools pollinate rsyslog secureboot-db setvtrgb
                     snapd sysstat systemd-networkd systemd-networkd-wait-online systemd-pstore
                   systemd-resolved thermald tuned ua-reboot-cmds ubuntu-advantage udisks2 ufw
                     unattended-upgrades vgauth
  enabled-runtime  netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
  disabled         console-getty debug-shell iscsid nftables rsync serial-getty@ ssh
                   systemd-boot-check-no-failures systemd-confext systemd-network-generator
                 systemd-networkd-wait-online@ systemd-pcrlock-file-system systemd-pcrlock-firmware-code
                 systemd-pcrlock-firmware-config systemd-pcrlock-machine-id systemd-pcrlock-make-policy
                 systemd-pcrlock-secureboot-authority systemd-pcrlock-secureboot-policy systemd-sysext
                     systemd-time-wait-sync systemd-timesyncd upower
  indirect         systemd-sysupdate systemd-sysupdate-reboot uuidd
  masked         cryptdisks cryptdisks-early hwclock multipath-tools-boot screen-cleanup sudo x11-common

------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
```

(Continued on next page)

Platform Notes (Continued)

```
  BOOT_IMAGE=/boot/vmlinuz-6.8.0-90-generic
  root=UUID=60685607-d408-4b5d-9478-a6a431e11442
  ro

------------------------------------------------------------
14. cpupower frequency-info
  analyzing CPU 226:
    current policy: frequency should be within 1.50 GHz and 2.25 GHz.
                    The governor "performance" may decide which speed to use
                    within this range.
    boost state support:
      Supported: yes
      Active: yes
      Boost States: 0
      Total States: 3
      Pstate-P0:  2250MHz

------------------------------------------------------------
15. tuned-adm active
  Current active profile: balanced

------------------------------------------------------------
16. sysctl
  kernel.numa_balancing               1
  kernel.randomize_va_space           0
  vm.compaction_proactiveness        20
  vm.dirty_background_bytes           0
  vm.dirty_background_ratio          10
  vm.dirty_bytes                      0
  vm.dirty_expire_centisecs        3000
  vm.dirty_ratio                      8
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                       1
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                1

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage
  defrag          [always] defer defer+madvise madvise never
  enabled         [always] madvise never
```

(Continued on next page)

Platform Notes (Continued)

```
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
18. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
19. OS release
  From /etc/*-release /etc/*-version
  os-release Ubuntu 24.04.3 LTS

------------------------------------------------------------
20. Disk information
SPEC is set to: /home/cpu2026
  Filesystem     Type  Size  Used Avail Use% Mounted on
  /dev/sda2      ext4  439G   53G  363G  13% /

------------------------------------------------------------
21. /sys/devices/virtual/dmi/id
    Vendor:         HPE
    Product:        ProLiant DL385 Gen11
    Product Family: ProLiant
    Serial:         DL385G11-003

------------------------------------------------------------
22. dmidecode
  Additional information from dmidecode 3.5 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
  "DMTF SMBIOS" standard.
  Memory:
    11x Hynix HMCG94AEBRA103N 64 GB 2 rank 4800
    1x Hynix HMCG94AEBRA109N 64 GB 2 rank 4800
    5x Hynix HMCG94AEBRA123N 64 GB 2 rank 4800
    7x Hynix HMCG94MEBRA121N 64 GB 2 rank 4800


------------------------------------------------------------
23. BIOS
(This section combines info from /sys/devices and dmidecode.)
```

(Continued on next page)

Platform Notes (Continued)

```
    BIOS Vendor:       HPE
    BIOS Version:      2.90
    BIOS Date:         01/09/2026
    BIOS Revision:     2.90
    Firmware Revision: 1.63
```

Compiler Version Notes

```
==============================================================================
C       | 782.lbm_r(base)
------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.1.0-Build#1994 2025_12_23)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin
------------------------------------------------------------------------------

==============================================================================
C++     | 731.astcenc_r(base) 736.ocio_r(base) 748.flightdm_r(base)
        | 766.femflow_r(base) 767.nest_r(base) 772.marian_r(base)
------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.1.0-Build#1994 2025_12_23)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin
------------------------------------------------------------------------------

==============================================================================
C++, C  | 709.cactus_r(base) 737.gmsh_r(base)
------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.1.0-Build#1994 2025_12_23)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin
------------------------------------------------------------------------------

==============================================================================
Fortran | 722.palm_r(base) 749.fotonik3d_r(base) 765.roms_r(base)
------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.1.0-Build#1994 2025_12_23)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Benchmarks using both C and C++:
clang++ clang

Base Portability Flags

709.cactus_r: -DSPEC_LP64
722.palm_r: -DSPEC_LP64
731.astcenc_r: -DSPEC_LP64
736.ocio_r: -fno-finite-math-only -DSPEC_LP64
737.gmsh_r: -fno-fast-math -DSPEC_LP64
748.flightdm_r: -fno-reciprocal-math -DSPEC_LP64
749.fotonik3d_r: -DSPEC_LP64
765.roms_r: -DSPEC_LP64
766.femflow_r: -DSPEC_LP64
767.nest_r: -fno-finite-math-only -DSPEC_LP64
772.marian_r: -DSPEC_LP64
782.lbm_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-m64 -std=c18 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather
-ffast-math -O3 -march=znver5 -fveclib=AMDLIBM -fno-PIE -no-pie
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang

C++ benchmarks:
-m64 -std=c++17 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3

(Continued on next page)

Base Optimization Flags (Continued)

C++ benchmarks (continued):
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-ffast-math -O3 -march=znver5 -fveclib=AMDLIBM -flto
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang

Fortran benchmarks:
-m64 -Mstandard -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-aggressive-gather=true
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -ffast-math -O3
-march=znver5 -fveclib=AMDLIBM -flto -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm -lamdalloc
-lflang

Benchmarks using both C and C++:
-m64 -std=c++17 -std=c18 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-ffast-math -O3 -march=znver5 -fveclib=AMDLIBM -fno-PIE -no-pie
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000 -lamdlibm -lamdalloc -lflang

Peak Optimization Flags

C benchmarks:

782.lbm_r: basepeak = yes

C++ benchmarks:

731.astcenc_r: basepeak = yes

736.ocio_r: basepeak = yes

748.flightdm_r: basepeak = yes

766.femflow_r: basepeak = yes

(Continued on next page)

Peak Optimization Flags (Continued)

767.nest_r: `basepeak = yes`

772.marian_r: `basepeak = yes`

Fortran benchmarks:

722.palm_r: `basepeak = yes`

749.fotonik3d_r: `basepeak = yes`

765.roms_r: `basepeak = yes`

Benchmarks using both C and C++:

709.cactus_r: `basepeak = yes`

737.gmsh_r: `basepeak = yes`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2026/results/flags/HPE-Platform-Flags-AMD-Turin-rev1.11.html`
`http://www.spec.org/cpu2026/results/flags/aocc-flags.2026-05-04.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2026/results/flags/HPE-Platform-Flags-AMD-Turin-rev1.11.xml`
`http://www.spec.org/cpu2026/results/flags/aocc-flags.2026-05-04.xml`

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2026 v0.902.0 on 2026-02-02 07:13:06-0500.
Report generated on 2026-05-11 16:38:26 by CPU2026 PS formatter (86729d3b).
Originally published on 2026-05-05.