



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp®_rate2006 = 119

ProLiant DL385 G5p
(2.9 GHz AMD Opteron 2389)

SPECfp_rate_base2006 = 108

CPU2006 license: 3


Test date: Mar-2009

Test sponsor: Hewlett-Packard Company

Hardware Availability: Apr-2009

Tested by: Hewlett-Packard Company

Software Availability: Mar-2009

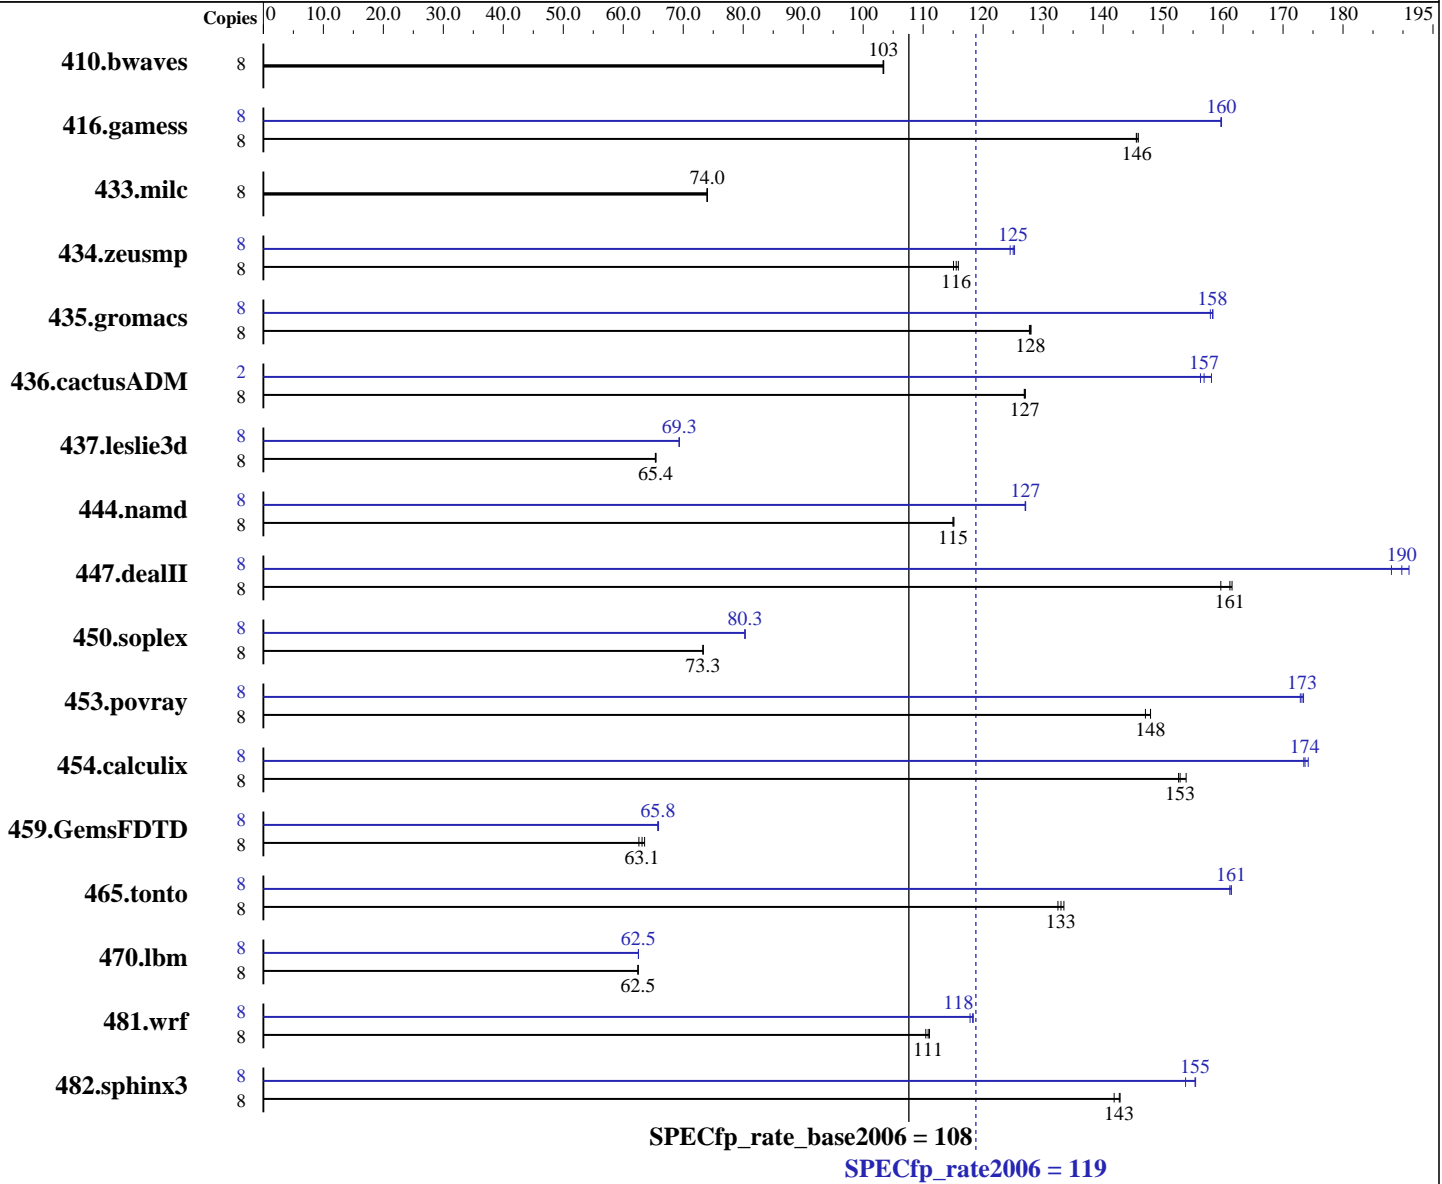

Hardware

CPU Name: AMD Opteron 2389
 CPU Characteristics:
 CPU MHz: 2900
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 2,4 chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 512 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 5.3, Kernel 2.6.18-128.el5
 Compiler: PGI Server Complete Version 8.0 PathScale Compiler Suite Version 3.2
 Auto Parallel: Yes
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 119

ProLiant DL385 G5p
(2.9 GHz AMD Opteron 2389)

SPECfp_rate_base2006 = 108

CPU2006 license: 3

Test date: Mar-2009

Test sponsor: Hewlett-Packard Company

Hardware Availability: Apr-2009

Tested by: Hewlett-Packard Company

Software Availability: Mar-2009

L3 Cache: 6 MB I+D on chip per chip
Other Cache: None
Memory: 32 GB (8x4 GB, PC2-6400P CL5)
Disk Subsystem: 1x72 GB 15 K SAS
Other Hardware: None

Other Software: binutils 2.18
32-bit and 64-bit libhugetlbfs libraries

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	1051	103	<u>1052</u>	<u>103</u>	1052	103	8	1051	103	<u>1052</u>	<u>103</u>	1052	103
416.gamess	8	1076	146	1074	146	<u>1076</u>	<u>146</u>	8	<u>981</u>	<u>160</u>	981	160	981	160
433.milc	8	<u>992</u>	<u>74.0</u>	993	73.9	992	74.0	8	<u>992</u>	<u>74.0</u>	993	73.9	992	74.0
434.zeusmp	8	<u>630</u>	<u>116</u>	628	116	633	115	8	585	125	<u>582</u>	<u>125</u>	581	125
435.gromacs	8	<u>447</u>	<u>128</u>	446	128	447	128	8	361	158	<u>361</u>	<u>158</u>	362	158
436.cactusADM	8	754	127	753	127	<u>753</u>	<u>127</u>	2	153	156	151	158	<u>152</u>	<u>157</u>
437.leslie3d	8	1151	65.4	<u>1150</u>	<u>65.4</u>	1149	65.5	8	1085	69.3	<u>1085</u>	<u>69.3</u>	1084	69.3
444.namd	8	558	115	557	115	<u>558</u>	<u>115</u>	8	<u>505</u>	<u>127</u>	505	127	505	127
447.dealII	8	567	161	573	160	<u>568</u>	<u>161</u>	8	487	188	479	191	<u>482</u>	<u>190</u>
450.soplex	8	910	73.3	911	73.3	<u>910</u>	<u>73.3</u>	8	831	80.3	831	80.3	<u>831</u>	<u>80.3</u>
453.povray	8	<u>288</u>	<u>148</u>	288	148	289	147	8	246	173	245	173	<u>246</u>	<u>173</u>
454.calculix	8	429	154	433	153	<u>432</u>	<u>153</u>	8	379	174	<u>380</u>	<u>174</u>	381	173
459.GemsFDTD	8	1335	63.6	<u>1344</u>	<u>63.1</u>	1356	62.6	8	1288	65.9	1291	65.7	<u>1290</u>	<u>65.8</u>
465.tonto	8	<u>592</u>	<u>133</u>	590	133	594	132	8	488	161	489	161	<u>488</u>	<u>161</u>
470.lbm	8	1760	62.5	<u>1760</u>	<u>62.5</u>	1760	62.5	8	1758	62.5	<u>1758</u>	<u>62.5</u>	1758	62.5
481.wrf	8	809	110	805	111	<u>806</u>	<u>111</u>	8	755	118	758	118	<u>756</u>	<u>118</u>
482.sphinx3	8	1092	143	1099	142	<u>1093</u>	<u>143</u>	8	1003	155	1014	154	<u>1004</u>	<u>155</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Operating System Notes

Environment stack size set to 'unlimited'
Max locked memory set to 2097152
The libhugetlbfs libraries were installed using the installation rpms that came with the distribution.
PGI_HUGE_PAGES set to 896.
Total number of huge pages available is 7168.
NCPUS set to number of cores



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 119

ProLiant DL385 G5p
(2.9 GHz AMD Opteron 2389)

SPECfp_rate_base2006 = 108

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Mar-2009
Hardware Availability: Apr-2009
Software Availability: Mar-2009

Platform Notes

BIOS configuration:
Power Regulator set to Static High Performance Mode

General Notes

Environment variables set by runspec before the start of the run:
HUGETLB_MORECORE = "yes"
NCPUS = "4"

Base Compiler Invocation

C benchmarks:
pgcc

C++ benchmarks:
pgcpp

Fortran benchmarks:
pgf95

Benchmarks using both Fortran and C:
pgcc pgf95

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -Mnomain
436.cactusADM: -DSPEC_CPU_LP64 -Mnomain
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -Mnomain
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 119

ProLiant DL385 G5p
(2.9 GHz AMD Opteron 2389)

SPECfp_rate_base2006 = 108

CPU2006 license: 3

Test date: Mar-2009

Test sponsor: Hewlett-Packard Company

Hardware Availability: Apr-2009

Tested by: Hewlett-Packard Company

Software Availability: Mar-2009

Base Optimization Flags

C benchmarks:

-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi

C++ benchmarks:

-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed
--zc_eh -Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi

Fortran benchmarks:

-Mvect=cachesize:6291456 -fastsse -Mfprelaxed -Msmartalloc=huge
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi

Benchmarks using both Fortran and C:

-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi

Base Other Flags

C benchmarks:

-Mipa=jobs:4

C++ benchmarks:

-Mipa=jobs:4

Fortran benchmarks:

-Mipa=jobs:4

Benchmarks using both Fortran and C:

-Mipa=jobs:4

Peak Compiler Invocation

C benchmarks:

pgcc

C++ benchmarks (except as noted below):

pathCC

444.namd: pgcpp

Fortran benchmarks (except as noted below):

pathf95

410.bwaves: pgf95

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 119

ProLiant DL385 G5p
(2.9 GHz AMD Opteron 2389)

SPECfp_rate_base2006 = 108

CPU2006 license: 3

Test date: Mar-2009

Test sponsor: Hewlett-Packard Company

Hardware Availability: Apr-2009

Tested by: Hewlett-Packard Company

Software Availability: Mar-2009

Peak Compiler Invocation (Continued)

434.zeusmp: pgf95

437.leslie3d: pgf95

Benchmarks using both Fortran and C (except as noted below):

pathcc pathf95

436.cactusADM: pgcc pgf95

454.calculix: pgcc pgf95

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64

416.gamess: -DSPEC_CPU_LP64

433.milc: -DSPEC_CPU_LP64

434.zeusmp: -DSPEC_CPU_LP64

435.gromacs: -DSPEC_CPU_LP64

436.cactusADM: -DSPEC_CPU_LP64 -Mnomain

437.leslie3d: -DSPEC_CPU_LP64

444.namd: -DSPEC_CPU_LP64

453.povray: -DSPEC_CPU_LP64

454.calculix: -DSPEC_CPU_LP64 -Mnomain

459.GemsFDTD: -DSPEC_CPU_LP64

465.tonto: -DSPEC_CPU_LP64

470.lbm: -DSPEC_CPU_LP64

481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -fno-second-underscore

482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: -Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge

-Mprefetch=t0 -Mloop32 -Mfprelaxed -Mipa=fast -Mipa=inline

-tp barcelona-64 -Bstatic_pgi

482.sphinx3: -Mphi=indirect(pass 1) -Mpfo=indirect(pass 2)

-Mipa=fast(pass 2) -Mipa=inline(pass 2)

-Mvect=cachesize:6291456 -fastsse -Mfprelaxed -Msmartalloc

-tp barcelona-64 -Bstatic_pgi

C++ benchmarks:

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 5



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 119

ProLiant DL385 G5p
(2.9 GHz AMD Opteron 2389)

SPECfp_rate_base2006 = 108

CPU2006 license: 3

Test date: Mar-2009

Test sponsor: Hewlett-Packard Company

Hardware Availability: Apr-2009

Tested by: Hewlett-Packard Company

Software Availability: Mar-2009

Peak Optimization Flags (Continued)

444.namd: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)
-Mipa=inline(pass 2) -Mvect=cachesize:6291456 -fastsse
-Munroll=n:4 -Munroll=m:8 -Msmartalloc=huge -Mnodepchk
-Mfprelaxed --zc_eh -tp barcelona-64 -Bstatic_pgi

447.deallI: -march=barcelona -Ofast -INLINE:aggressive=on -LNO:opt=0
-OPT:alias=disjoint -fno-exceptions -m32

450.soplex: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -L/usr/lib -lhugetlbfs(pass 2) -O3
-INLINE:aggressive=on -OPT:IEEE_arith=3
-OPT:IEEE_NaN_Inf=off -OPT:fold_unsigned_relops=on
-OPT:malloc_alg=1 -CG:load_exe=0 -fno-exceptions -m32

453.povray: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -INLINE:aggressive=on

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2)
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT(pass 2)
-L/usr/lib64 -lhugetlbfs(pass 2) -O2 -OPT:Ofast -OPT:ro=3
-OPT:unroll_size=256

434.zeusmp: -Mvect=cachesize:6291456 -fastsse -Mfprelaxed
-Mprefetch=distance:8 -Mprefetch=t0 -Msmartalloc=huge
-Msmartalloc=hugebss -Mipa=fast -Mipa=inline
-tp barcelona-64 -Bstatic_pgi

437.leslie3d: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2)
-Mipa=fast(pass 2) -Mipa=inline(pass 2)
-Mvect=cachesize:6291456 -fastsse -Mvect=fuse
-Msmartalloc=huge -Mprefetch=distance:8 -Mprefetch=t0
-Mfprelaxed -tp barcelona-64 -Bstatic_pgi

459.GemsFDTD: -march=barcelona -Ofast -LNO:fission=2 -LNO:simd=2
-LNO:prefetch_ahead=1 -CG:load_exe=0 -CG:prefer_lru_reg=off
-OPT:malloc_alg=1
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT
-L/usr/lib64 -lhugetlbfs

465.tonto: -march=barcelona -Ofast -OPT:alias=no_f90_pointer_alias
-LNO:blocking=off -CG:load_exe=1 -IPA:plimit=525
-OPT:malloc_alg=1
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT
-L/usr/lib64 -lhugetlbfs

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 119

ProLiant DL385 G5p
(2.9 GHz AMD Opteron 2389)

SPECfp_rate_base2006 = 108

CPU2006 license: 3

Test date: Mar-2009

Test sponsor: Hewlett-Packard Company

Hardware Availability: Apr-2009

Tested by: Hewlett-Packard Company

Software Availability: Mar-2009

Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

435.gromacs: -march=barcelona -Ofast -OPT:rsqrt=2 -OPT:malloc_alg=1
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT
-L/usr/lib64 -lhugetlbfs

436.cactusADM: -Mvect=cachesize:6291456 -fastsse -Mconcur
-Msmartalloc=huge -Mfprelaxed -Mipa=fast -Mipa=inline
-tp barcelona-64 -Bstatic_pgi

454.calculix: -Mphi=indirect(pass 1) -Mpfo=indirect(pass 2)
-Mipa=fast(pass 2) -Mipa=inline(pass 2)
-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge
-Mprefetch=t0 -Mpre -Mfprelaxed -tp barcelona-64
-Bstatic_pgi

481.wrf: -march=barcelona -Ofast -LNO:blocking=off
-LNO:prefetch_ahead=10 -LANG:copyinout=off
-IPA:callee_limit=5000 -GRA:prioritize_by_density=on
-OPT:malloc_alg=1 -m3dnow
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT
-L/usr/lib64 -lhugetlbfs

Peak Other Flags

C benchmarks:

-Mipa=jobs:4(pass 2)

C++ benchmarks:

444.namd: -Mipa=jobs:4(pass 2)

Fortran benchmarks (except as noted below):

-Mipa=jobs:4(pass 2)

416.gamess: No flags used

459.GemsFDTD: No flags used

465.tonto: No flags used

Benchmarks using both Fortran and C (except as noted below):

-Mipa=jobs:4(pass 2)

435.gromacs: No flags used

481.wrf: No flags used



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL385 G5p
(2.9 GHz AMD Opteron 2389)

SPECfp_rate2006 = 119

SPECfp_rate_base2006 = 108

CPU2006 license: 3

Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Mar-2009

Hardware Availability: Apr-2009

Software Availability: Mar-2009

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2006/flags/CPU2006_flags.20090710.00.html
http://www.spec.org/cpu2006/flags/pgi80_linux_flags.20090710.00.html
<http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.20090710.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2006/flags/CPU2006_flags.20090710.00.xml
http://www.spec.org/cpu2006/flags/pgi80_linux_flags.20090710.00.xml
<http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.20090710.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Tue Jul 22 23:56:17 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 12 May 2009.