SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

H8DA3-2, AMD Opteron 2439 SE

SPECfp®2006 = 22.1

SPECfp_base2006 = 18.0

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Jul-2009
Hardware Availability: Jun-2009
Software Availability: Apr-2009

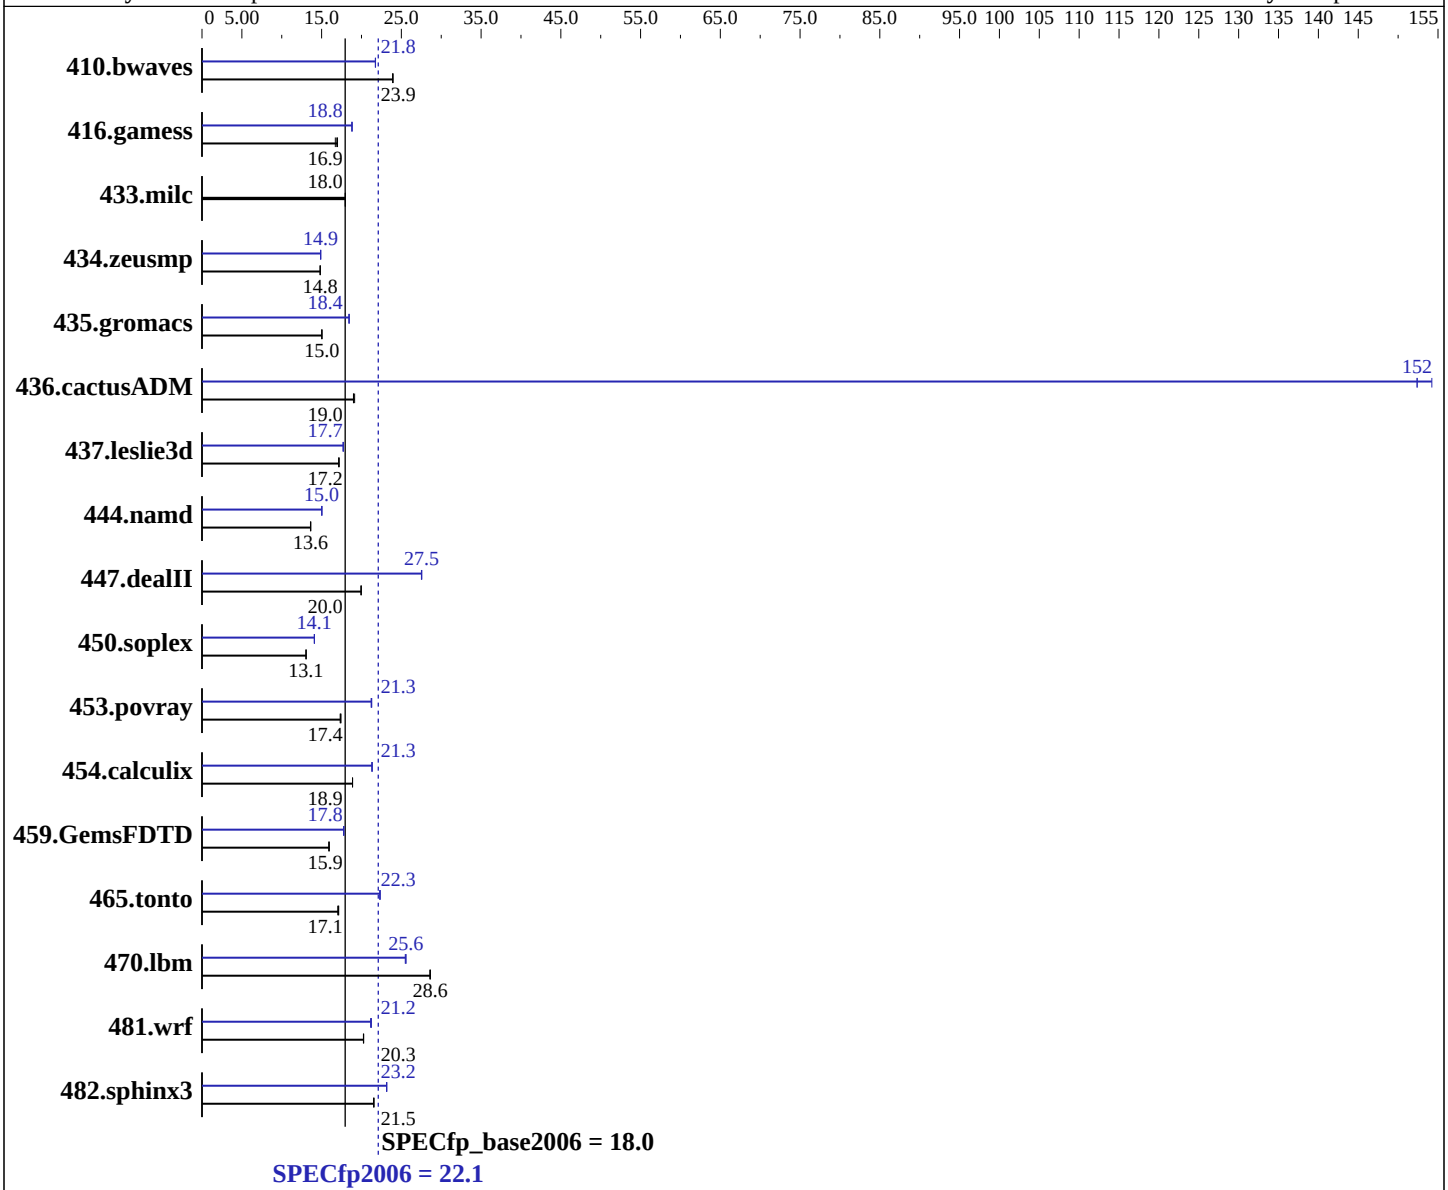

Hardware

CPU Name:	AMD Opteron 2439 SE
CPU Characteristics:	
CPU MHz:	2800
FPU:	Integrated
CPU(s) enabled:	12 cores, 2 chips, 6 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	512 KB I+D on chip per core

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server release 5.3, Advanced Platform, Kernel 2.6.18-128.el5
Compiler:	PGI Server Complete Version 8.0 x86 Open64 4.2.2 Compiler Suite (from AMD)
Auto Parallel:	Yes
File System:	ext3
System State:	Run level 2 (Local multiuser without remote network)
Base Pointers:	64-bit

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

H8DA3-2, AMD Opteron 2439 SE

SPECfp2006 = 22.1

SPECfp_base2006 = 18.0

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Jul-2009
Hardware Availability: Jun-2009
Software Availability: Apr-2009

L3 Cache: 6 MB I+D on chip per chip
Other Cache: None
Memory: 32 GB (8x4 GB, DDR2-800, CL5, Reg, Dual Rank)
Disk Subsystem: 1 x 500 GB SATA, 7200 RPM
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: binutils 2.18

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	567	24.0	**568**	**23.9**	568	23.9	**625**	**21.8**	625	21.7	624	21.8
416.gamess	**1158**	**16.9**	1171	16.7	1152	17.0	1042	18.8	1040	18.8	**1041**	**18.8**
433.milc	511	18.0	**511**	**18.0**	510	18.0	511	18.0	**511**	**18.0**	510	18.0
434.zeusmp	**614**	**14.8**	614	14.8	613	14.8	**612**	**14.9**	611	14.9	612	14.9
435.gromacs	**475**	**15.0**	475	15.0	475	15.0	387	18.5	**387**	**18.4**	387	18.4
436.cactusADM	629	19.0	**629**	**19.0**	624	19.1	**78.4**	**152**	78.4	152	77.5	154
437.leslie3d	546	17.2	**548**	**17.2**	548	17.1	**531**	**17.7**	530	17.7	531	17.7
444.namd	588	13.6	**588**	**13.6**	590	13.6	534	15.0	534	15.0	**534**	**15.0**
447.dealII	573	20.0	**573**	**20.0**	574	19.9	416	27.5	**415**	**27.5**	415	27.6
450.soplex	639	13.1	**639**	**13.1**	639	13.0	**592**	**14.1**	591	14.1	592	14.1
453.povray	305	17.4	**306**	**17.4**	307	17.3	250	21.3	**250**	**21.3**	251	21.2
454.calculix	**437**	**18.9**	437	18.9	437	18.9	387	21.3	**387**	**21.3**	387	21.3
459.GemsFDTD	667	15.9	665	16.0	**666**	**15.9**	**597**	**17.8**	597	17.8	597	17.8
465.tonto	578	17.0	**575**	**17.1**	574	17.1	440	22.3	442	22.3	**441**	**22.3**
470.lbm	480	28.6	**480**	**28.6**	481	28.6	**538**	**25.6**	539	25.5	537	25.6
481.wrf	**551**	**20.3**	552	20.2	551	20.3	528	21.1	**526**	**21.2**	526	21.2
482.sphinx3	**905**	**21.5**	904	21.6	905	21.5	842	23.1	841	23.2	**842**	**23.2**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152'  was used to set environment locked pages in memory limit

Set vm/nr_hugepages=5400 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages
```

General Notes

```
Environment variables set by runspec before the start of the run:
HUGETLB_LIMIT = "450"
LD_LIBRARY_PATH = "/spec/amd0905is-libs/64:/spec/amd0905is-libs/32"
NCPUS = "12"
PGI_HUGE_PAGES = "450"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at
<a href="http://developer.amd.com/cpu/open64">http://developer.amd.com/cpu/open64</a>.

To ensure system stability, a 550W (minimum) ATX power supply
[ 4-pin (+12V), 8-pin (+12V) and 24-pin ] are required.

Product description can be obtained at:
http://www.supermicro.com/Aplus/motherboard/Opteron2000/MCP55/H8DA3-2.cfm
```

Base Compiler Invocation

C benchmarks:
pgcc

C++ benchmarks:
pgcpp

Fortran benchmarks:
pgf95

Benchmarks using both Fortran and C:
pgcc pgf95

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -Mnomain
436.cactusADM: -DSPEC_CPU_LP64 -Mnomain
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -Mnomain
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Continued on next page

Base Portability Flags (Continued)

482.sphinx3: `-DSPEC_CPU_LP64`

Base Optimization Flags

C benchmarks:
`-fastsse -Msmartalloc=huge -Mfprelaxed -Mipa=fast -Mipa=inline -tp shanghai-64 -Bstatic_pgi`

C++ benchmarks:
`-fastsse -Msmartalloc=huge -Mfprelaxed --zc_eh -Mipa=fast -Mipa=inline -tp shanghai-64 -Bstatic_pgi`

Fortran benchmarks:
`-fastsse -Msmartalloc=huge -Mfprelaxed -Mvect=short -Mipa=fast -Mipa=inline -tp shanghai-64 -Bstatic_pgi`

Benchmarks using both Fortran and C:
`-fastsse -Msmartalloc=huge -Mfprelaxed -Mipa=fast -Mipa=inline -tp shanghai-64 -Mvect=short -Bstatic_pgi`

Base Other Flags

C benchmarks:
`-Mipa=jobs:4`

C++ benchmarks:
`-Mipa=jobs:4`

Fortran benchmarks:
`-Mipa=jobs:4`

Benchmarks using both Fortran and C:
`-Mipa=jobs:4`

Peak Compiler Invocation

C benchmarks:
`pgcc`

C++ benchmarks (except as noted below):
`openCC`

444.namd: `pgcpp`

Continued on next page

Peak Compiler Invocation (Continued)

Fortran benchmarks (except as noted below):
openf95

410.bwaves: pgf95

434.zeusmp: pgf95

437.leslie3d: pgf95

Benchmarks using both Fortran and C (except as noted below):
pgcc pgf95

435.gromacs: opencc openf95

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -Mnomain
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -Mnomain
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: -fastsse -Msmartalloc=huge -Mprefetch=t0 -Mloop32
-Mfprelaxed -Mipa=fast -Mipa=inline -tp shanghai-64
-Bstatic_pgi

482.sphinx3: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2)
-Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse
-Mfprelaxed -Msmartalloc -tp shanghai-64 -Bstatic_pgi

Continued on next page

Peak Optimization Flags (Continued)

C++ benchmarks:

444.namd: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)
-Mipa=inline(pass 2) -fastsse -Munroll=n:4 -Munroll=m:8
-Msmartalloc=huge -Mnodepchk -Mfprelaxed --zc_eh
-tp shanghai-64 -Bstatic_pgi

447.dealII: -march=barcelona -Ofast -static -INLINE:aggressive=on
-LNO:opt=0 -Wf,-fno-exceptions -m32 -OPT:unroll_times_max=8
-OPT:unroll_size=256 -OPT:unroll_level=2 -HP:bdt=2m:heap=2m
-GRA:unspill=on -CG:cmp_peep=on -TENV:frame_pointer=off

450.soplex: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -INLINE:aggressive=on
-OPT:IEEE_arith=3 -OPT:IEEE_NaN_Inf=off
-OPT:fold_unsigned_relops=on -OPT:malloc_alg=1
-CG:load_exe=0 -fno-exceptions -m32 -HP:bdt=2m

453.povray: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -INLINE:aggressive=on
-HP:bdt=2m:heap=2m

Fortran benchmarks:

410.bwaves: -fastsse -Msmartalloc -Mprefetch=nta -Mfprelaxed
-Mipa=fast -Mipa=inline -tp shanghai-64 -Bstatic_pgi

416.gamess: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O2 -OPT:Ofast -OPT:ro=3
-OPT:unroll_size=256 -HP:bdt=2m:heap=2m

434.zeusmp: -fastsse -Mfprelaxed -Mprefetch=distance:8 -Mprefetch=t0
-Msmartalloc=huge -Msmartalloc=hugebss -Mipa=fast
-Mipa=inline -tp shanghai-64 -Bstatic_pgi

437.leslie3d: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2)
-Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse
-Mvect=fuse -Msmartalloc=huge -Mprefetch=distance:8
-Mprefetch=t0 -Mfprelaxed -tp shanghai-64 -Bstatic_pgi

459.GemsFDTD: -march=barcelona -Ofast -LNO:fission=2 -LNO:simd=2
-LNO:prefetch_ahead=1 -CG:load_exe=0 -HP

465.tonto: -march=barcelona -Ofast -OPT:alias=no_f90_pointer_alias
-LNO:blocking=off -CG:load_exe=1 -IPA:plimit=525 -HP

Benchmarks using both Fortran and C:

435.gromacs: -march=barcelona -Ofast -OPT:rsqrt=2 -HP:bdt=2m:heap=2m

Continued on next page

Peak Optimization Flags (Continued)

436.cactusADM: `-fastsse -Mconcur -Msmartalloc=huge -Mfprelaxed -Mipa=fast -Mipa=inline -tp shanghai-64 -Bstatic_pgi`

454.calculix: `-Mpfi=indirect`(pass 1) `-Mpfo=indirect`(pass 2) `-Mipa=fast`(pass 2) `-Mipa=inline`(pass 2) `-fastsse -Mvect=short -Msmartalloc=huge -Mprefetch=t0 -Mpre -Mfprelaxed -tp shanghai-64 -Bstatic_pgi`

481.wrf: `-fastsse -Mvect=noaltcode -Msmartalloc=huge -Mprefetch=distance:8 -Mfprelaxed -tp shanghai-64 -Bstatic_pgi`

Peak Other Flags

C benchmarks:
`-Mipa=jobs:4`(pass 2)

C++ benchmarks:

444.namd: `-Mipa=jobs:4`(pass 2)

Fortran benchmarks:

410.bwaves: `-Mipa=jobs:4`

434.zeusmp: `-Mipa=jobs:4`

437.leslie3d: `-Mipa=jobs:4`(pass 2)

Benchmarks using both Fortran and C:

436.cactusADM: `-Mipa=jobs:4`

454.calculix: `-Mipa=jobs:4`(pass 2)

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/amd-platform.20090710.html
http://www.spec.org/cpu2006/flags/pgi80_linux_flags.20090914.html
http://www.spec.org/cpu2006/flags/x86-open64-4.2.2-flags-revE.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/amd-platform.20090710.xml
http://www.spec.org/cpu2006/flags/pgi80_linux_flags.20090914.xml
http://www.spec.org/cpu2006/flags/x86-open64-4.2.2-flags-revE.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 04:29:36 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 8 October 2009.