



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint®_rate2006 = 170

Intel DH67BL motherboard (Intel Core i7-2700K)

SPECint_rate_base2006 = 164

CPU2006 license: 13


Test date: May-2014

Test sponsor: Intel Corporation

Hardware Availability: Dec-2012

Tested by: Intel Corporation

Software Availability: Oct-2013

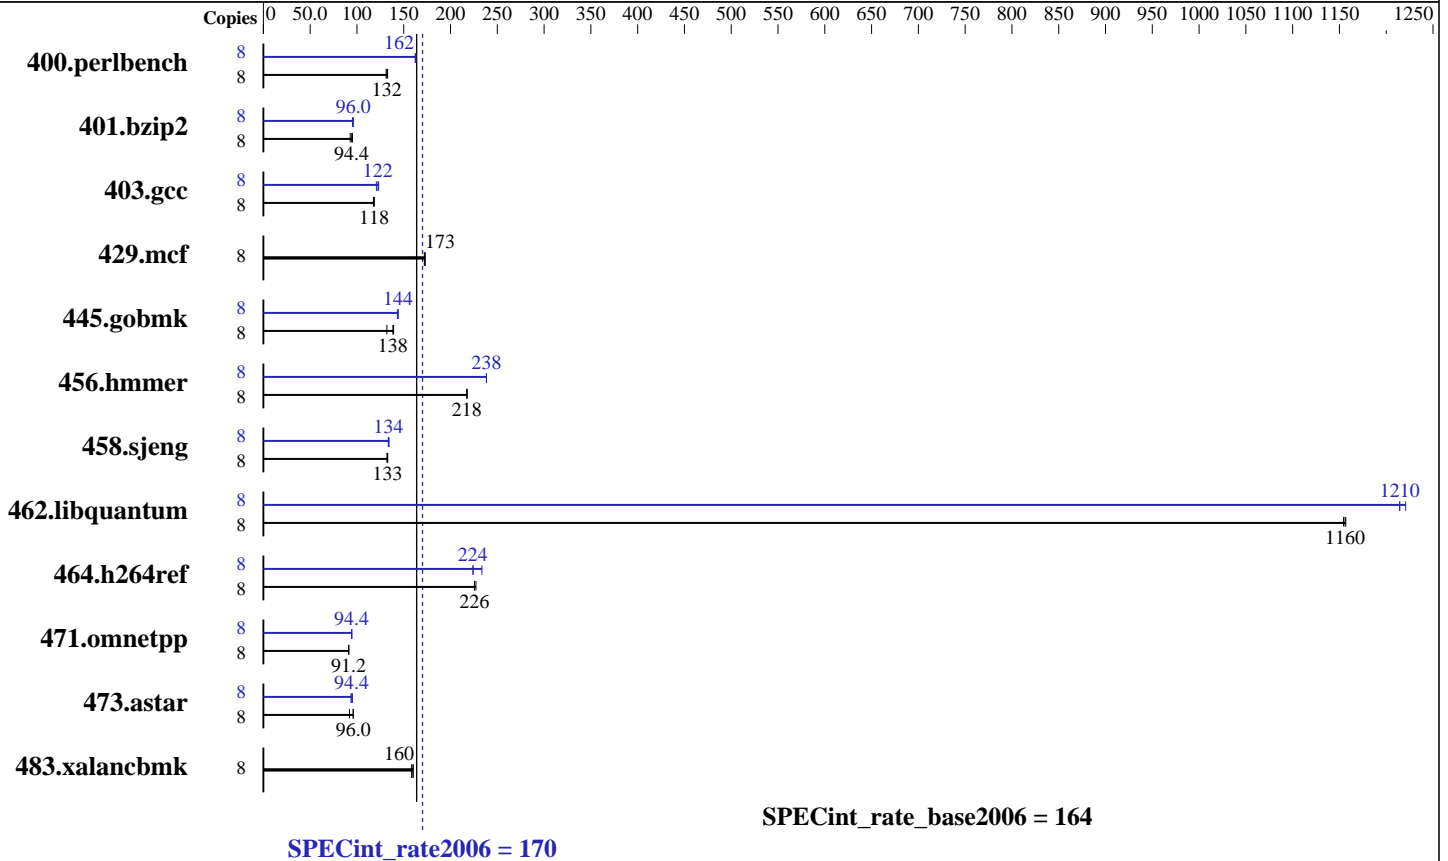

Hardware

CPU Name: Intel Core i7-2700K
 CPU Characteristics: Intel Turbo Boost Technology up to 3.90 GHz
 CPU MHz: 3500
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 8 MB I+D on chip per chip
 Other Cache: None
 Memory: 8 GB (2 x 4 GB 2Rx4 PC3-10600U-9)
 Disk Subsystem: 180 GB Intel SSD 530
 Other Hardware: None

Software

Operating System: Microsoft Windows 8.1 Pro
 6.3.9600 N/A Build 9600
 Compiler: C/C++: Version 14.0.1.139 of Intel C++ Studio XE for Windows;
 Libraries: Version 16.00.30319.01 of Microsoft Visual Studio 2010 Professional SP1
 Auto Parallel: No
 File System: NTFS
 System State: Default
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: SmartHeap Library Version 10.0 from <http://www.microquill.com/>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint_rate2006 = 170

Intel DH67BL motherboard (Intel Core i7-2700K)

SPECint_rate_base2006 = 164

CPU2006 license: 13

Test date: May-2014

Test sponsor: Intel Corporation

Hardware Availability: Dec-2012

Tested by: Intel Corporation

Software Availability: Oct-2013

Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	588	133	<u>593</u>	<u>132</u>	597	131	8	<u>480</u>	<u>162</u>	480	162	479	163
401.bzip2	8	831	92.8	814	95.2	<u>816</u>	<u>94.4</u>	8	803	96.0	<u>804</u>	<u>96.0</u>	814	95.2
403.gcc	8	549	118	542	118	<u>544</u>	<u>118</u>	8	524	123	<u>525</u>	<u>122</u>	532	121
429.mcf	8	<u>423</u>	<u>173</u>	424	172	422	173	8	<u>423</u>	<u>173</u>	424	172	422	173
445.gobmk	8	636	132	<u>605</u>	<u>138</u>	604	139	8	583	144	<u>583</u>	<u>144</u>	586	143
456.hmmer	8	<u>343</u>	<u>218</u>	344	218	343	218	8	313	238	313	238	<u>313</u>	<u>238</u>
458.sjeng	8	733	132	729	133	<u>730</u>	<u>133</u>	8	724	134	<u>723</u>	<u>134</u>	722	134
462.libquantum	8	143	1160	<u>143</u>	<u>1160</u>	144	1150	8	<u>137</u>	<u>1210</u>	137	1210	136	1220
464.h264ref	8	786	226	780	227	<u>786</u>	<u>226</u>	8	759	234	791	224	<u>790</u>	<u>224</u>
471.omnetpp	8	547	91.2	548	91.2	<u>547</u>	<u>91.2</u>	8	531	94.4	<u>531</u>	<u>94.4</u>	530	94.4
473.astar	8	611	92.0	<u>585</u>	<u>96.0</u>	585	96.0	8	591	95.2	<u>595</u>	<u>94.4</u>	598	93.6
483.xalancbmk	8	345	160	<u>345</u>	<u>160</u>	349	158	8	345	160	<u>345</u>	<u>160</u>	349	158

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

To compile these binaries, the Intel Compiler 14.0 was set up to generate 32-bit binaries with the command:
"ipsxe-comp-vars.bat ia32 vs2010" (shortcut provided in the Intel(r) Parallel Studio XE 2013 program folder)

Submit Notes

Processes were bound to specific processors using the start command with the /affinity switch. The config file option 'submit' was used to generate the affinity mask for each process.

Platform Notes

Sysinfo program C:\SPEC14.0/Docs/sysinfo
\$Rev: 6775 \$ \$Date:: 2011-08-16 #\$ \8787f7622badcf24e01c368b1db4377c
running on IVB9600 Thu May 29 04:01:45 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

Trying 'systeminfo'
OS Name : Microsoft Windows 8.1 Pro
OS Version : 6.3.9600 N/A Build 9600
System Manufacturer: INTEL_
System Model : DH67BL_
Processor(s) : 1 Processor(s) Installed.

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint_rate2006 = 170

Intel DH67BL motherboard (Intel Core i7-2700K)

SPECint_rate_base2006 = 164

CPU2006 license: 13

Test date: May-2014

Test sponsor: Intel Corporation

Hardware Availability: Dec-2012

Tested by: Intel Corporation

Software Availability: Oct-2013

Platform Notes (Continued)

[01]: Intel64 Family 6 Model 42 Stepping 7 GenuineIntel ~3501 Mhz
BIOS Version : Intel Corp. BLH6710H.86A.0160.2012.1204.1156, 12/4/2012
Total Physical Memory: 8,099 MB

Trying 'wmic cpu get /value'

DeviceID : CPU0
L2CacheSize : 1024
L3CacheSize : 8192
MaxClockSpeed : 3501
Name : Intel(R) Core(TM) i7-2700K CPU @ 3.50GHz
NumberOfCores : 4
NumberOfLogicalProcessors: 8

(End of data from sysinfo program)

BIOS: SATA mode set to RAID

Windows Disk Driver: Intel Rapid Storage Technology 12.0.1.1019

Component Notes

Tested systems can be used with Shin-G ATX case,
PC Power and Cooling 1200W power supply

General Notes

Binaries compiled on a system with 1x Intel Core i7-860 CPU
+ 8GB memory using Windows 7 Enterprise 64-bit

Base Compiler Invocation

C benchmarks:

icl -Qvc10 -Qstd=c99

C++ benchmarks:

icl -Qvc10

Base Portability Flags

403.gcc: -DSPEC_CPU_WIN32
464.h264ref: -DWIN32 -DSPEC_CPU_NO_INTTYPES
483.xalancbmk: -Qoption,cpp,--no_wchar_t_keyword



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint_rate2006 = 170

Intel DH67BL motherboard (Intel Core i7-2700K)

SPECint_rate_base2006 = 164

CPU2006 license: 13

Test date: May-2014

Test sponsor: Intel Corporation

Hardware Availability: Dec-2012

Tested by: Intel Corporation

Software Availability: Oct-2013

Base Optimization Flags

C benchmarks:

-QxAVX -Qipo -O3 -Qprec-div- -Qopt-prefetch /F512000000

C++ benchmarks:

-QxAVX -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qcxx-features
/F512000000 shlw32M.lib -link /FORCE:MULTIPLE

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icl -Qvc10 -Qstd=c99

456.hmmr: C:\Program Files (x86)\Intel\Composer XE 2013 SP1/bin/intel64/icl.exe

458.sjeng: C:\Program Files (x86)\Intel\Composer XE 2013 SP1/bin/intel64/icl.exe

462.libquantum: C:\Program Files (x86)\Intel\Composer XE 2013 SP1/bin/intel64/icl.exe
-Qstd=c99

C++ benchmarks (except as noted below):

icl -Qvc10

473.astar: C:\Program Files (x86)\Intel\Composer XE 2013 SP1/bin/intel64/icl.exe

Peak Portability Flags

403.gcc: -DSPEC_CPU_WIN32

456.hmmr: -DSPEC_CPU_P64

458.sjeng: -DSPEC_CPU_P64

462.libquantum: -DSPEC_CPU_P64

464.h264ref: -DWIN32 -DSPEC_CPU_NO_INTTYPES

473.astar: -DSPEC_CPU_P64

483.xalancbmk: -Qoption,cpp,--no_wchar_t_keyword



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint_rate2006 = 170

Intel DH67BL motherboard (Intel Core i7-2700K)

SPECint_rate_base2006 = 164

CPU2006 license: 13

Test date: May-2014

Test sponsor: Intel Corporation

Hardware Availability: Dec-2012

Tested by: Intel Corporation

Software Availability: Oct-2013

Peak Optimization Flags

C benchmarks:

400.perlbench: -QxAVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo
-O3 -Qprec-div- -Qansi-alias -Qopt-prefetch /F512000000
shlW32M.lib -link /FORCE:MULTIPLE

401.bzip2: -QxAVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo
-O3 -Qprec-div- -Qopt-prefetch -Qansi-alias /F512000000

403.gcc: -QxAVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo
-O3 -Qprec-div- -Qopt-prefetch /F512000000

429.mcf: basepeak = yes

445.gobmk: -QxAVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo
-O2 -Qprec-div- -Qansi-alias /F512000000

456.hmmer: -Qauto-ilp32 -QxAVX(pass 2) -Qprof_gen(pass 1)
-Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qopt-prefetch
/F512000000

458.sjeng: -Qauto-ilp32 -QxAVX(pass 2) -Qprof_gen(pass 1)
-Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll4
/F512000000

462.libquantum: -Qauto-ilp32 -QxAVX -Qipo -O3 -Qprec-div- -Qopt-prefetch
/F512000000

464.h264ref: -QxAVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo
-O3 -Qprec-div- -Qunroll2 -Qansi-alias /F512000000

C++ benchmarks:

471.omnetpp: -QxAVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo
-O3 -Qprec-div- -Qansi-alias
-Qopt-ra-region-strategy=block /F512000000 shlW32M.lib
-link /FORCE:MULTIPLE

473.astar: -Qauto-ilp32 -QxAVX -Qipo -O3 -Qprec-div- -Qopt-prefetch
/F512000000 shlW64M.lib -link /FORCE:MULTIPLE

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint_rate2006 = 170

Intel DH67BL motherboard (Intel Core i7-2700K)

SPECint_rate_base2006 = 164

CPU2006 license: 13

Test date: May-2014

Test sponsor: Intel Corporation

Hardware Availability: Dec-2012

Tested by: Intel Corporation

Software Availability: Oct-2013

Peak Other Flags (Continued)

403.gcc: -Dalloca=_alloca

456.hmmr: -link -LIBPATH:C:\Program Files (x86)\Intel\Composer XE 2013 SP1/compiler/lib/intel64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 10.0/VC/lib/AMD64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 10.0/VC/lib
-link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64

458.sjeng: -link -LIBPATH:C:\Program Files (x86)\Intel\Composer XE 2013 SP1/compiler/lib/intel64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 10.0/VC/lib/AMD64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 10.0/VC/lib
-link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64

462.libquantum: -link -LIBPATH:C:\Program Files (x86)\Intel\Composer XE 2013 SP1/compiler/lib/intel64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 10.0/VC/lib/AMD64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 10.0/VC/lib
-link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64

C++ benchmarks:

473.astar: -link -LIBPATH:C:\Program Files (x86)\Intel\Composer XE 2013 SP1/compiler/lib/intel64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 10.0/VC/lib/AMD64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 10.0/VC/lib
-link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-windows.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-windows.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Sep 9 10:44:59 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 18 June 2014.