



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**NEC Corporation**

**SPECfp®2006 = 39.1**

Express5800/R120b-2 (Intel Xeon E5606)

**SPECfp\_base2006 = 36.7**

CPU2006 license: 9006


Test date: May-2011

Test sponsor: NEC Corporation

Hardware Availability: Feb-2011

Tested by: NEC Corporation

Software Availability: Mar-2011

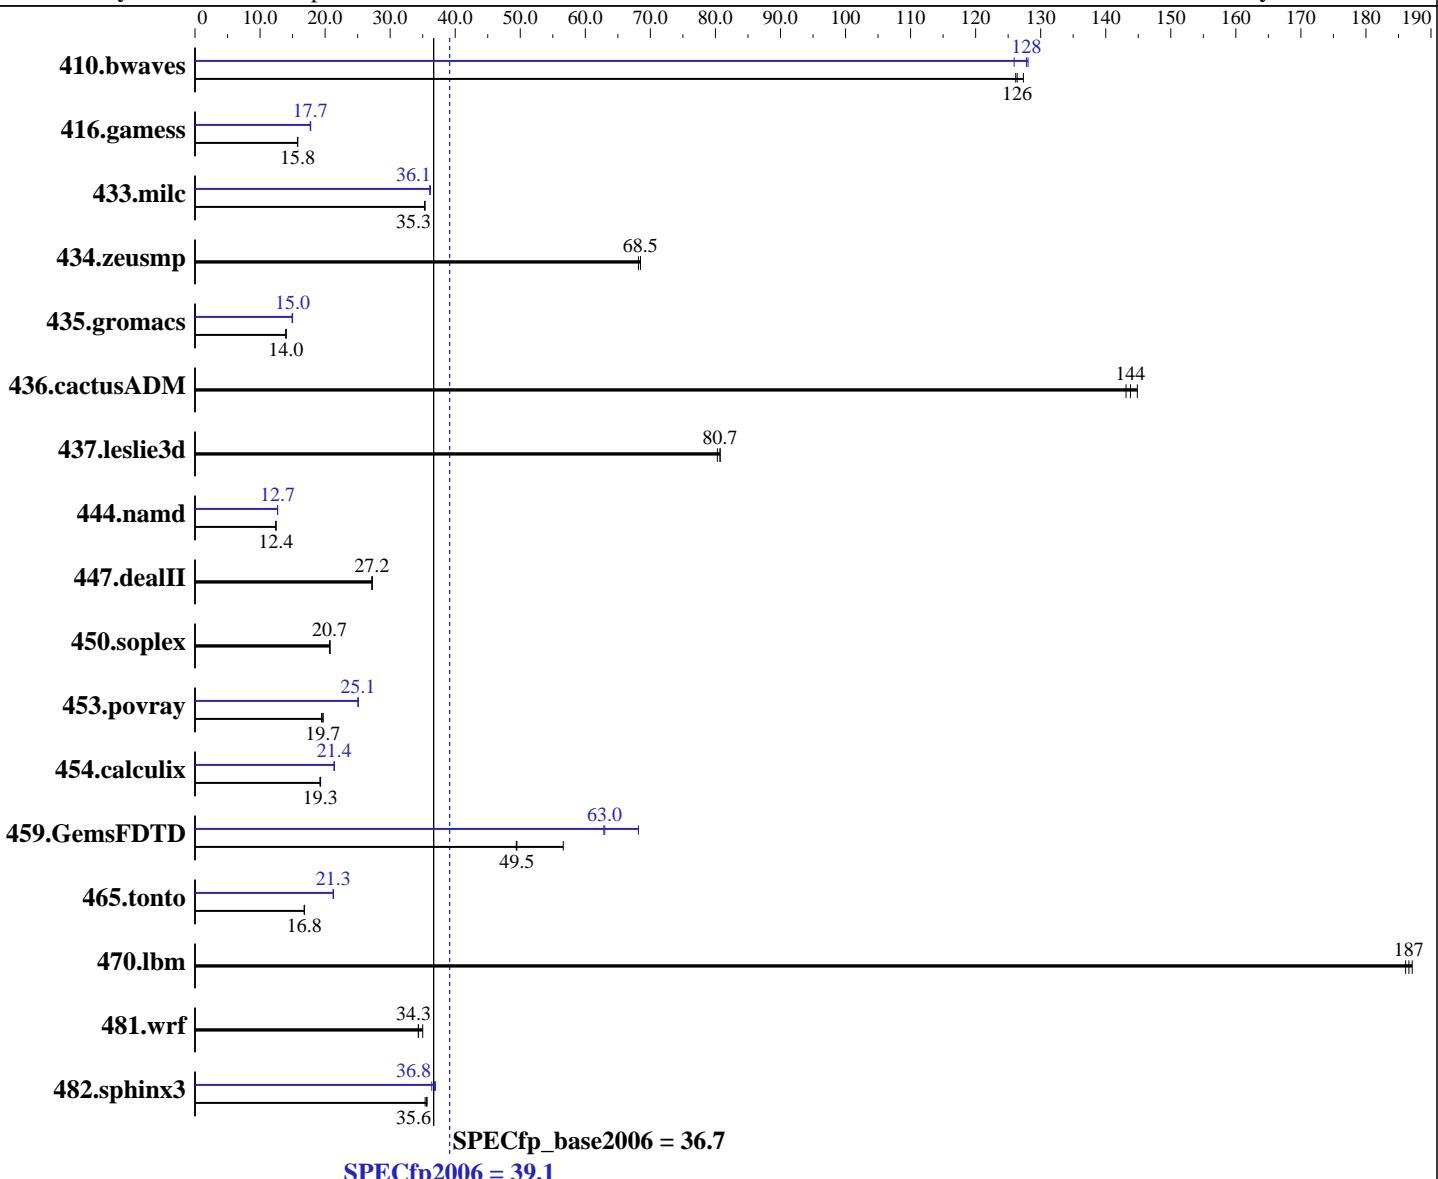

## Hardware

CPU Name: Intel Xeon E5606  
CPU Characteristics:  
CPU MHz: 2133  
FPU: Integrated  
CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
CPU(s) orderable: 1,2 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core

## Software

Operating System: SUSE Linux Enterprise Server 11 SP1 (x86\_64), Kernel 2.6.32.12-0.7-default  
Compiler: Intel C++ and Fortran Intel 64 Compiler XE for applications running on Intel 64, Version 12.0.3.174 Build 20110309  
Auto Parallel: Yes  
File System: ext3  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/R120b-2 (Intel Xeon E5606)

**SPECfp2006 = 39.1**

**CPU2006 license:** 9006      **Test date:** May-2011  
**Test sponsor:** NEC Corporation      **Hardware Availability:** Feb-2011  
**Tested by:** NEC Corporation      **Software Availability:** Mar-2011

L3 Cache:	8 MB I+D on chip per chip	Peak Pointers:	32/64-bit
Other Cache:	None	Other Software:	None
Memory:	96 GB (12 x 8 GB 2Rx4 PC3-10600R-9, ECC, running at 1067 MHz and CL7)		
Disk Subsystem:	1 x 500 GB SATA, 7200 RPM		
Other Hardware:	None		

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	108	126	107	127	<b>108</b>	<b>126</b>	<b>106</b>	<b>128</b>	106	128	108	126
416.gamess	1241	15.8	1241	15.8	<b>1241</b>	<b>15.8</b>	1101	17.8	1104	17.7	<b>1104</b>	<b>17.7</b>
433.milc	260	35.3	<b>260</b>	<b>35.3</b>	260	35.4	254	36.2	254	36.1	<b>254</b>	<b>36.1</b>
434.zeusmp	133	68.5	<b>133</b>	<b>68.5</b>	133	68.2	<b>133</b>	<b>68.5</b>	<b>133</b>	<b>68.5</b>	133	68.2
435.gromacs	511	14.0	510	14.0	<b>510</b>	<b>14.0</b>	<b>476</b>	<b>15.0</b>	476	15.0	479	14.9
436.cactusADM	82.5	145	<b>83.1</b>	<b>144</b>	83.5	143	82.5	145	<b>83.1</b>	<b>144</b>	83.5	143
437.leslie3d	116	80.7	<b>116</b>	<b>80.7</b>	117	80.3	<b>116</b>	<b>80.7</b>	<b>116</b>	<b>80.7</b>	117	80.3
444.namd	645	12.4	<b>645</b>	<b>12.4</b>	645	12.4	632	12.7	<b>632</b>	<b>12.7</b>	632	12.7
447.dealII	420	27.2	420	27.2	<b>420</b>	<b>27.2</b>	420	27.2	420	27.2	<b>420</b>	<b>27.2</b>
450.soplex	402	20.7	<b>402</b>	<b>20.7</b>	403	20.7	<b>402</b>	<b>20.7</b>	<b>402</b>	<b>20.7</b>	403	20.7
453.povray	<b>270</b>	<b>19.7</b>	274	19.4	270	19.7	212	25.1	212	25.1	<b>212</b>	<b>25.1</b>
454.calculix	427	19.3	429	19.2	<b>428</b>	<b>19.3</b>	385	21.4	<b>385</b>	<b>21.4</b>	385	21.4
459.GemsFDTD	187	56.6	215	49.4	<b>214</b>	<b>49.5</b>	156	68.2	169	62.8	<b>168</b>	<b>63.0</b>
465.tonto	584	16.8	586	16.8	<b>585</b>	<b>16.8</b>	463	21.2	<b>463</b>	<b>21.3</b>	462	21.3
470.lbm	73.8	186	73.4	187	<b>73.6</b>	<b>187</b>	73.8	186	73.4	187	<b>73.6</b>	<b>187</b>
481.wrf	<b>325</b>	<b>34.3</b>	325	34.3	319	35.0	<b>325</b>	<b>34.3</b>	325	34.3	319	35.0
482.sphinx3	546	35.7	<b>547</b>	<b>35.6</b>	551	35.4	<b>536</b>	<b>36.4</b>	<b>527</b>	<b>37.0</b>	<b>529</b>	<b>36.8</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
'mount -t hugetlbfs nodev /mnt/hugepages' was used to enable large pages
echo 1800 > /proc/sys/vm/nr_hugepages
export HUGETLB_MORECORE=yes
export LD_PRELOAD=/usr/lib64/libhugetlbfs.so
```

## Platform Notes

BIOS Settings:  
Performance/Watt: Traditional  
Server Class: Custom  
Data Reuse Optimization: Disabled  
Memory Voltage: Normal



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/R120b-2 (Intel Xeon E5606)

**SPECfp2006 = 39.1**

**SPECfp\_base2006 = 36.7**

**CPU2006 license:** 9006

**Test sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test date:** May-2011

**Hardware Availability:** Feb-2011

**Software Availability:** Mar-2011

## General Notes

OMP\_NUM\_THREADS set to number of cores

The Express5800/R120b-1 and

the Express5800/R120b-2 models are electronically equivalent.

The results have been measured on the Express5800/R120b-1 model.

## Base Compiler Invocation

C benchmarks:

    icc -m64

C++ benchmarks:

    icpc -m64

Fortran benchmarks:

    ifort -m64

Benchmarks using both Fortran and C:

    icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
    433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
    444.namd: -DSPEC\_CPU\_LP64  
    447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
    465.tonto: -DSPEC\_CPU\_LP64  
    470.lbm: -DSPEC\_CPU\_LP64  
    481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

    -xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
    -ansi-alias

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

**SPECfp2006 = 39.1**

Express5800/R120b-2 (Intel Xeon E5606)

**SPECfp\_base2006 = 36.7**

CPU2006 license: 9006

Test date: May-2011

Test sponsor: NEC Corporation

Hardware Availability: Feb-2011

Tested by: NEC Corporation

Software Availability: Mar-2011

## Base Optimization Flags (Continued)

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias

## Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32  
-ansi-alias

470.lbm: basepeak = yes

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -ansi-alias  
-parallel

C++ benchmarks:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp2006 = 39.1

Express5800/R120b-2 (Intel Xeon E5606)

SPECfp\_base2006 = 36.7

CPU2006 license: 9006

Test date: May-2011

Test sponsor: NEC Corporation

Hardware Availability: Feb-2011

Tested by: NEC Corporation

Software Availability: Mar-2011

## Peak Optimization Flags (Continued)

444.namd: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias  
-B /usr/share/libhugetlbfsl -Wl,-melf\_x86\_64 -Wl,-hugetlbfsl-link=BDT

Fortran benchmarks:

410.bwaves: -xsse4.2 -ipo -O3 -no-prec-div -opt-prefetch -parallel  
-static

416.gamess: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel  
-B /usr/share/libhugetlbfsl -Wl,-melf\_x86\_64 -Wl,-hugetlbfsl-link=BDT

465.tonto: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc  
-opt-malloc-options=3 -auto -unroll4  
-B /usr/share/libhugetlbfsl -Wl,-melf\_x86\_64 -Wl,-hugetlbfsl-link=BDT

Benchmarks using both Fortran and C:

435.gromacs: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32  
-ansi-alias

436.cactusADM: basepeak = yes

454.calculix: -xsse4.2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

**SPECfp2006 = 39.1**

Express5800/R120b-2 (Intel Xeon E5606)

**SPECfp\_base2006 = 36.7**

**CPU2006 license:** 9006

**Test date:** May-2011

**Test sponsor:** NEC Corporation

**Hardware Availability:** Feb-2011

**Tested by:** NEC Corporation

**Software Availability:** Mar-2011

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>

<http://www.spec.org/cpu2006/flags/NEC-Intel-Linux-Settings-flags-revF.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>

<http://www.spec.org/cpu2006/flags/NEC-Intel-Linux-Settings-flags-revF.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 21:29:25 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 20 July 2011.