



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp<sup>®</sup>\_rate2006 = 183

PowerEdge R620 (Intel Xeon E5-2637, 3.00 GHz)

SPECfp\_rate\_base2006 = 178

CPU2006 license: 55


Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Mar-2012

Hardware Availability: Mar-2012

Software Availability: Feb-2012

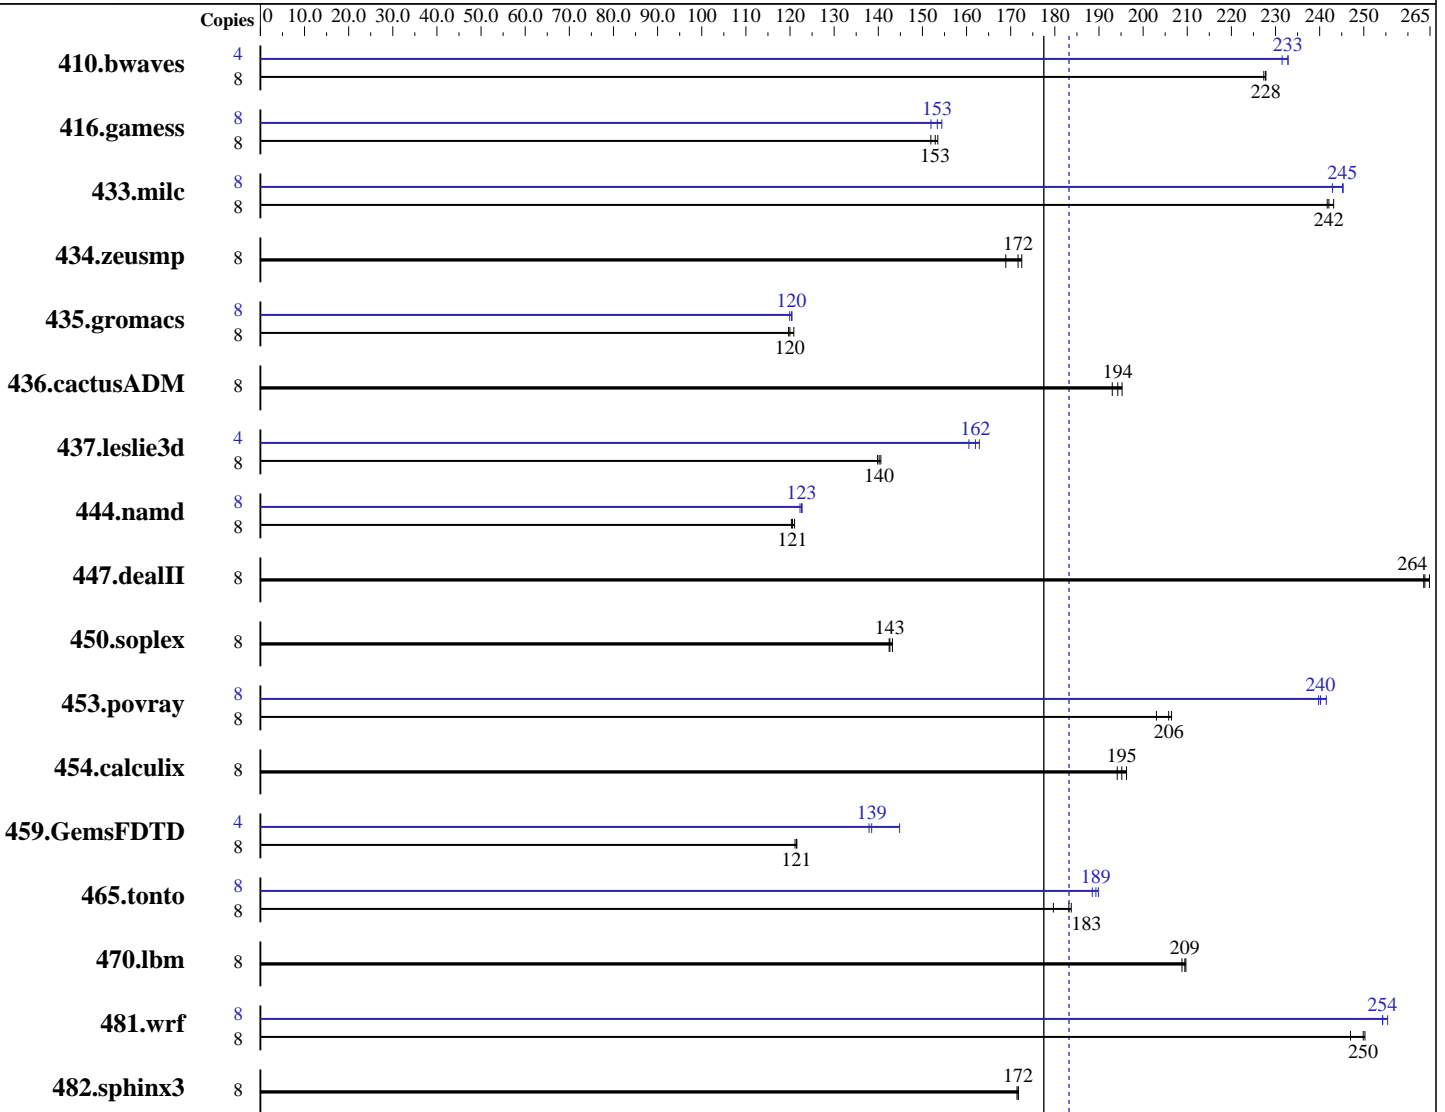

SPECfp\_rate\_base2006 = 178

SPECfp\_rate2006 = 183

### Hardware

CPU Name: Intel Xeon E5-2637  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.50 GHz  
 CPU MHz: 3000  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 2 chips, 2 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 11 SP2 (x86\_64) 3.0.13-0.9-default  
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux;  
 Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: ext3  
 System State: Run level 3 (multi-user)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 183

PowerEdge R620 (Intel Xeon E5-2637, 3.00 GHz)

SPECfp\_rate\_base2006 = 178

CPU2006 license: 55

Test date: Mar-2012

Test sponsor: Dell Inc.

Hardware Availability: Mar-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

L3 Cache: 5 MB I+D on chip per chip  
Other Cache: None  
Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC)  
Disk Subsystem: 2 x 146 GB 15000 RPM SAS, RAID 0  
Other Hardware: None

Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	<u>477</u>	<u>228</u>	478	227	477	228	4	233	233	<u>233</u>	<u>233</u>	235	231
416.gamess	8	<u>1024</u>	<u>153</u>	1031	152	1021	153	8	<u>1021</u>	<u>153</u>	1031	152	1015	154
433.milc	8	302	243	304	242	<u>303</u>	<u>242</u>	8	<u>300</u>	<u>245</u>	302	243	299	245
434.zeusmp	8	422	173	<u>424</u>	<u>172</u>	431	169	8	422	173	<u>424</u>	<u>172</u>	431	169
435.gromacs	8	477	120	<u>476</u>	<u>120</u>	473	121	8	476	120	<u>475</u>	<u>120</u>	474	120
436.cactusADM	8	495	193	490	195	<u>492</u>	<u>194</u>	8	495	193	490	195	<u>492</u>	<u>194</u>
437.leslie3d	8	<u>536</u>	<u>140</u>	535	141	538	140	4	234	161	231	163	<u>232</u>	<u>162</u>
444.namd	8	<u>532</u>	<u>121</u>	533	120	530	121	8	525	122	<u>523</u>	<u>123</u>	523	123
447.dealII	8	346	265	347	264	<u>347</u>	<u>264</u>	8	346	265	347	264	<u>347</u>	<u>264</u>
450.soplex	8	466	143	468	142	<u>468</u>	<u>143</u>	8	466	143	468	142	<u>468</u>	<u>143</u>
453.povray	8	206	206	<u>207</u>	<u>206</u>	210	203	8	<u>177</u>	<u>240</u>	176	242	178	240
454.calculix	8	336	196	340	194	<u>338</u>	<u>195</u>	8	336	196	340	194	<u>338</u>	<u>195</u>
459.GemsFDTD	8	701	121	698	122	<u>699</u>	<u>121</u>	4	<u>306</u>	<u>139</u>	308	138	293	145
465.tonto	8	438	180	<u>430</u>	<u>183</u>	428	184	8	418	188	<u>416</u>	<u>189</u>	415	190
470.lbm	8	524	210	526	209	<u>525</u>	<u>209</u>	8	524	210	526	209	<u>525</u>	<u>209</u>
481.wrf	8	<u>358</u>	<u>250</u>	362	247	357	250	8	<u>351</u>	<u>254</u>	350	255	351	254
482.sphinx3	8	910	171	<u>908</u>	<u>172</u>	908	172	8	910	171	<u>908</u>	<u>172</u>	908	172

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

System Profile set to Custom  
CPU Power Management set to Maximum Performance  
Memory Frequency set to Maximum Performance

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 183

PowerEdge R620 (Intel Xeon E5-2637, 3.00 GHz)

SPECfp\_rate\_base2006 = 178

CPU2006 license: 55

Test date: Mar-2012

Test sponsor: Dell Inc.

Hardware Availability: Mar-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

## Platform Notes (Continued)

```
Turbo Boost set to Enabled
C States/C1E set to Enabled
Sysinfo program /root/CPU2006-1.2/config/sysinfo.rev6800
$Rev: 6800 $ $Date:: 2011-10-11 #$ 6f2ebdff5032aaa42e583f96b07f99d3
running on unsvr Fri Mar 9 23:28:26 2012
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2637 0 @ 3.00GHz
 2 "physical id"s (chips)
 8 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 2
  siblings  : 4
  physical 0: cores 0 1
  physical 1: cores 0 1
cache size : 5120 KB
```

```
From /proc/meminfo
MemTotal:      132089856 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
/usr/bin/lsc_release -d
SUSE Linux Enterprise Server 11 (x86_64)
```

```
From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 11 (x86_64)
VERSION = 11
PATCHLEVEL = 2
```

```
uname -a:
Linux unsvr 3.0.13-0.9-default #1 SMP Mon Jan 16 17:33:03 UTC 2012 (54ddfaf)
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Mar 9 13:29 last=S
```

```
SPEC is set to: /root/CPU2006-1.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda1       ext3  265G   68G  183G  28% /
```

Additional information from dmidecode:

(End of data from sysinfo program)



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 183

PowerEdge R620 (Intel Xeon E5-2637, 3.00 GHz)

SPECfp\_rate\_base2006 = 178

CPU2006 license: 55

Test date: Mar-2012

Test sponsor: Dell Inc.

Hardware Availability: Mar-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/root/CPU2006-1.2/libs/32:/root/CPU2006-1.2/libs/64"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/transparent\_hugepage/enabled  
Filesystem page cache cleared with:  
echo 1> /proc/sys/vm/drop\_caches  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>  
The Dell PowerEdge R620 and the Bull NovaScale R440 F3 models are electronically equivalent.  
The results have been measured on a Dell PowerEdge R620 model.

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.lelie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.deallI: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 183

PowerEdge R620 (Intel Xeon E5-2637, 3.00 GHz)

SPECfp\_rate\_base2006 = 178

CPU2006 license: 55

Test date: Mar-2012

Test sponsor: Dell Inc.

Hardware Availability: Mar-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

## Base Portability Flags (Continued)

482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

## Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 183

PowerEdge R620 (Intel Xeon E5-2637, 3.00 GHz)

SPECfp\_rate\_base2006 = 178

CPU2006 license: 55

Test date: Mar-2012

Test sponsor: Dell Inc.

Hardware Availability: Mar-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

## Peak Portability Flags (Continued)

447.dealII: -DSPEC\_CPU\_LP64  
 450.soplex: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64

## Peak Optimization Flags

### C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32  
 -opt-mem-layout-trans=3

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

### C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
 -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

### Fortran benchmarks:

410.bwaves: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
 -inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 183

PowerEdge R620 (Intel Xeon E5-2637, 3.00 GHz)

SPECfp\_rate\_base2006 = 178

CPU2006 license: 55

Test date: Mar-2012

Test sponsor: Dell Inc.

Hardware Availability: Mar-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

## Peak Optimization Flags (Continued)

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto  
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch  
-static -auto-ilp32 -opt-mem-layout-trans=3

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xAVX -ipo -O3 -no-prec-div -static -auto-ilp32  
-opt-mem-layout-trans=3

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revA.20120410.00.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revA.20120410.00.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 04:22:07 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 24 April 2012.