



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp®_rate2006 = 696

PRIMERGY TX300 S8, Intel Xeon E5-2697 v2, 2.70 GHz

SPECfp_rate_base2006 = 678

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Aug-2013

Hardware Availability: Oct-2013

Software Availability: Sep-2013

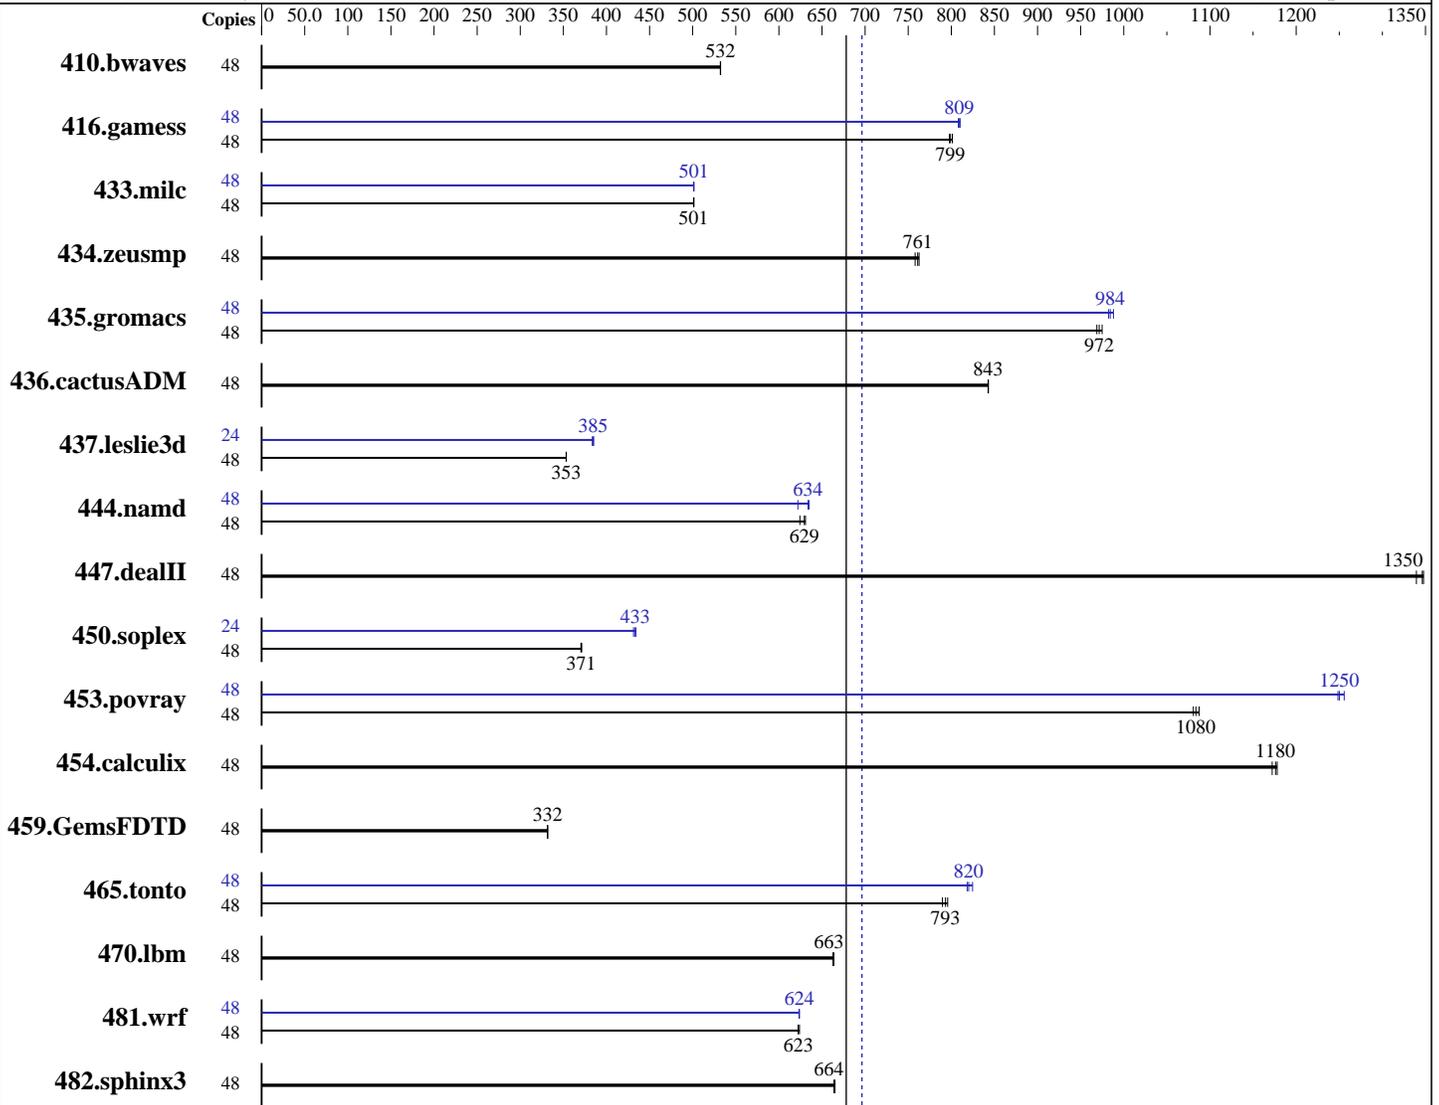

SPECfp_rate_base2006 = 678

SPECfp_rate2006 = 696

Hardware

CPU Name: Intel Xeon E5-2697 v2
 CPU Characteristics: Intel Turbo Boost Technology up to 3.50 GHz
 CPU MHz: 2700
 FPU: Integrated
 CPU(s) enabled: 24 cores, 2 chips, 12 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)
 2.6.32-358.11.1.el6.x86_64
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: ext4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp_rate2006 = **696**

PRIMERGY TX300 S8, Intel Xeon E5-2697 v2, 2.70 GHz

SPECfp_rate_base2006 = **678**

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Aug-2013

Hardware Availability: Oct-2013

Software Availability: Sep-2013

L3 Cache: 30 MB I+D on chip per chip
Other Cache: None
Memory: 256 GB (16 x 16 GB 2Rx4 PC3-14900R-13, ECC)
Disk Subsystem: 1 x SATA, 500 GB, 7200 RPM
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	48	1225	532	<u>1225</u>	<u>532</u>	1226	532	48	1225	532	<u>1225</u>	<u>532</u>	1226	532
416.gamess	48	1173	801	<u>1176</u>	<u>799</u>	1178	798	48	1163	808	1160	810	<u>1162</u>	<u>809</u>
433.milc	48	879	501	879	501	<u>879</u>	<u>501</u>	48	879	501	879	501	<u>879</u>	<u>501</u>
434.zeusmp	48	576	758	573	763	<u>574</u>	<u>761</u>	48	576	758	573	763	<u>574</u>	<u>761</u>
435.gromacs	48	352	975	354	969	<u>353</u>	<u>972</u>	48	347	988	<u>348</u>	<u>984</u>	349	982
436.cactusADM	48	680	843	681	843	<u>681</u>	<u>843</u>	48	680	843	681	843	<u>681</u>	<u>843</u>
437.leslie3d	48	1277	353	1277	353	<u>1277</u>	<u>353</u>	24	588	383	586	385	<u>587</u>	<u>385</u>
444.namd	48	610	631	<u>612</u>	<u>629</u>	617	624	48	606	635	<u>607</u>	<u>634</u>	619	622
447.dealII	48	<u>408</u>	<u>1350</u>	410	1340	407	1350	48	<u>408</u>	<u>1350</u>	410	1340	407	1350
450.soplex	48	1078	371	1081	370	<u>1080</u>	<u>371</u>	24	461	434	464	431	<u>462</u>	<u>433</u>
453.povray	48	<u>236</u>	<u>1080</u>	235	1090	236	1080	48	205	1250	<u>204</u>	<u>1250</u>	203	1260
454.calculix	48	336	1180	<u>337</u>	<u>1180</u>	338	1170	48	336	1180	<u>337</u>	<u>1180</u>	338	1170
459.GemsFDTD	48	1536	331	<u>1536</u>	<u>332</u>	1534	332	48	1536	331	<u>1536</u>	<u>332</u>	1534	332
465.tonto	48	594	796	598	790	<u>595</u>	<u>793</u>	48	573	825	577	818	<u>576</u>	<u>820</u>
470.lbm	48	994	664	995	663	<u>995</u>	<u>663</u>	48	994	664	995	663	<u>995</u>	<u>663</u>
481.wrf	48	859	624	862	622	<u>861</u>	<u>623</u>	48	860	624	860	623	<u>860</u>	<u>624</u>
482.sphinx3	48	1407	665	1409	664	<u>1409</u>	<u>664</u>	48	1407	665	1409	664	<u>1409</u>	<u>664</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS configuration:
Energy Performance = Performance



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp_rate2006 = 696

PRIMERGY TX300 S8, Intel Xeon E5-2697 v2, 2.70 GHz

SPECfp_rate_base2006 = 678

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Aug-2013
Hardware Availability: Oct-2013
Software Availability: Sep-2013

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/SPECcpu2006/libs/32:/SPECcpu2006/libs/64:/SPECcpu2006/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
This result was measured on the PRIMERGY RX350 S8. The PRIMERGY RX350 S8 and the PRIMERGY TX300 S8 are electronically equivalent.
For information about Fujitsu please visit: <http://www.fujitsu.com>

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.lelie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.deallI: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp_rate2006 = 696

PRIMERGY TX300 S8, Intel Xeon E5-2697 v2, 2.70 GHz

SPECfp_rate_base2006 = 678

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Aug-2013
Hardware Availability: Oct-2013
Software Availability: Sep-2013

Base Portability Flags (Continued)

482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp_rate2006 = 696

PRIMERGY TX300 S8, Intel Xeon E5-2697 v2, 2.70 GHz

SPECfp_rate_base2006 = 678

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Aug-2013
Hardware Availability: Oct-2013
Software Availability: Sep-2013

Peak Portability Flags (Continued)

437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-malloc-options=3

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp_rate2006 = 696

PRIMERGY TX300 S8, Intel Xeon E5-2697 v2, 2.70 GHz

SPECfp_rate_base2006 = 678

CPU2006 license: 19

Test date: Aug-2013

Test sponsor: Fujitsu

Hardware Availability: Oct-2013

Tested by: Fujitsu

Software Availability: Sep-2013

Peak Optimization Flags (Continued)

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xAVX -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20130924.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20130924.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 17:38:39 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 19 November 2013.