



# SPEC® CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Huawei

### SPECint®\_rate2006 = 2140

### Huawei RH5885 V3 (Intel Xeon E7-8891 v4)

### SPECint\_rate\_base2006 = 2040

CPU2006 license: 3175


Test date: Oct-2016

Test sponsor: Huawei

Hardware Availability: Jun-2016

Tested by: Huawei

Software Availability: Nov-2015

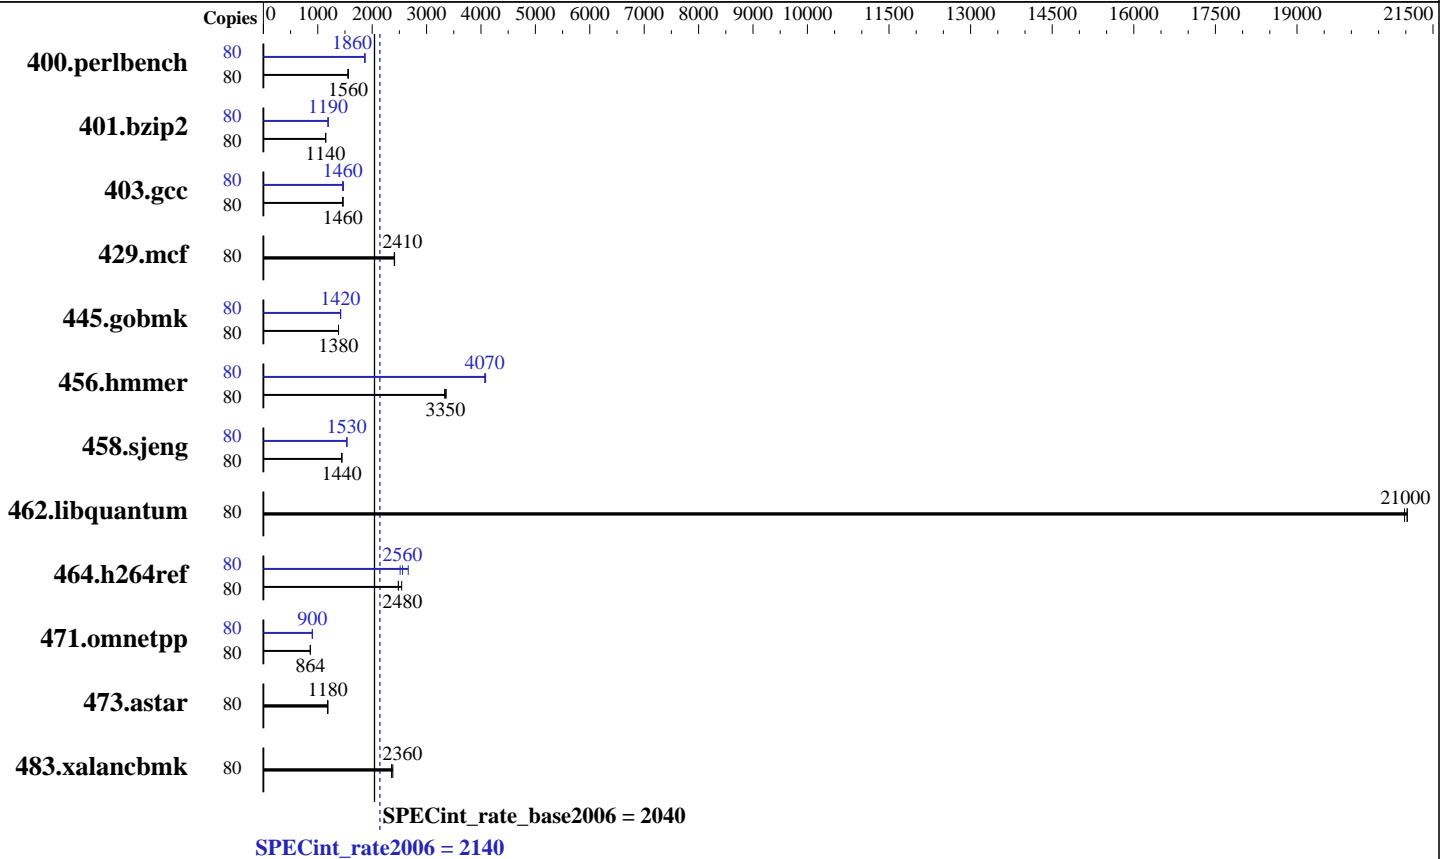

### Hardware

CPU Name: Intel Xeon E7-8891 v4  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.50 GHz  
 CPU MHz: 2800  
 FPU: Integrated  
 CPU(s) enabled: 40 cores, 4 chips, 10 cores/chip, 2 threads/core  
 CPU(s) orderable: 2,4 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 60 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 256 GB (16 x 16 GB 2Rx8 PC4-2400T-R, running at 1600 MHz)  
 Disk Subsystem: 2 x 600 GB SAS, 10K RPM  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 7.2 (Maipo)  
 3.10.0-327.el7.x86\_64  
 Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux  
 Auto Parallel: No  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.2



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Huawei

SPECint\_rate2006 = 2140

Huawei RH5885 V3 (Intel Xeon E7-8891 v4)

SPECint\_rate\_base2006 = 2040

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Oct-2016

Hardware Availability: Jun-2016

Software Availability: Nov-2015

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	80	500	1560	<u>501</u>	<u>1560</u>	503	1550	80	418	1870	<u>419</u>	<u>1860</u>	420	1860
401.bzip2	80	674	1150	675	1140	<u>675</u>	<u>1140</u>	80	650	1190	<u>648</u>	<u>1190</u>	648	1190
403.gcc	80	440	1460	<u>440</u>	<u>1460</u>	442	1460	80	442	1460	437	1470	<u>442</u>	<u>1460</u>
429.mcf	80	<u>303</u>	<u>2410</u>	302	2410	303	2410	80	<u>303</u>	<u>2410</u>	302	2410	303	2410
445.gobmk	80	607	1380	<u>608</u>	<u>1380</u>	608	1380	80	592	1420	<u>591</u>	<u>1420</u>	591	1420
456.hammer	80	222	3360	224	3330	<u>223</u>	<u>3350</u>	80	<u>183</u>	<u>4070</u>	183	4090	183	4070
458.sjeng	80	672	1440	671	1440	<u>672</u>	<u>1440</u>	80	631	1530	<u>631</u>	<u>1530</u>	631	1530
462.libquantum	80	<u>78.8</u>	<u>21000</u>	78.8	21000	79.0	21000	80	<u>78.8</u>	<u>21000</u>	78.8	21000	79.0	21000
464.h264ref	80	714	2480	<u>713</u>	<u>2480</u>	696	2540	80	665	2660	<u>692</u>	<u>2560</u>	704	2510
471.omnetpp	80	578	865	<u>579</u>	<u>864</u>	579	863	80	555	901	<u>555</u>	<u>900</u>	555	900
473.astar	80	475	1180	475	1180	<u>475</u>	<u>1180</u>	80	475	1180	475	1180	<u>475</u>	<u>1180</u>
483.xalancbmk	80	234	2360	<u>234</u>	<u>2360</u>	232	2380	80	234	2360	<u>234</u>	<u>2360</u>	232	2380

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Turbo mode set with:  
cpupower -c all frequency-set -g performance

## Platform Notes

BIOS configuration:  
Set Power Efficiency Mode to Performance  
Set Lock\_step to disabled  
Baseboard Management Controller used to adjust the fan speed to 100%  
Set C-State to C0/C1  
Sysinfo program /home/speccpu/config/sysinfo.rev6914  
\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1  
running on RH5885V3 Wed Oct 12 23:40:28 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) CPU E7-8891 v4 @ 2.80GHz  
Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

SPECint\_rate2006 = 2140

Huawei RH5885 V3 (Intel Xeon E7-8891 v4)

SPECint\_rate\_base2006 = 2040

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Oct-2016

Hardware Availability: Jun-2016

Software Availability: Nov-2015

## Platform Notes (Continued)

```

4 "physical id"s (chips)
80 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 10
siblings  : 20
physical 0: cores 5 9 10 11 13 18 24 26 28 29
physical 1: cores 5 9 10 11 13 18 24 26 28 29
physical 2: cores 5 9 10 11 13 18 24 26 28 29
physical 3: cores 5 9 10 11 13 18 24 26 28 29
cache size : 61440 KB

```

```

From /proc/meminfo
MemTotal:      263856772 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.2 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.2"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.2 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.2:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.2:ga:server

```

```

uname -a:
Linux RH5885V3 3.10.0-327.el7.x86_64 #1 SMP Thu Oct 29 17:29:29 EDT 2015
x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Oct 12 23:37

```

SPEC is set to: /home/speccpu
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs   419G  8.0G  411G   2% /home

```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. BLISV767 07/27/2016

Memory:

16x Micron 18ASF2G72PDZ-2G3B1 16 GB 2 rank 2400 MHz, configured at 1600 MHz  
32x NO DIMM NO DIMM

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

SPECint\_rate2006 = 2140

Huawei RH5885 V3 (Intel Xeon E7-8891 v4)

SPECint\_rate\_base2006 = 2040

CPU2006 license: 3175  
Test sponsor: Huawei  
Tested by: Huawei

Test date: Oct-2016  
Hardware Availability: Jun-2016  
Software Availability: Nov-2015

## Platform Notes (Continued)

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/home/speccpu/libs/32:/home/speccpu/libs/64:/home/speccpu/sh"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop\_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/compiler/lib/ia32\_lin

C++ benchmarks:

icpc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/compiler/lib/ia32\_lin

## Base Portability Flags

400.perlbench: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX\_IA32  
401.bzip2: -D\_FILE\_OFFSET\_BITS=64  
403.gcc: -D\_FILE\_OFFSET\_BITS=64  
429.mcf: -D\_FILE\_OFFSET\_BITS=64  
445.gobmk: -D\_FILE\_OFFSET\_BITS=64  
456.hmmer: -D\_FILE\_OFFSET\_BITS=64  
458.sjeng: -D\_FILE\_OFFSET\_BITS=64  
462.libquantum: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX  
464.h264ref: -D\_FILE\_OFFSET\_BITS=64  
471.omnetpp: -D\_FILE\_OFFSET\_BITS=64  
473.astar: -D\_FILE\_OFFSET\_BITS=64  
483.xalancbmk: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

SPECint\_rate2006 = 2140

Huawei RH5885 V3 (Intel Xeon E7-8891 v4)

SPECint\_rate\_base2006 = 2040

CPU2006 license: 3175

Test date: Oct-2016

Test sponsor: Huawei

Hardware Availability: Jun-2016

Tested by: Huawei

Software Availability: Nov-2015

## Base Optimization Flags (Continued)

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmarthearp

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/compiler/lib/ia32\_lin

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/compiler/lib/ia32\_lin

## Peak Portability Flags

400.perlbench: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64

401.bzip2: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LP64

403.gcc: -D\_FILE\_OFFSET\_BITS=64

429.mcf: -D\_FILE\_OFFSET\_BITS=64

445.gobmk: -D\_FILE\_OFFSET\_BITS=64

456.hmmer: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LP64

458.sjeng: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LP64

462.libquantum: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX

464.h264ref: -D\_FILE\_OFFSET\_BITS=64

471.omnetpp: -D\_FILE\_OFFSET\_BITS=64

473.astar: -D\_FILE\_OFFSET\_BITS=64

483.xalancbmk: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

SPECint\_rate2006 = 2140

Huawei RH5885 V3 (Intel Xeon E7-8891 v4)

SPECint\_rate\_base2006 = 2040

CPU2006 license: 3175

Test date: Oct-2016

Test sponsor: Huawei

Hardware Availability: Jun-2016

Tested by: Huawei

Software Availability: Nov-2015

## Peak Optimization Flags

C benchmarks:

- 400.perlbench: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -auto-ilp32
- 401.bzip2: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -opt-prefetch  
-auto-ilp32 -ansi-alias
- 403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div
- 429.mcf: basepeak = yes
- 445.gobmk: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-prof-use(pass 2) -par-num-threads=1(pass 1) -ansi-alias  
-opt-mem-layout-trans=3
- 456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32
- 458.sjeng: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4  
-auto-ilp32
- 462.libquantum: basepeak = yes
- 464.h264ref: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2  
-ansi-alias
- C++ benchmarks:
- 471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -ansi-alias  
-opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/sh -lsmartheap
- 473.astar: basepeak = yes
- 483.xalancbmk: basepeak = yes



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

SPECint\_rate2006 = 2140

Huawei RH5885 V3 (Intel Xeon E7-8891 v4)

SPECint\_rate\_base2006 = 2040

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Oct-2016

Hardware Availability: Jun-2016

Software Availability: Nov-2015

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.2-BDW-RevG.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.2-BDW-RevG.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Wed Dec 28 10:50:48 2016 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 27 December 2016.