



# SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

**SPECfp®\_rate2006 = 689**

Huawei CH220 V3(Intel Xeon E5-2630 v4)

**SPECfp\_rate\_base2006 = 675**

CPU2006 license: 3175


Test date: Dec-2016

Test sponsor: Huawei

Hardware Availability: Mar-2016

Tested by: Huawei

Software Availability: Dec-2015

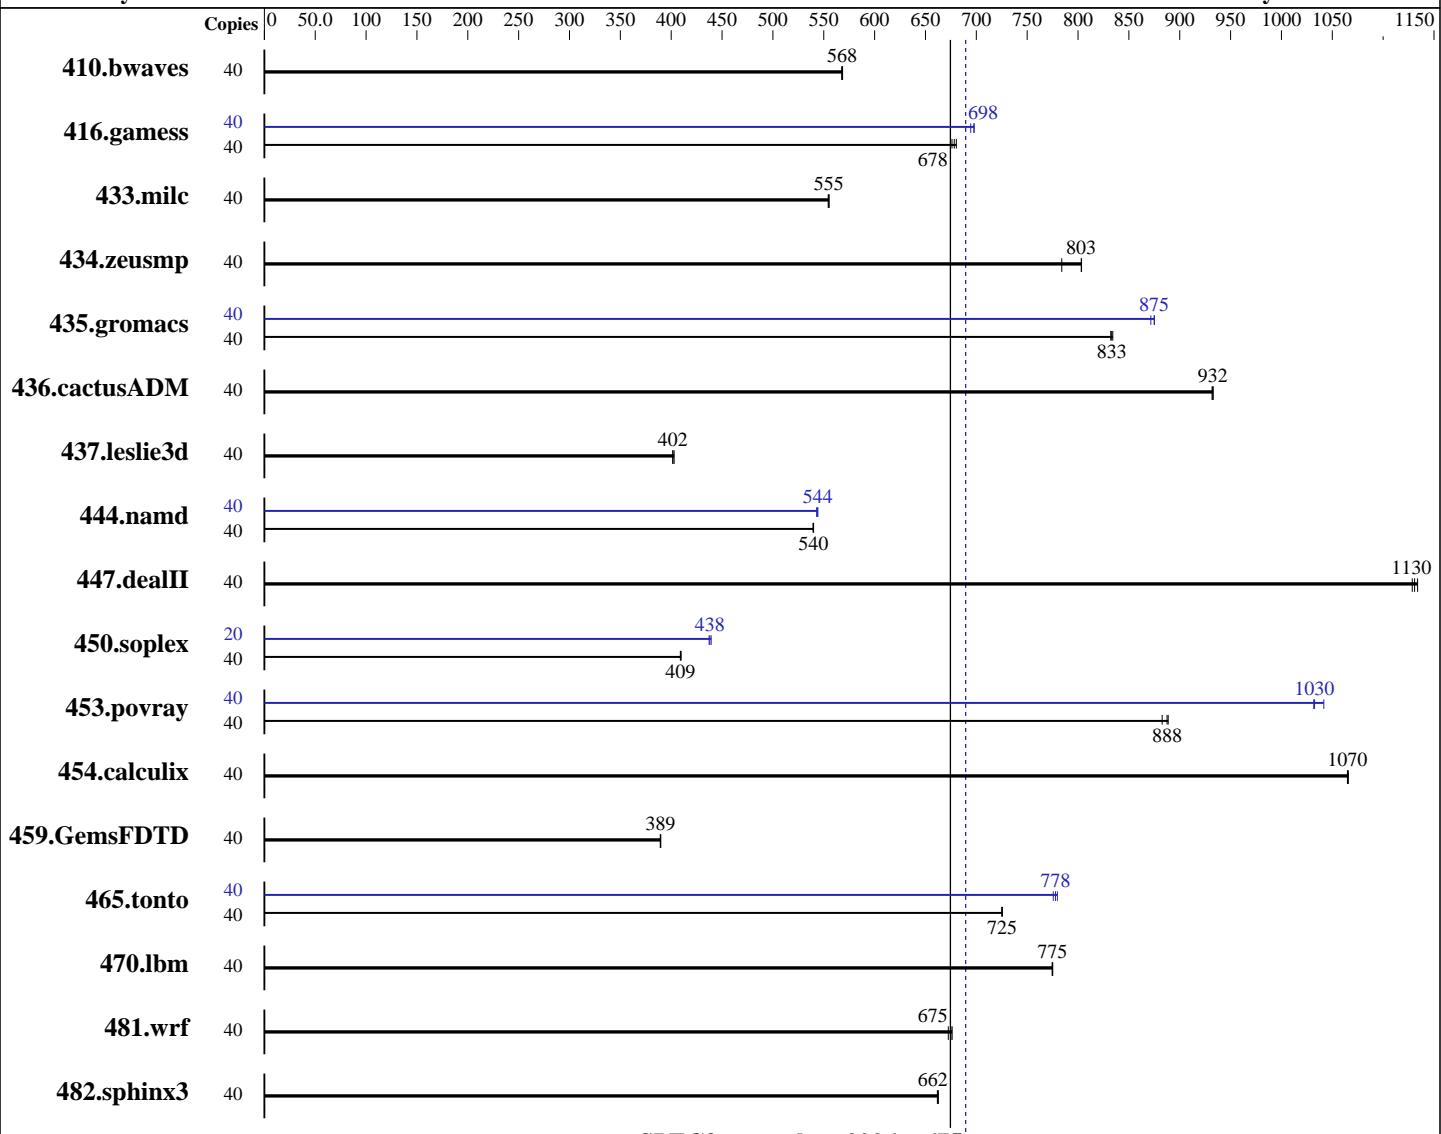

**SPECfp\_rate\_base2006 = 675**

**SPECfp\_rate2006 = 689**

## Hardware

CPU Name: Intel Xeon E5-2630 v4  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.10 GHz  
 CPU MHz: 2200  
 FPU: Integrated  
 CPU(s) enabled: 20 cores, 2 chips, 10 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

## Software

Operating System: SUSE Linux Enterprise Server 12 SP1 3.12.49-11-default  
 Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux;  
 Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4  
 System State: Run level 3 (multi-user)

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

**SPECfp\_rate2006 = 689**

Huawei CH220 V3(Intel Xeon E5-2630 v4)

**SPECfp\_rate\_base2006 = 675**

CPU2006 license: 3175

Test date: Dec-2016

Test sponsor: Huawei

Hardware Availability: Mar-2016

Tested by: Huawei

Software Availability: Dec-2015

L3 Cache: 25 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 256 GB (16 x 16 GB 2Rx8 PC4-2400T-R, running at 2133 MHz)  
 Disk Subsystem: 1 x 1000 GB SATA, 7200 RPM  
 Other Hardware: None

Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	40	958	568	956	569	<b>957</b>	<b>568</b>	40	958	568	956	569	<b>957</b>	<b>568</b>		
416.gamess	40	1158	676	1151	680	<b>1155</b>	<b>678</b>	40	1122	698	<b>1123</b>	<b>698</b>	1128	694		
433.milc	40	661	555	662	554	<b>662</b>	<b>555</b>	40	661	555	662	554	<b>662</b>	<b>555</b>		
434.zeusmp	40	<b>453</b>	<b>803</b>	464	784	453	803	40	<b>453</b>	<b>803</b>	464	784	453	803		
435.gromacs	40	342	834	343	832	<b>343</b>	<b>833</b>	40	<b>326</b>	<b>875</b>	328	872	326	875		
436.cactusADM	40	513	932	<b>513</b>	<b>932</b>	512	933	40	513	932	<b>513</b>	<b>932</b>	512	933		
437.leslie3d	40	<b>936</b>	<b>402</b>	933	403	936	401	40	<b>936</b>	<b>402</b>	933	403	936	401		
444.namd	40	<b>594</b>	<b>540</b>	595	539	594	540	40	<b>591</b>	<b>543</b>	<b>590</b>	<b>544</b>	590	544		
447.dealII	40	405	1130	<b>405</b>	<b>1130</b>	404	1130	40	405	1130	<b>405</b>	<b>1130</b>	404	1130		
450.soplex	40	<b>815</b>	<b>409</b>	814	410	816	409	20	<b>381</b>	<b>438</b>	381	437	380	439		
453.povray	40	241	883	239	889	<b>240</b>	<b>888</b>	40	206	1030	204	1040	<b>206</b>	<b>1030</b>		
454.calculix	40	310	1060	310	1070	<b>310</b>	<b>1070</b>	40	310	1060	310	1070	<b>310</b>	<b>1070</b>		
459.GemsFDTD	40	<b>1090</b>	<b>389</b>	1090	389	1089	390	40	<b>1090</b>	<b>389</b>	1090	389	1089	390		
465.tonto	40	543	725	<b>543</b>	<b>725</b>	542	726	40	507	776	<b>506</b>	<b>778</b>	505	780		
470.lbm	40	709	775	709	775	<b>709</b>	<b>775</b>	40	709	775	709	775	<b>709</b>	<b>775</b>		
481.wrf	40	661	676	<b>662</b>	<b>675</b>	664	672	40	661	676	<b>662</b>	<b>675</b>	664	672		
482.sphinx3	40	1177	663	<b>1177</b>	<b>662</b>	1178	662	40	1177	663	<b>1177</b>	<b>662</b>	1178	662		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS configuration:

Set Power Efficiency Mode to Performance

Set Snoop Mode to ES mode

Set Patrol Scrub to Disable

Sysinfo program /spec16/config/sysinfo.rev6914  
Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

**SPECfp\_rate2006 = 689**

Huawei CH220 V3(Intel Xeon E5-2630 v4)

**SPECfp\_rate\_base2006 = 675**

**CPU2006 license:** 3175

**Test date:** Dec-2016

**Test sponsor:** Huawei

**Hardware Availability:** Mar-2016

**Tested by:** Huawei

**Software Availability:** Dec-2015

## Platform Notes (Continued)

\$Rev: 6914 \$ \$Date::: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1  
running on linux-suqd Tue Dec 6 06:54:58 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
    model name : Intel(R) Xeon(R) CPU E5-2630 v4 @ 2.20GHz
        2 "physical id"s (chips)
        40 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
    cpu cores : 10
    siblings : 20
    physical 0: cores 0 1 2 3 4 8 9 10 11 12
    physical 1: cores 0 1 2 3 4 8 9 10 11 12
cache size : 25600 KB
```

```
From /proc/meminfo
    MemTotal:       264074592 kB
    HugePages_Total:      0
    Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
    SUSE Linux Enterprise Server 12 SP1
```

```
From /etc/*release* /etc/*version*
SuSE-release:
    SUSE Linux Enterprise Server 12 (x86_64)
    VERSION = 12
    PATCHLEVEL = 1
    # This file is deprecated and will be removed in a future service pack or
    release.
    # Please check /etc/os-release for details about this release.
os-release:
    NAME="SLES"
    VERSION="12-SP1"
    VERSION_ID="12.1"
    PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
    ID="sles"
    ANSI_COLOR="0;32"
    CPE_NAME="cpe:/o:suse:sles:12:sp1"
```

```
uname -a:
    Linux linux-suqd 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015
    (8d714a0) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Dec 4 11:37
```

```
SPEC is set to: /spec16
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

Huawei CH220 V3(Intel Xeon E5-2630 v4)

**SPECfp\_rate2006 = 689**

CPU2006 license: 3175

Test date: Dec-2016

Test sponsor: Huawei

Hardware Availability: Mar-2016

Tested by: Huawei

Software Availability: Dec-2015

## Platform Notes (Continued)

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda3	ext4	884G	82G	801G	10%	/

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Insyde Corp. 3.31 08/22/2016

Memory:

16x Hynix HMA82GR7AFR8N-UH 16 GB 2 rank 2400 MHz, configured at 2133 MHz

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/spec16/libs/32:/spec16/libs/64:/spec16/sh"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop\_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

**Huawei**

Huawei CH220 V3(Intel Xeon E5-2630 v4)

**SPECfp\_rate2006 = 689**

**CPU2006 license:** 3175

**Test date:** Dec-2016

**Test sponsor:** Huawei

**Hardware Availability:** Mar-2016

**Tested by:** Huawei

**Software Availability:** Dec-2015

**SPECfp\_rate\_base2006 = 675**

## Base Portability Flags (Continued)

```

416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

```

## Base Optimization Flags

C benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

C++ benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

Fortran benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

```

Benchmarks using both Fortran and C:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

## Peak Compiler Invocation

C benchmarks:

```

icc -m64

```

C++ benchmarks (except as noted below):

```

icpc -m64

```

```

450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

```

Fortran benchmarks:

```

ifort -m64

```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

Huawei CH220 V3(Intel Xeon E5-2630 v4)

**SPECfp\_rate2006 = 689**

**SPECfp\_rate\_base2006 = 675**

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Dec-2016

Hardware Availability: Mar-2016

Software Availability: Dec-2015

## Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
  433.milc: -DSPEC_CPU_LP64
  434.zeusmp: -DSPEC_CPU_LP64
  435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
  437.leslie3d: -DSPEC_CPU_LP64
    444.namd: -DSPEC_CPU_LP64
    447.dealII: -DSPEC_CPU_LP64
  450.soplex: -D_FILE_OFFSET_BITS=64
  453.povray: -DSPEC_CPU_LP64
  454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
  465.tonto: -DSPEC_CPU_LP64
  470.lbm: -DSPEC_CPU_LP64
    481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
  482.sphinx3: -DSPEC_CPU_LP64
```

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

```
444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
  -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
  -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
  -prof-use(pass 2) -fno-alias -auto-ilp32
```

447.dealII: basepeak = yes

```
450.soplex: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
  -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
  -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
  -prof-use(pass 2) -opt-malloc-options=3
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

Huawei CH220 V3(Intel Xeon E5-2630 v4)

**SPECfp\_rate2006 = 689**

CPU2006 license: 3175

Test date: Dec-2016

Test sponsor: Huawei

Hardware Availability: Mar-2016

Tested by: Huawei

Software Availability: Dec-2015

## Peak Optimization Flags (Continued)

```
453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
             -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
             -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
             -prof-use(pass 2) -unroll4 -ansi-alias
```

Fortran benchmarks:

```
410.bwaves: basepeak = yes
```

```
416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
             -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
             -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2
             -inline-level=0 -scalar-rep-
```

```
434.zeusmp: basepeak = yes
```

```
437.leslie3d: basepeak = yes
```

```
459.GemsFDTD: basepeak = yes
```

```
465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
             -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
             -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4 -auto
             -inline-calloc -opt-malloc-options=3
```

Benchmarks using both Fortran and C:

```
435.gromacs: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
              -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
              -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
              -prof-use(pass 2) -opt-prefetch -auto-ilp32
```

```
436.cactusADM: basepeak = yes
```

```
454.calculix: basepeak = yes
```

```
481.wrf: basepeak = yes
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>  
<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-BDW-V1.0.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>  
<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-BDW-V1.0.xml>



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

**SPECfp\_rate2006 = 689**

Huawei CH220 V3(Intel Xeon E5-2630 v4)

**SPECfp\_rate\_base2006 = 675**

**CPU2006 license:** 3175

**Test date:** Dec-2016

**Test sponsor:** Huawei

**Hardware Availability:** Mar-2016

**Tested by:** Huawei

**Software Availability:** Dec-2015

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Dec 28 10:52:12 2016 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 27 December 2016.