



# SPEC® CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise  
(Test Sponsor: HPE)

ProLiant BL460c Gen10  
(1.70 GHz, Intel Xeon Bronze 3106)

**SPECint®\_rate2006 = Not Run**

**SPECint\_rate\_base2006 = 327**

**CPU2006 license:** 3


**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Dec-2017

**Hardware Availability:** Oct-2017

**Software Availability:** Sep-2017

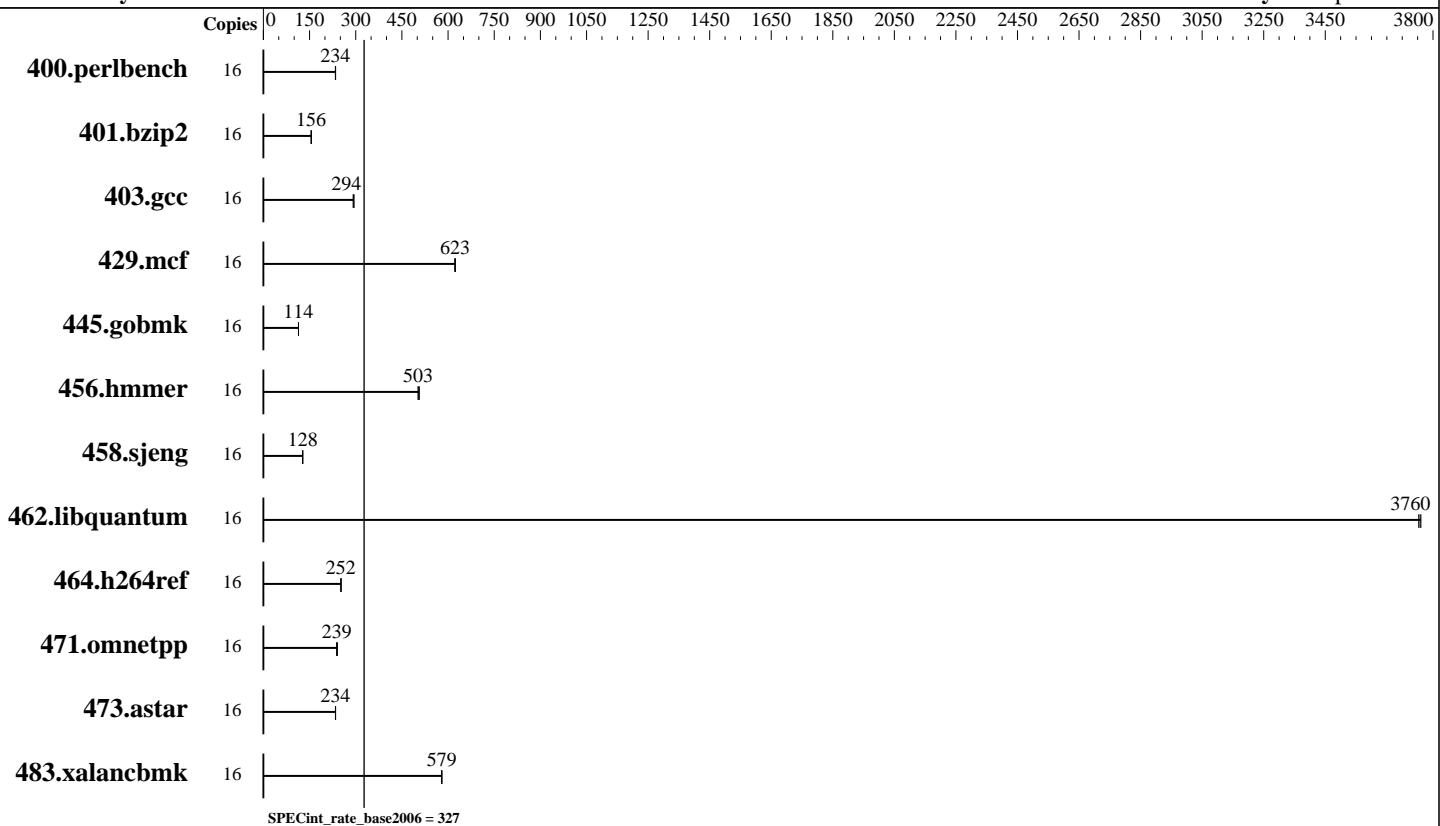

## Hardware

CPU Name: Intel Xeon Bronze 3106  
CPU Characteristics:  
CPU MHz: 1700  
FPU: Integrated  
CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip  
CPU(s) orderable: 1, 2 chip(s)  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 1 MB I+D on chip per core  
L3 Cache: 11 MB I+D on chip per chip  
Other Cache: None  
Memory: 192 GB (12 x 16 GB 2Rx8 PC4-2666V-R, running at 2133)  
Disk Subsystem: 1 x 480 GB SATA SSD, RAID 0  
Other Hardware: None

## Software

Operating System: SUSE Linux Enterprise Server 12 (x86\_64) SP2 Kernel 3.10.0-693.e17.x86\_64  
Compiler: C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux;  
Fortran: Version 17.0.3.191 of Intel Fortran Compiler for Linux  
Auto Parallel: No  
File System: xfs  
System State: Run level 3 (multi-user)  
Base Pointers: 32/64-bit  
Peak Pointers: Not Applicable  
Other Software: Microquill SmartHeap V10.2



# SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise  
(Test Sponsor: HPE)

ProLiant BL460c Gen10  
(1.70 GHz, Intel Xeon Bronze 3106)

**SPECint\_rate2006 = Not Run**

**SPECint\_rate\_base2006 = 327**

CPU2006 license: 3

Test date: Dec-2017

Test sponsor: HPE

Hardware Availability: Oct-2017

Tested by: HPE

Software Availability: Sep-2017

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	16	<b>667</b>	<b>234</b>	668	234	666	235							
401.bzip2	16	994	155	992	156	<b>993</b>	<b>156</b>							
403.gcc	16	442	292	<b>438</b>	<b>294</b>	438	294							
429.mcf	16	234	624	235	622	<b>234</b>	<b>623</b>							
445.gobmk	16	1471	114	1471	114	<b>1471</b>	<b>114</b>							
456.hmmer	16	295	507	<b>297</b>	<b>503</b>	297	503							
458.sjeng	16	1515	128	<b>1515</b>	<b>128</b>	1516	128							
462.libquantum	16	88.3	3750	88.2	3760	<b>88.2</b>	<b>3760</b>							
464.h264ref	16	<b>1405</b>	<b>252</b>	1403	252	1405	252							
471.omnetpp	16	416	240	<b>419</b>	<b>239</b>	420	238							
473.astar	16	<b>479</b>	<b>234</b>	480	234	479	235							
483.xalancbmk	16	190	580	<b>191</b>	<b>579</b>	191	579							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Transparent Huge Pages enabled by default  
Filesystem page cache cleared with:  
shell invocation of 'sync; echo 3 > /proc/sys/vm/drop\_caches' prior to run  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>  
irqbalance disabled with "systemctl stop irqbalance"  
tuned profile set with "tuned-adm profile throughput-performance"  
VM Dirty ratio was set to 40 using "echo 40 > /proc/sys/vm/dirty\_ratio"  
Numa balancing was disabled using "echo 0 > /proc/sys/kernel numa\_balancing"

## Platform Notes

### BIOS Configuration:

Thermal Configuration set to Maximum Cooling  
Memory Patrol Scrubbing set to Disabled  
LLC Prefetch set to Enabled  
LLC Dead Line Allocation set to Disabled  
Workload Profile set to General Throughput Compute  
Minimum Processor Idle Power Core C-State set to C1E State  
Workload Profile set to Custom

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant BL460c Gen10

(1.70 GHz, Intel Xeon Bronze 3106)

**SPECint\_rate2006 = Not Run**

**SPECint\_rate\_base2006 = 327**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Dec-2017

**Hardware Availability:** Oct-2017

**Software Availability:** Sep-2017

## Platform Notes (Continued)

Sub-NUMA Clustering set to Disabled  
Sysinfo program /home/cpu2006/config/sysinfo.rev6993  
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)  
running on linux-h3xn Thu Dec 14 15:41:43 2017

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) Bronze 3106 CPU @ 1.70GHz
        2 "physical id"s (chips)
        16 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 8
siblings : 8
physical 0: cores 0 1 2 3 4 5 6 7
physical 1: cores 0 1 2 3 4 5 6 7
cache size : 11264 KB
```

```
From /proc/meminfo
MemTotal:      197621936 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP2
```

```
From /etc/*release* /etc/*version*
SuSE-release:
        SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 2
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
        NAME="SLES"
VERSION="12-SP2"
VERSION_ID="12.2"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp2"
```

```
uname -a:
Linux linux-h3xn 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016
(9464f67) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Dec 14 15:39
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant BL460c Gen10

(1.70 GHz, Intel Xeon Bronze 3106)

**SPECint\_rate2006 = Not Run**

**SPECint\_rate\_base2006 = 327**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Dec-2017

**Hardware Availability:** Oct-2017

**Software Availability:** Sep-2017

## Platform Notes (Continued)

SPEC is set to: /home/cpu2006

Filesystem Type Size Used Avail Use% Mounted on  
/dev/sda4 xfs 405G 112G 293G 28% /home

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HPE I41 09/29/2017

Memory:

4x UNKNOWN NOT AVAILABLE

12x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2666 MHz, configured at 2133 MHz

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/home/cpu2006/lib/ia32:/home/cpu2006/lib/intel64:/home/cpu2006/sh10.2"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.2

No: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

No: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

No: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

This benchmark result is intended to provide perspective on past performance using the historical hardware and/or software described on this result page.

The system as described on this result page was formerly generally available. At the time of this publication, it may not be shipping, and/or may not be supported, and/or may fail to meet other tests of General Availability described in the SPEC OSG Policy document, <http://www.spec.org/osg/policy.htm>.

This measured result may not be representative of the result that would be measured were this benchmark run with hardware and software available as of the publication date.



# SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant BL460c Gen10

(1.70 GHz, Intel Xeon Bronze 3106)

**SPECint\_rate2006 = Not Run**

**SPECint\_rate\_base2006 = 327**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Dec-2017

**Hardware Availability:** Oct-2017

**Software Availability:** Sep-2017

## Base Compiler Invocation

C benchmarks:

```
icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32
```

C++ benchmarks:

```
icpc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32
```

## Base Portability Flags

```
400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32
401.bzip2: -D_FILE_OFFSET_BITS=64
403.gcc: -D_FILE_OFFSET_BITS=64
429.mcf: -D_FILE_OFFSET_BITS=64
445.gobmk: -D_FILE_OFFSET_BITS=64
456.hmmr: -D_FILE_OFFSET_BITS=64
458.sjeng: -D_FILE_OFFSET_BITS=64
462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
464.h264ref: -D_FILE_OFFSET_BITS=64
471.omnetpp: -D_FILE_OFFSET_BITS=64
473.astar: -D_FILE_OFFSET_BITS=64
483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
```

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-qopt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-qopt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh10.2 -lsmartheap
```

## Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html>

<http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revH.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml>

<http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revH.xml>



# SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant BL460c Gen10

(1.70 GHz, Intel Xeon Bronze 3106)

**SPECint\_rate2006 = Not Run**

**SPECint\_rate\_base2006 = 327**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Dec-2017

**Hardware Availability:** Oct-2017

**Software Availability:** Sep-2017

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jun 14 11:29:44 2018 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 13 June 2018.