



# SPEC® CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant BL460c Gen10

(2.10 GHz, Intel Xeon Gold 6130)

**SPECint®\_rate2006 = Not Run**

**SPECint\_rate\_base2006 = 1490**

**CPU2006 license:** 3


**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Dec-2017

**Hardware Availability:** Nov-2017

**Software Availability:** Apr-2017

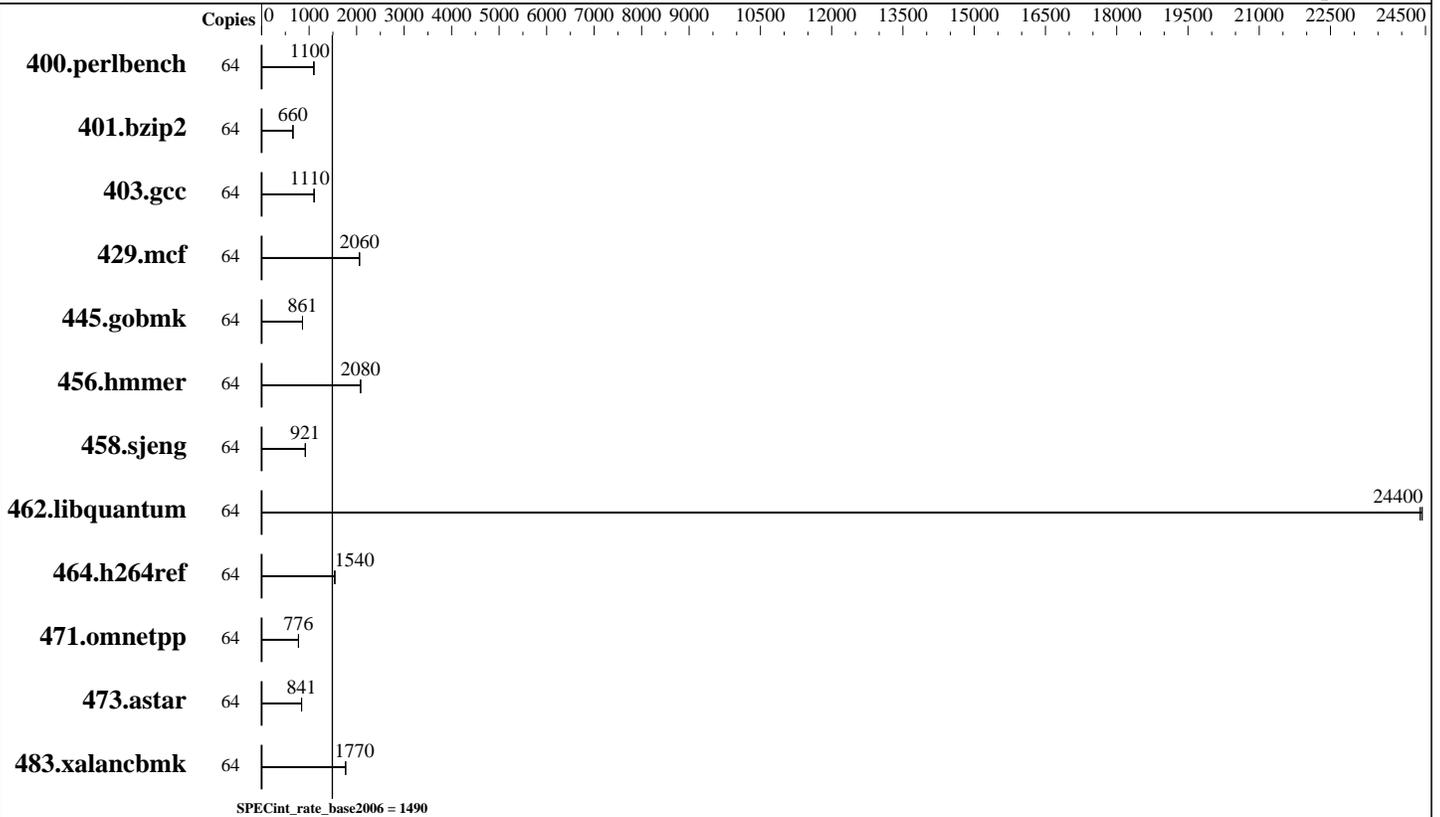

## Hardware

**CPU Name:** Intel Xeon Gold 6130  
**CPU Characteristics:** Intel Turbo Boost Technology up to 3.70 GHz  
**CPU MHz:** 2100  
**FPU:** Integrated  
**CPU(s) enabled:** 32 cores, 2 chips, 16 cores/chip, 2 threads/core  
**CPU(s) orderable:** 1, 2 chip(s)  
**Primary Cache:** 32 KB I + 32 KB D on chip per core  
**Secondary Cache:** 1 MB I+D on chip per core  
**L3 Cache:** 22 MB I+D on chip per chip  
**Other Cache:** None  
**Memory:** 192 GB (12 x 16 GB 2Rx8 PC4-2666V-R)  
**Disk Subsystem:** 1 x 480 GB SATA SSD, RAID 0  
**Other Hardware:** None

## Software

**Operating System:** SUSE Linux Enterprise Server 12 (x86\_64) SP3  
 Kernel 4.4.73-5-default  
**Compiler:** C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux  
**Auto Parallel:** No  
**File System:** xfs  
**System State:** Run level 3 (multi-user)  
**Base Pointers:** 32-bit  
**Peak Pointers:** Not Applicable  
**Other Software:** Microquill SmartHeap V10.2



# SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant BL460c Gen10

(2.10 GHz, Intel Xeon Gold 6130)

SPECint\_rate2006 = Not Run

SPECint\_rate\_base2006 = 1490

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Dec-2017

Hardware Availability: Nov-2017

Software Availability: Apr-2017

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	64	567	1100	<b><u>567</u></b>	<b><u>1100</u></b>	571	1090							
401.bzip2	64	941	656	934	661	<b><u>936</u></b>	<b><u>660</u></b>							
403.gcc	64	467	1100	465	1110	<b><u>465</u></b>	<b><u>1110</u></b>							
429.mcf	64	<b><u>283</u></b>	<b><u>2060</u></b>	284	2060	283	2060							
445.gobmk	64	<b><u>779</u></b>	<b><u>861</u></b>	779	861	781	860							
456.hammer	64	286	2090	287	2080	<b><u>287</u></b>	<b><u>2080</u></b>							
458.sjeng	64	<b><u>841</u></b>	<b><u>921</u></b>	841	920	841	921							
462.libquantum	64	54.3	24400	<b><u>54.3</u></b>	<b><u>24400</u></b>	54.4	24400							
464.h264ref	64	919	1540	<b><u>920</u></b>	<b><u>1540</u></b>	921	1540							
471.omnetpp	64	516	775	515	777	<b><u>516</u></b>	<b><u>776</u></b>							
473.astar	64	<b><u>534</u></b>	<b><u>841</u></b>	533	843	535	840							
483.xalancbmk	64	250	1770	250	1770	<b><u>250</u></b>	<b><u>1770</u></b>							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default
Filesystem page cache cleared with:
  shell invocation of 'sync; echo 3 > /proc/sys/vm/drop_caches' prior to run
runspec command invoked through numactl i.e.:
  numactl --interleave=all runspec <etc>
irqbalance disabled with "systemctl stop irqbalance"
tuned profile set with "tuned-adm profile throughput-performance"
VM Dirty ratio was set to 40 using "echo 40 > /proc/sys/vm/dirty_ratio"
Numa balancing was disabled using "echo 0 > /proc/sys/kernel/numa_balancing"
```

## Platform Notes

```
BIOS Configuration:
  Thermal Configuration set to Maximum Cooling
  Memory Patrol Scrubbing set to Disabled
  LLC Prefetch set to Enabled
  LLC Dead Line Allocation set to Disabled
  Workload Profile set to General Throughput Compute
  Minimum Processor Idle Power Core C-State set to C1E State
Sysinfo program /home/cpu2006/config/sysinfo.rev6993
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant BL460c Gen10  
(2.10 GHz, Intel Xeon Gold 6130)

SPECint\_rate2006 = Not Run

SPECint\_rate\_base2006 = 1490

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Dec-2017

Hardware Availability: Nov-2017

Software Availability: Apr-2017

## Platform Notes (Continued)

Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)  
running on bl460c107 Tue Dec 19 06:47:27 2017

This section contains SUT (System Under Test) info as seen by  
some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) Gold 6130 CPU @ 2.10GHz
 2 "physical id"s (chips)
 64 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 16
  siblings  : 32
  physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
  physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
cache size : 22528 KB
```

```
From /proc/meminfo
MemTotal:      197744368 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 3
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP3"
VERSION_ID="12.3"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp3"
```

```
uname -a:
Linux bl460c107 4.4.73-5-default #1 SMP Tue Jul 4 15:33:39 UTC 2017 (b7ce4e4)
x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Dec 19 06:46

```
SPEC is set to: /home/cpu2006
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4       xfs   300G  137G  164G  46% /home
```

Additional information from dmidecode:

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant BL460c Gen10  
(2.10 GHz, Intel Xeon Gold 6130)

**SPECint\_rate2006 = Not Run**

**SPECint\_rate\_base2006 = 1490**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Dec-2017

**Hardware Availability:** Nov-2017

**Software Availability:** Apr-2017

## Platform Notes (Continued)

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HPE I41 11/14/2017

Memory:

4x UNKNOWN NOT AVAILABLE

12x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2666 MHz

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/home/cpu2006/lib/ia32:/home/cpu2006/lib/intel64:/home/cpu2006/sh10.2"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM memory using Redhat Enterprise Linux 7.2

No: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

No: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

No: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

This benchmark result is intended to provide perspective on past performance using the historical hardware and/or software described on this result page.

The system as described on this result page was formerly generally available. At the time of this publication, it may not be shipping, and/or may not be supported, and/or may fail to meet other tests of General Availability described in the SPEC OSG Policy document, <http://www.spec.org/osg/policy.htm>.

This measured result may not be representative of the result that would be measured were this benchmark run with hardware and software available as of the publication date.

## Base Compiler Invocation

C benchmarks:

icc -m32 -L/opt/intel/compilers\_and\_libraries\_2017/linux/lib/ia32

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant BL460c Gen10  
(2.10 GHz, Intel Xeon Gold 6130)

SPECint\_rate2006 = Not Run

SPECint\_rate\_base2006 = 1490

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Dec-2017

Hardware Availability: Nov-2017

Software Availability: Apr-2017

## Base Compiler Invocation (Continued)

C++ benchmarks:

icpc -m32 -L/opt/intel/compilers\_and\_libraries\_2017/linux/lib/ia32

## Base Portability Flags

400.perlbench: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX\_IA32  
 401.bzip2: -D\_FILE\_OFFSET\_BITS=64  
 403.gcc: -D\_FILE\_OFFSET\_BITS=64  
 429.mcf: -D\_FILE\_OFFSET\_BITS=64  
 445.gobmk: -D\_FILE\_OFFSET\_BITS=64  
 456.hmmer: -D\_FILE\_OFFSET\_BITS=64  
 458.sjeng: -D\_FILE\_OFFSET\_BITS=64  
 462.libquantum: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX  
 464.h264ref: -D\_FILE\_OFFSET\_BITS=64  
 471.omnetpp: -D\_FILE\_OFFSET\_BITS=64  
 473.astar: -D\_FILE\_OFFSET\_BITS=64  
 483.xalancbmk: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-qopt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-qopt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh10.2 -lsmartheap

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html>

<http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revH.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml>

<http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revH.xml>



# SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant BL460c Gen10  
(2.10 GHz, Intel Xeon Gold 6130)

SPECint\_rate2006 = Not Run

SPECint\_rate\_base2006 = 1490

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Dec-2017

**Hardware Availability:** Nov-2017

**Software Availability:** Apr-2017

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jun 14 11:29:53 2018 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 13 June 2018.