



# SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR630  
(2.10 GHz, Intel Xeon Platinum 8170)

SPECrate2017\_fp\_base = 220

SPECrate2017\_fp\_peak = 223

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Oct-2017

Hardware Availability: Aug-2017

Software Availability: Sep-2017

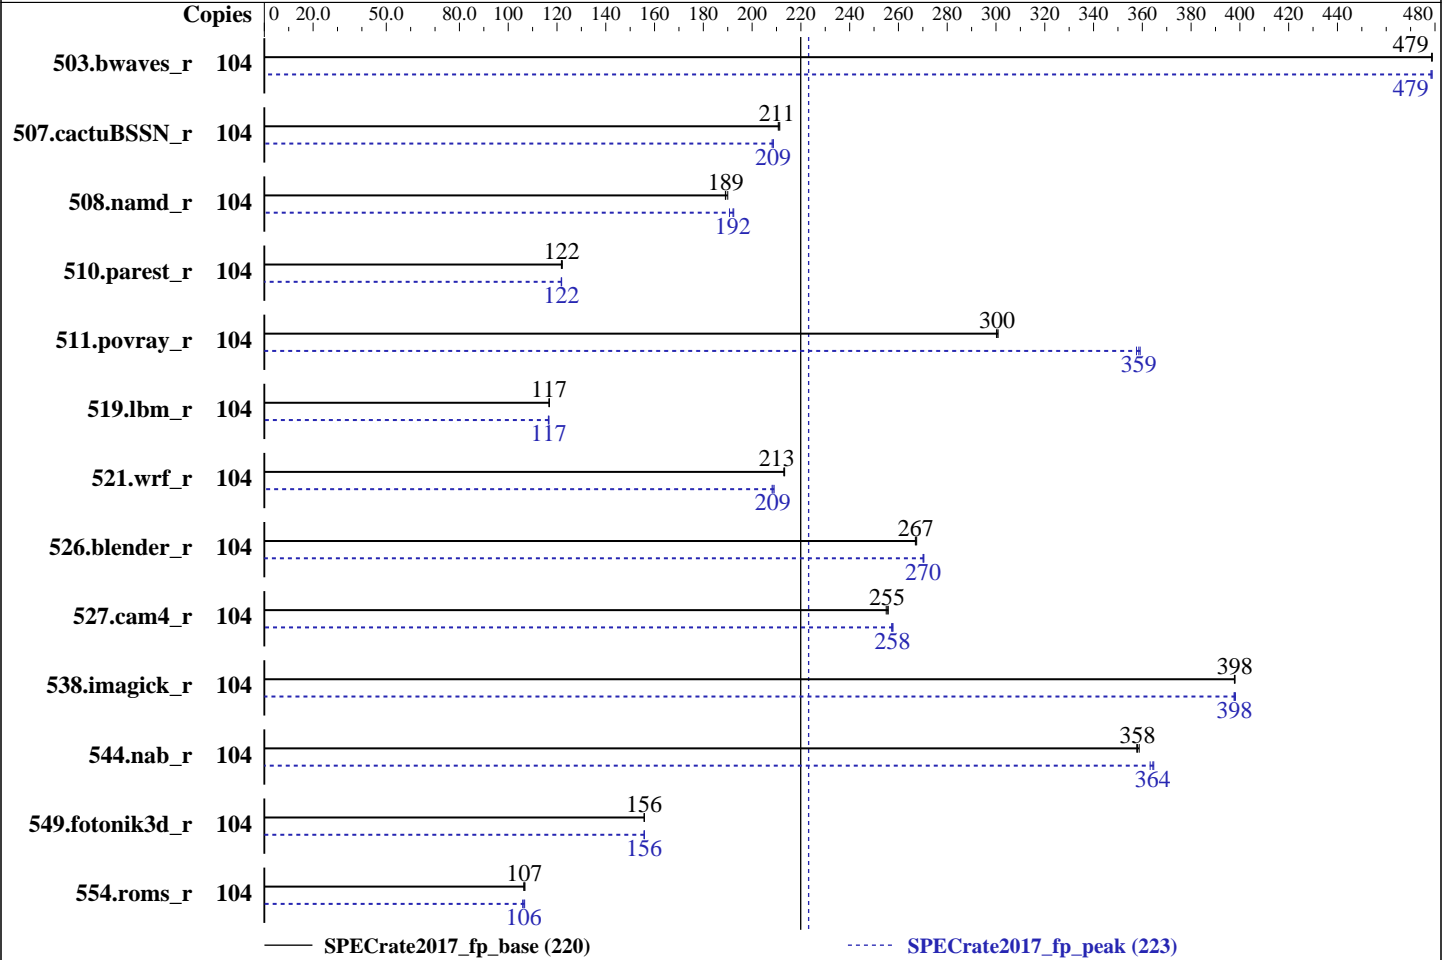

### Hardware

CPU Name: Intel Xeon Platinum 8170  
 Max MHz.: 3700  
 Nominal: 2100  
 Enabled: 52 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 35.75 MB I+D on chip per chip  
 Other: None  
 Memory: 384 GB (24 x 16 GB 2Rx8 PC4-2666V-R)  
 Storage: 1 x 800 GB SAS SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 12 SP2 (x86\_64)  
 Kernel 4.4.21-69-default  
 Compiler: C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux;  
 Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux  
 Parallel: No  
 Firmware: Lenovo BIOS Version IVE109Q 1.00 released Jun-2017  
 File System: btrfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR630  
(2.10 GHz, Intel Xeon Platinum 8170)

SPECrate2017\_fp\_base = 220

SPECrate2017\_fp\_peak = 223

CPU2017 License: 9017  
Test Sponsor: Lenovo Global Technology  
Tested by: Lenovo Global Technology

Test Date: Oct-2017  
Hardware Availability: Aug-2017  
Software Availability: Sep-2017

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	104	2178	479	2179	479	<b><u>2179</u></b>	<b><u>479</u></b>	104	2178	479	<b><u>2179</u></b>	<b><u>479</u></b>	2180	478
507.cactuBSSN_r	104	<b><u>624</u></b>	<b><u>211</u></b>	625	211	623	211	104	631	209	632	208	<b><u>631</u></b>	<b><u>209</u></b>
508.namd_r	104	523	189	<b><u>522</u></b>	<b><u>189</u></b>	520	190	104	513	192	518	191	<b><u>514</u></b>	<b><u>192</u></b>
510.parest_r	104	<b><u>2231</u></b>	<b><u>122</u></b>	2234	122	2227	122	104	2235	122	2232	122	<b><u>2233</u></b>	<b><u>122</u></b>
511.povray_r	104	809	300	<b><u>808</u></b>	<b><u>300</u></b>	807	301	104	679	358	<b><u>677</u></b>	<b><u>359</u></b>	676	359
519.lbm_r	104	938	117	<b><u>938</u></b>	<b><u>117</u></b>	939	117	104	940	117	941	116	<b><u>940</u></b>	<b><u>117</u></b>
521.wrf_r	104	<b><u>1093</u></b>	<b><u>213</u></b>	1093	213	1092	213	104	<b><u>1117</u></b>	<b><u>209</u></b>	1114	209	1119	208
526.blender_r	104	<b><u>593</u></b>	<b><u>267</u></b>	593	267	592	267	104	586	270	586	270	<b><u>586</u></b>	<b><u>270</u></b>
527.cam4_r	104	711	256	<b><u>712</u></b>	<b><u>255</u></b>	713	255	104	706	258	<b><u>706</u></b>	<b><u>258</u></b>	707	257
538.imagick_r	104	650	398	<b><u>650</u></b>	<b><u>398</u></b>	650	398	104	<b><u>650</u></b>	<b><u>398</u></b>	650	398	650	398
544.nab_r	104	<b><u>489</u></b>	<b><u>358</u></b>	489	358	488	359	104	482	363	<b><u>480</u></b>	<b><u>364</u></b>	480	365
549.fotonik3d_r	104	2601	156	<b><u>2601</u></b>	<b><u>156</u></b>	2602	156	104	2602	156	2601	156	<b><u>2602</u></b>	<b><u>156</u></b>
554.roms_r	104	1546	107	1554	106	<b><u>1550</u></b>	<b><u>107</u></b>	104	1548	107	<b><u>1553</u></b>	<b><u>106</u></b>	1560	106

SPECrate2017\_fp\_base = 220

SPECrate2017\_fp\_peak = 223

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH = "/home/cpu2017.1.0.2.ic18.0/lib/ia32:/home/cpu2017.1.0.2.ic18.0/lib/intel64"
LD_LIBRARY_PATH = "$LD_LIBRARY_PATH:/home/cpu2017.1.0.2.ic18.0/je5.0.1-32:/home/cpu2017.1.0.2.ic18.0/je5.0.1-64"
```

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.4  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate2017\_fp\_base = 220

ThinkSystem SR630  
(2.10 GHz, Intel Xeon Platinum 8170)

SPECrate2017\_fp\_peak = 223

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Oct-2017  
**Hardware Availability:** Aug-2017  
**Software Availability:** Sep-2017

### Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance

SNC set to Enable

Hardware Prefetcher set to Disable

MONITORMWAIT set to Enable

Execute Disable Bit set to Disable

Trusted Execution Technology set to Enable

Stale AtoS set to Enable

LLC Deadline Alloc set to Disable

    Sysinfo program /home/cpu2017.1.0.2.ic18.0/bin/sysinfo

    Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f

    running on Cable-SPECcpu2017-SUSE12SP2 Tue Oct 24 16:23:47 2017

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

    model name : Intel(R) Xeon(R) Platinum 8170 CPU @ 2.10GHz

        2 "physical id"s (chips)

        104 "processors"

    cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

        cpu cores : 26

        siblings : 52

        physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25 26 27 28 29

        physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25 26 27 28 29

From lscpu:

Architecture: x86\_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 104

On-line CPU(s) list: 0-103

Thread(s) per core: 2

Core(s) per socket: 26

Socket(s): 2

NUMA node(s): 4

Vendor ID: GenuineIntel

CPU family: 6

Model: 85

Model name: Intel(R) Xeon(R) Platinum 8170 CPU @ 2.10GHz

Stepping: 4

CPU MHz: 2095.096

BogoMIPS: 4190.19

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate2017\_fp\_base = 220

ThinkSystem SR630  
(2.10 GHz, Intel Xeon Platinum 8170)

SPECrate2017\_fp\_peak = 223

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Oct-2017  
**Hardware Availability:** Aug-2017  
**Software Availability:** Sep-2017

### Platform Notes (Continued)

```

Virtualization:      VT-x
L1d cache:          32K
L1i cache:          32K
L2 cache:           1024K
L3 cache:           36608K
NUMA node0 CPU(s):  0-3,7-9,13-15,20-22,52-55,59-61,65-67,72-74
NUMA node1 CPU(s):  4-6,10-12,16-19,23-25,56-58,62-64,68-71,75-77
NUMA node2 CPU(s):  26-29,33-35,39-41,46-48,78-81,85-87,91-93,98-100
NUMA node3 CPU(s):  30-32,36-38,42-45,49-51,82-84,88-90,94-97,101-103
Flags:               fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb pln pts dtherm intel_pt
tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2
erms invpcid rtm cqm mpx avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd
avx512bw avx512vl xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc

```

```

/proc/cpuinfo cache data
cache size : 36608 KB

```

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.
available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 7 8 9 13 14 15 20 21 22 52 53 54 55 59 60 61 65 66 67 72 73 74
node 0 size: 96355 MB
node 0 free: 95533 MB
node 1 cpus: 4 5 6 10 11 12 16 17 18 19 23 24 25 56 57 58 62 63 64 68 69 70 71 75 76 77
node 1 size: 96753 MB
node 1 free: 95848 MB
node 2 cpus: 26 27 28 29 33 34 35 39 40 41 46 47 48 78 79 80 81 85 86 87 91 92 93 98 99
100
node 2 size: 96753 MB
node 2 free: 96011 MB
node 3 cpus: 30 31 32 36 37 38 42 43 44 45 49 50 51 82 83 84 88 89 90 94 95 96 97 101
102 103
node 3 size: 96750 MB
node 3 free: 96081 MB
node distances:
node  0  1  2  3
  0:  10  11  21  21
  1:  11  10  21  21
  2:  21  21  10  11
  3:  21  21  11  10

```

From /proc/meminfo

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR630  
(2.10 GHz, Intel Xeon Platinum 8170)

SPECrate2017\_fp\_base = 220

SPECrate2017\_fp\_peak = 223

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Oct-2017  
**Hardware Availability:** Aug-2017  
**Software Availability:** Sep-2017

### Platform Notes (Continued)

MemTotal: 395891816 kB  
HugePages\_Total: 0  
Hugepagesize: 2048 kB

From /etc/\*release\* /etc/\*version\*

```
SuSE-release:
  SUSE Linux Enterprise Server 12 (x86_64)
  VERSION = 12
  PATCHLEVEL = 2
  # This file is deprecated and will be removed in a future service pack or release.
  # Please check /etc/os-release for details about this release.
```

```
os-release:
  NAME="SLES"
  VERSION="12-SP2"
  VERSION_ID="12.2"
  PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
  ID="sles"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:12:sp2"
```

```
uname -a:
Linux Cable-SPECcpu2017-SUSE12SP2 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC
2016 (9464f67) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Oct 24 05:30
```

```
SPEC is set to: /home/cpu2017.1.1.0.2.ic18.0
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/sda2       btrfs    744G  195G  548G  27% /home
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS Lenovo -[IVE109Q-1.00]- 06/28/2017
Memory:
  24x Samsung M393A2K43BB1-CTD 16 GB 2 rank 2666
```

(End of data from sysinfo program)

### Compiler Version Notes

```
=====
CC 519.lbm_r(base) 538.imagick_r(base, peak) 544.nab_r(base)
-----
icc (ICC) 18.0.0 20170811
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

ThinkSystem SR630  
(2.10 GHz, Intel Xeon Platinum 8170)

SPECrate2017\_fp\_base = 220

SPECrate2017\_fp\_peak = 223

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Oct-2017

**Hardware Availability:** Aug-2017

**Software Availability:** Sep-2017

## Compiler Version Notes (Continued)

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====  
CC 519.lbm\_r(peak) 544.nab\_r(peak)  
-----

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====  
CXXC 508.namd\_r(base) 510.parest\_r(base)  
-----

icpc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====  
CXXC 508.namd\_r(peak) 510.parest\_r(peak)  
-----

icpc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====  
CC 511.povray\_r(base) 526.blender\_r(base)  
-----

icpc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====  
CC 511.povray\_r(peak) 526.blender\_r(peak)  
-----

icpc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====  
FC 507.cactuBSSN\_r(base)  
-----

icpc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR630  
(2.10 GHz, Intel Xeon Platinum 8170)

SPECrate2017\_fp\_base = 220

SPECrate2017\_fp\_peak = 223

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Oct-2017  
**Hardware Availability:** Aug-2017  
**Software Availability:** Sep-2017

### Compiler Version Notes (Continued)

icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
ifort (IFORT) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====  
FC 507.cactuBSSN\_r(peak)

=====  
icpc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
ifort (IFORT) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====  
FC 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak) 554.roms\_r(base)

=====  
ifort (IFORT) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====  
FC 554.roms\_r(peak)

=====  
ifort (IFORT) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====  
CC 521.wrf\_r(base) 527.cam4\_r(base)

=====  
ifort (IFORT) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====  
CC 521.wrf\_r(peak) 527.cam4\_r(peak)

=====  
ifort (IFORT) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

ThinkSystem SR630  
(2.10 GHz, Intel Xeon Platinum 8170)

SPECrate2017\_fp\_base = 220

SPECrate2017\_fp\_peak = 223

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Oct-2017

**Hardware Availability:** Aug-2017

**Software Availability:** Sep-2017

## Compiler Version Notes (Continued)

---

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using both C and C++:

icpc icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64  
507.cactuBSSN\_r: -DSPEC\_LP64  
508.namd\_r: -DSPEC\_LP64  
510.parest\_r: -DSPEC\_LP64  
511.povray\_r: -DSPEC\_LP64  
519.lbm\_r: -DSPEC\_LP64  
521.wrf\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
526.blender\_r: -DSPEC\_LP64 -DSPEC\_LINUX -funsigned-char  
527.cam4\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG  
538.imagick\_r: -DSPEC\_LP64  
544.nab\_r: -DSPEC\_LP64  
549.fotonik3d\_r: -DSPEC\_LP64  
554.roms\_r: -DSPEC\_LP64





# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

ThinkSystem SR630  
(2.10 GHz, Intel Xeon Platinum 8170)

SPECrate2017\_fp\_base = 220

SPECrate2017\_fp\_peak = 223

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Oct-2017

**Hardware Availability:** Aug-2017

**Software Availability:** Sep-2017

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
```

Benchmarks using both C and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
```

## Base Other Flags

C benchmarks:

```
-m64 -std=c11
```

C++ benchmarks:

```
-m64
```

Fortran benchmarks:

```
-m64
```

Benchmarks using both Fortran and C:

```
-m64 -std=c11
```

Benchmarks using both C and C++:

```
-m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c11
```



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

ThinkSystem SR630  
(2.10 GHz, Intel Xeon Platinum 8170)

SPECrate2017\_fp\_base = 220

SPECrate2017\_fp\_peak = 223

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Oct-2017

**Hardware Availability:** Aug-2017

**Software Availability:** Sep-2017

## Peak Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using both C and C++:

icpc icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

519.lbm\_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3

538.imagick\_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3

544.nab\_r: Same as 519.lbm\_r

C++ benchmarks:

-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3

Fortran benchmarks:

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

ThinkSystem SR630  
(2.10 GHz, Intel Xeon Platinum 8170)

SPECrate2017\_fp\_base = 220

SPECrate2017\_fp\_peak = 223

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Oct-2017

Hardware Availability: Aug-2017

Software Availability: Sep-2017

## Peak Optimization Flags (Continued)

503.bwaves\_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3  
-nostandard-realloc-lhs -align array32byte

549.fotonik3d\_r: Same as 503.bwaves\_r

554.roms\_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs  
-align array32byte

Benchmarks using both Fortran and C:

-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

Benchmarks using both C and C++:

-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3

Benchmarks using Fortran, C, and C++:

-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

## Peak Other Flags

C benchmarks:

-m64 -std=c11

C++ benchmarks:

-m64

Fortran benchmarks:

-m64

Benchmarks using both Fortran and C:

-m64 -std=c11

Benchmarks using both C and C++:

-m64 -std=c11

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

ThinkSystem SR630  
(2.10 GHz, Intel Xeon Platinum 8170)

SPECrate2017\_fp\_base = 220

SPECrate2017\_fp\_peak = 223

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Oct-2017

**Hardware Availability:** Aug-2017

**Software Availability:** Sep-2017

## Peak Other Flags (Continued)

Benchmarks using Fortran, C, and C++:

-m64 -std=c11

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-Flags-V1.2-SKL-F.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-Flags-V1.2-SKL-F.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.2 on 2017-10-24 04:23:47-0400.

Report generated on 2018-10-31 16:04:52 by CPU2017 PDF formatter v6067.

Originally published on 2017-12-21.