



SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 480 Gen10

(3.0 GHz, Intel Xeon Platinum 8158)

SPECrate2017_fp_base = 158

SPECrate2017_fp_peak = Not Run

CPU2017 License: 3


Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2017

Hardware Availability: Nov-2017

Software Availability: Sep-2017

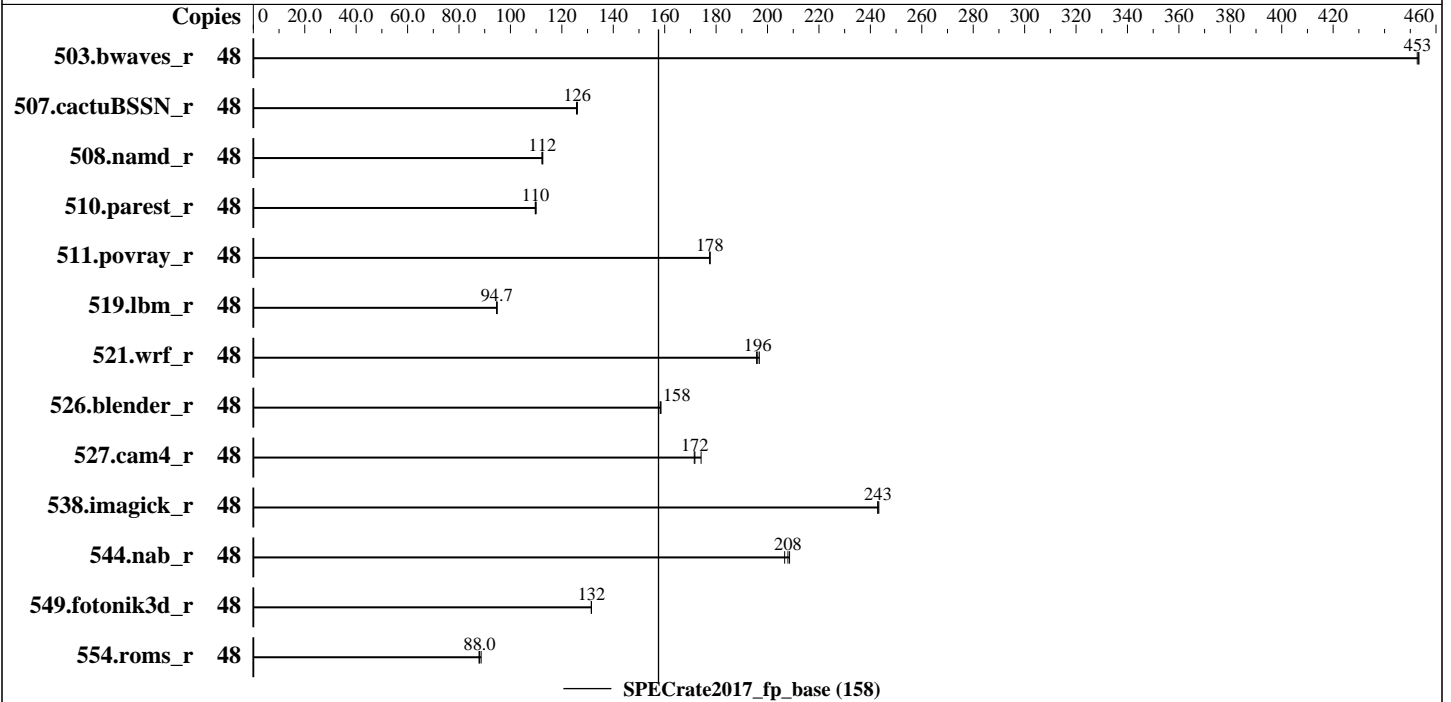

Hardware

CPU Name: Intel Xeon Platinum 8158
 Max MHz.: 3700
 Nominal: 3000
 Enabled: 24 cores, 2 chips, 2 threads/core
 Orderable: 1, 2 chip(s)
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 24.75 MB I+D on chip per chip
 Other: None
 Memory: 384 GB (24 x 16 GB 2Rx8 PC4-2666V-R)
 Storage: 1 x 480 GB SATA SSD, RAID 0
 Other: None

Software

OS: SUSE Linux Enterprise Server 12 (x86_64) SP2
 Kernel 4.4.21-69-default
 Compiler: C/C++: Version 18.0.0.128 of Intel C/C++
 Compiler for Linux;
 Fortran: Version 18.0.0.128 of Intel Fortran
 Compiler for Linux
 Parallel: No
 Firmware: HPE BIOS Version I42 released Nov-2017 (tested with I42 11/14/2017)
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: None



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 480 Gen10

(3.0 GHz, Intel Xeon Platinum 8158)

SPECrate2017_fp_base = 158

SPECrate2017_fp_peak = Not Run

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Nov-2017
Hardware Availability: Nov-2017
Software Availability: Sep-2017

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	48	1062	453	1063	453	1062	453							
507.cactuBSSN_r	48	482	126	483	126	482	126							
508.namd_r	48	405	112	406	112	405	113							
510.parest_r	48	1141	110	1144	110	1145	110							
511.povray_r	48	631	178	631	178	631	178							
519.lbm_r	48	534	94.7	534	94.7	534	94.8							
521.wrf_r	48	546	197	549	196	548	196							
526.blender_r	48	461	158	462	158	461	159							
527.cam4_r	48	489	172	482	174	490	172							
538.imagick_r	48	491	243	492	243	491	243							
544.nab_r	48	387	209	389	208	391	207							
549.fotonik3d_r	48	1423	131	1422	132	1422	132							
554.roms_r	48	861	88.6	867	88.0	869	87.8							

SPECrate2017_fp_base = 158

SPECrate2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
irqbalance disabled with "service irqbalance stop"
tuned profile set with "tuned-adm profile throughput-performance"
VM Dirty ratio was set to 40 using "echo 40 > /proc/sys/vm/dirty_ratio"
Numa balancing was disabled using "echo 0 > /proc/sys/kernel/numa_balancing"
```

General Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32:/home/cpu2017/je5.0.1-64"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 480 Gen10

(3.0 GHz, Intel Xeon Platinum 8158)

SPECrate2017_fp_base = 158

SPECrate2017_fp_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2017

Hardware Availability: Nov-2017

Software Availability: Sep-2017

General Notes (Continued)

memory using Redhat Enterprise Linux 7.4

Platform Notes

BIOS Configuration:

Thermal Configuration set to Maximum Cooling

Memory Patrol Scrubbing set to Disabled

LLC Prefetch set to Enabled

LLC Dead Line Allocation set to Disabled

Workload Profile set to General Throughput Compute

Minimum Processor Idle Power Core C-State set to C1E State

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f

running on sy480_m3_sles Tue Nov 28 23:51:13 2017

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Platinum 8158 CPU @ 3.00GHz

2 "physical id"s (chips)

48 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 12

siblings : 24

physical 0: cores 0 1 2 3 4 9 10 16 18 19 25 26

physical 1: cores 0 1 2 3 4 9 10 16 18 19 25 26

From lscpu:

Architecture: x86_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 48

On-line CPU(s) list: 0-47

Thread(s) per core: 2

Core(s) per socket: 12

Socket(s): 2

NUMA node(s): 4

Vendor ID: GenuineIntel

CPU family: 6

Model: 85

Model name: Intel(R) Xeon(R) Platinum 8158 CPU @ 3.00GHz

Stepping: 4

CPU MHz: 2992.976

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 480 Gen10

(3.0 GHz, Intel Xeon Platinum 8158)

SPECrate2017_fp_base = 158

SPECrate2017_fp_peak = Not Run

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Nov-2017
Hardware Availability: Nov-2017
Software Availability: Sep-2017

Platform Notes (Continued)

```

BogoMIPS:          5985.95
Virtualization:    VT-x
L1d cache:         32K
L1i cache:         32K
L2 cache:          1024K
L3 cache:          25344K
NUMA node0 CPU(s): 0-5,24-29
NUMA node1 CPU(s): 6-11,30-35
NUMA node2 CPU(s): 12-17,36-41
NUMA node3 CPU(s): 18-23,42-47
Flags:             fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb pln pts dtherm intel_pt
tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2
erms invpcid rtm cqm mpx avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd
avx512bw avx512vl xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc

```

```

/proc/cpuinfo cache data
cache size : 25344 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 4 5 24 25 26 27 28 29
node 0 size: 96349 MB
node 0 free: 95884 MB
node 1 cpus: 6 7 8 9 10 11 30 31 32 33 34 35
node 1 size: 96766 MB
node 1 free: 96331 MB
node 2 cpus: 12 13 14 15 16 17 36 37 38 39 40 41
node 2 size: 96766 MB
node 2 free: 96485 MB
node 3 cpus: 18 19 20 21 22 23 42 43 44 45 46 47
node 3 size: 96765 MB
node 3 free: 96486 MB
node distances:
node  0  1  2  3
 0:  10  21  31  31
 1:  21  10  31  31
 2:  31  31  10  21
 3:  31  31  21  10

```

```

From /proc/meminfo
MemTotal:      395926120 kB

```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 480 Gen10

(3.0 GHz, Intel Xeon Platinum 8158)

SPECrate2017_fp_base = 158

SPECrate2017_fp_peak = Not Run

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Nov-2017
Hardware Availability: Nov-2017
Software Availability: Sep-2017

Platform Notes (Continued)

HugePages_Total: 0
Hugepagesize: 2048 kB

From /etc/*release* /etc/*version*

SuSE-release:

SUSE Linux Enterprise Server 12 (x86_64)

VERSION = 12

PATCHLEVEL = 2

This file is deprecated and will be removed in a future service pack or release.

Please check /etc/os-release for details about this release.

os-release:

NAME="SLES"

VERSION="12-SP2"

VERSION_ID="12.2"

PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"

ID="sles"

ANSI_COLOR="0;32"

CPE_NAME="cpe:/o:suse:sles:12:sp2"

uname -a:

Linux sy480_m3_sles 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016 (9464f67)
x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Nov 28 23:48

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda4	xfs	405G	105G	300G	26%	/home

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HPE I42 11/14/2017

Memory:

24x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2666

(End of data from sysinfo program)

Compiler Version Notes

=====
CC 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 480 Gen10

(3.0 GHz, Intel Xeon Platinum 8158)

SPECrate2017_fp_base = 158

SPECrate2017_fp_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2017

Hardware Availability: Nov-2017

Software Availability: Sep-2017

Compiler Version Notes (Continued)

=====
CXXC 508.namd_r(base) 510.parest_r(base)
=====

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CC 511.povray_r(base) 526.blender_r(base)
=====

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
FC 507.cactuBSSN_r(base)
=====

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
FC 503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)
=====

ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CC 521.wrf_r(base) 527.cam4_r(base)
=====

ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 480 Gen10

(3.0 GHz, Intel Xeon Platinum 8158)

SPECrate2017_fp_base = 158

SPECrate2017_fp_peak = Not Run

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Nov-2017
Hardware Availability: Nov-2017
Software Availability: Sep-2017

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using both C and C++:

icpc icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 480 Gen10

(3.0 GHz, Intel Xeon Platinum 8158)

SPECrate2017_fp_base = 158

SPECrate2017_fp_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2017

Hardware Availability: Nov-2017

Software Availability: Sep-2017

Base Optimization Flags (Continued)

C++ benchmarks (continued):

`-qopt-mem-layout-trans=3`

Fortran benchmarks:

`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte`

Benchmarks using both Fortran and C:

`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte`

Benchmarks using both C and C++:

`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3`

Benchmarks using Fortran, C, and C++:

`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte`

Base Other Flags

C benchmarks:

`-m64 -std=c11`

C++ benchmarks:

`-m64`

Fortran benchmarks:

`-m64`

Benchmarks using both Fortran and C:

`-m64 -std=c11`

Benchmarks using both C and C++:

`-m64 -std=c11`

Benchmarks using Fortran, C, and C++:

`-m64 -std=c11`

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.html>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revH.html>



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 480 Gen10

(3.0 GHz, Intel Xeon Platinum 8158)

SPECrate2017_fp_base = 158

SPECrate2017_fp_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2017

Hardware Availability: Nov-2017

Software Availability: Sep-2017

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.xml>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revH.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2017-11-28 13:21:13-0500.

Report generated on 2018-10-31 17:13:43 by CPU2017 PDF formatter v6067.

Originally published on 2018-01-14.