



# SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR650  
(2.10 GHz, Intel Xeon Silver 4116)

**SPECrate2017\_fp\_base = 117**

**SPECrate2017\_fp\_peak = 120**

CPU2017 License: 9017


Test Date: Dec-2017

Test Sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Sep-2017

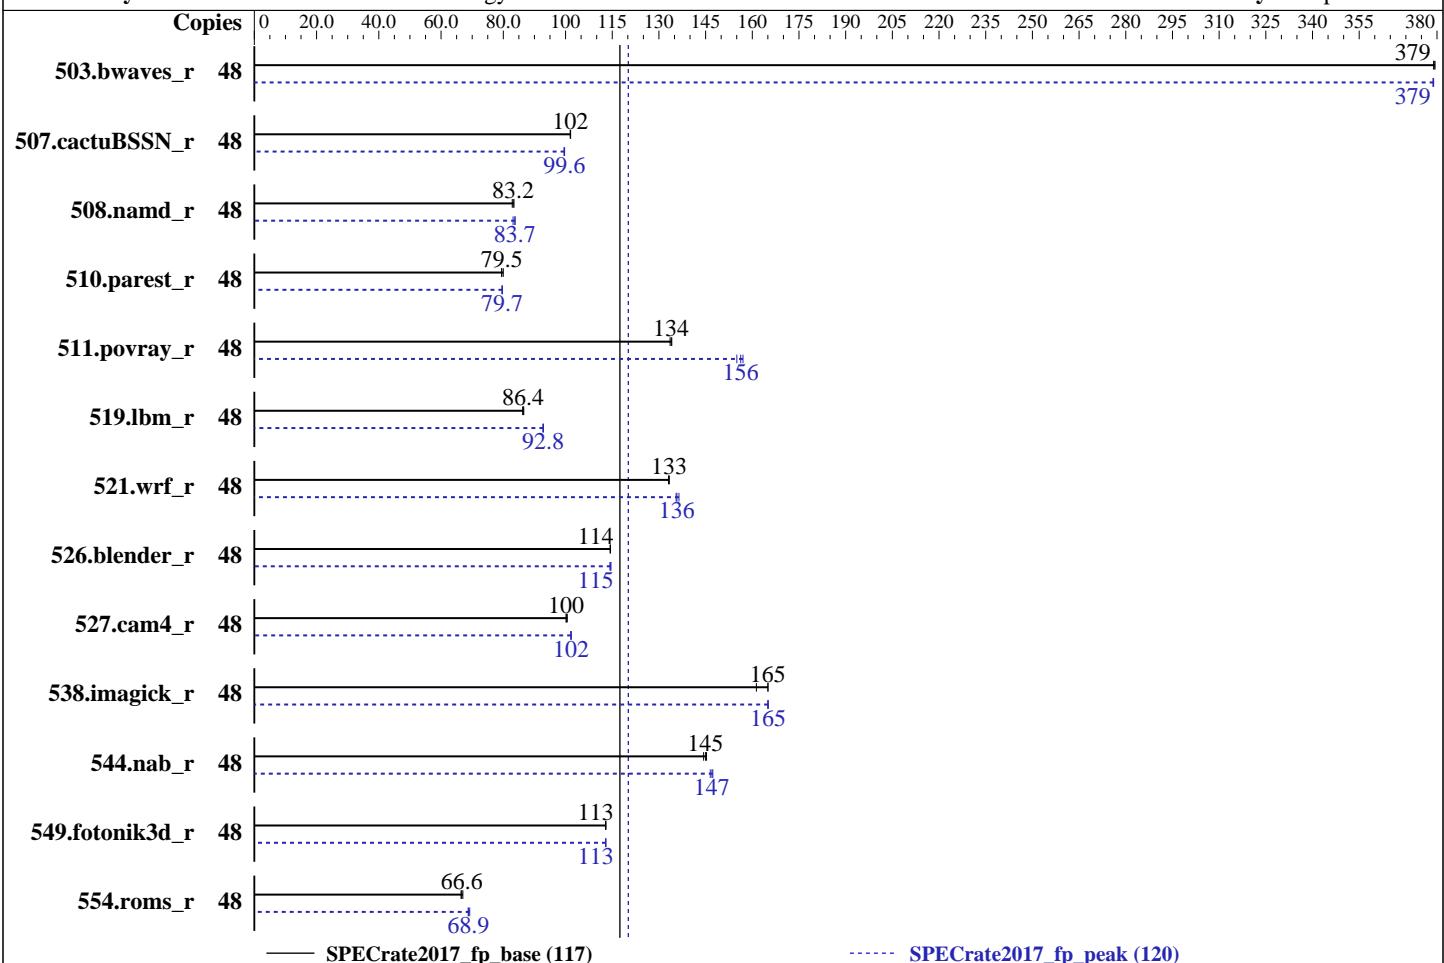

— SPECrate2017\_fp\_base (117)

----- SPECrate2017\_fp\_peak (120)

### Hardware

CPU Name: Intel Xeon Silver 4116  
Max MHz.: 3000  
Nominal: 2100  
Enabled: 24 cores, 2 chips, 2 threads/core  
Orderable: 1,2 chips  
Cache L1: 32 KB I + 32 KB D on chip per core  
L2: 1 MB I+D on chip per core  
L3: 16.5 MB I+D on chip per chip  
Other: None  
Memory: 384 GB (24 x 16 GB 2Rx8 PC4-2666V-R, running at 2400)  
Storage: 1 x 800 GB SAS SSD  
Other: None

### OS:

SUSE Linux Enterprise Server 12 SP2 (x86\_64)  
Kernel 4.4.21-69-default

### Compiler:

C/C++: Version 18.0.0.128 of Intel C/C++  
Compiler for Linux;  
Fortran: Version 18.0.0.128 of Intel Fortran  
Compiler for Linux

### Parallel:

No  
Firmware: Lenovo BIOS Version IVE111C 1.00 released Jul-2017

### File System:

btrfs

### System State:

Run level 3 (multi-user)

### Base Pointers:

64-bit

### Peak Pointers:

64-bit

### Other:

None

### Software

SUSE Linux Enterprise Server 12 SP2 (x86\_64)  
Kernel 4.4.21-69-default

C/C++: Version 18.0.0.128 of Intel C/C++  
Compiler for Linux;  
Fortran: Version 18.0.0.128 of Intel Fortran  
Compiler for Linux



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR650  
(2.10 GHz, Intel Xeon Silver 4116)

**SPECrate2017\_fp\_base = 117**

**SPECrate2017\_fp\_peak = 120**

CPU2017 License: 9017

Test Date: Dec-2017

Test Sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Sep-2017

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	48	1270	379	1269	379	<b>1270</b>	<b>379</b>	48	1270	379	<b>1271</b>	<b>379</b>	1271	379
507.cactuBSSN_r	48	599	102	<b>598</b>	<b>102</b>	598	102	48	<b>610</b>	<b>99.6</b>	610	99.7	611	99.5
508.namd_r	48	550	82.9	547	83.4	<b>548</b>	<b>83.2</b>	48	548	83.1	<b>545</b>	<b>83.7</b>	544	83.8
510.parest_r	48	1570	80.0	<b>1579</b>	<b>79.5</b>	1581	79.4	48	1575	79.7	1578	79.5	<b>1576</b>	<b>79.7</b>
511.povray_r	48	839	134	836	134	<b>837</b>	<b>134</b>	48	714	157	723	155	<b>717</b>	<b>156</b>
519.lbm_r	48	<b>586</b>	<b>86.4</b>	584	86.6	587	86.2	48	<b>545</b>	<b>92.8</b>	545	92.9	545	92.8
521.wrf_r	48	807	133	808	133	<b>807</b>	<b>133</b>	48	788	136	<b>792</b>	<b>136</b>	793	136
526.blender_r	48	<b>639</b>	<b>114</b>	639	114	640	114	48	638	115	<b>638</b>	<b>115</b>	640	114
527.cam4_r	48	<b>837</b>	<b>100</b>	838	100	835	101	48	825	102	<b>825</b>	<b>102</b>	825	102
538.imagick_r	48	740	161	723	165	<b>723</b>	<b>165</b>	48	723	165	724	165	<b>723</b>	<b>165</b>
544.nab_r	48	560	144	<b>557</b>	<b>145</b>	556	145	48	551	146	548	147	<b>549</b>	<b>147</b>
549.fotonik3d_r	48	<b>1657</b>	<b>113</b>	1656	113	1657	113	48	1656	113	<b>1657</b>	<b>113</b>	1658	113
554.roms_r	48	<b>1145</b>	<b>66.6</b>	1138	67.0	1148	66.4	48	1102	69.2	1110	68.7	<b>1108</b>	<b>68.9</b>

**SPECrate2017\_fp\_base = 117**

**SPECrate2017\_fp\_peak = 120**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:

LD\_LIBRARY\_PATH = "/home/cpu2017.1.0.2.ic18.0/lib/ia32:/home/cpu2017.1.0.2.ic18.0/lib/intel64"

LD\_LIBRARY\_PATH = "\$LD\_LIBRARY\_PATH:/home/cpu2017.1.0.2.ic18.0/je5.0.1-32:/home/cpu2017.1.0.2.ic18.0/je5.0.1-64"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM

memory using Redhat Enterprise Linux 7.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop\_caches

runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR650  
(2.10 GHz, Intel Xeon Silver 4116)

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

SPECrate2017\_fp\_base = 117

SPECrate2017\_fp\_peak = 120

Test Date: Dec-2017

Hardware Availability: Aug-2017

Software Availability: Sep-2017

## Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance

SNC set to Enable

Hardware Prefetcher set to Disable

MONITORMWAIT set to Enable

Execute Disable Bit set to Disable

Trusted Execution Technology set to Enable

Stale AtoS set to Enable

LLC Deadline Alloc set to Disable

Sysinfo program /home/cpu2017.1.0.2.ic18.0/bin/sysinfo

Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f

running on Cyborg-SPECcpu2006-SUSE12SP2 Mon Dec 18 17:57:38 2017

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Silver 4116 CPU @ 2.10GHz
  2 "physical id"s (chips)
  48 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 12
  siblings : 24
  physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13
  physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13
```

From lscpu:

```
Architecture:           x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:             Little Endian
CPU(s):                48
On-line CPU(s) list:   0-47
Thread(s) per core:    2
Core(s) per socket:    12
Socket(s):              2
NUMA node(s):           4
Vendor ID:              GenuineIntel
CPU family:             6
Model:                 85
Model name:             Intel(R) Xeon(R) Silver 4116 CPU @ 2.10GHz
Stepping:               4
CPU MHz:                2095.096
BogoMIPS:               4190.19
Virtualization:         VT-x
L1d cache:              32K
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR650  
(2.10 GHz, Intel Xeon Silver 4116)

**SPECrate2017\_fp\_base = 117**

**SPECrate2017\_fp\_peak = 120**

CPU2017 License: 9017

Test Date: Dec-2017

Test Sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Sep-2017

## Platform Notes (Continued)

```
L1i cache: 32K
L2 cache: 1024K
L3 cache: 16896K
NUMA node0 CPU(s): 0-2,6-8,24-26,30-32
NUMA node1 CPU(s): 3-5,9-11,27-29,33-35
NUMA node2 CPU(s): 12-14,18-20,36-38,42-44
NUMA node3 CPU(s): 15-17,21-23,39-41,45-47
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrandlahf_lm abm 3dnowprefetch ida arat epb pln pts dtherm intel_pt
tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2
erms invpcid rtm cqm mpx avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd
avx512bw avx512vl xsaveopt xgetbv1 cqm_llc cqm_occup_llc
```

```
/proc/cpuinfo cache data
cache size : 16896 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 4 nodes (0-3)
node 0 cpus: 0 1 2 6 7 8 24 25 26 30 31 32
node 0 size: 96357 MB
node 0 free: 95736 MB
node 1 cpus: 3 4 5 9 10 11 27 28 29 33 34 35
node 1 size: 96753 MB
node 1 free: 96206 MB
node 2 cpus: 12 13 14 18 19 20 36 37 38 42 43 44
node 2 size: 96753 MB
node 2 free: 96200 MB
node 3 cpus: 15 16 17 21 22 23 39 40 41 45 46 47
node 3 size: 96750 MB
node 3 free: 96153 MB
node distances:
node 0 1 2 3
 0: 10 11 21 21
 1: 11 10 21 21
 2: 21 21 10 11
 3: 21 21 11 10
```

```
From /proc/meminfo
MemTotal: 395893404 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR650  
(2.10 GHz, Intel Xeon Silver 4116)

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

SPECrate2017\_fp\_base = 117

SPECrate2017\_fp\_peak = 120

Test Date: Dec-2017

Hardware Availability: Aug-2017

Software Availability: Sep-2017

## Platform Notes (Continued)

```
From /etc/*release* /etc/*version*
SuSE-release:
    SUSE Linux Enterprise Server 12 (x86_64)
    VERSION = 12
    PATCHLEVEL = 2
    # This file is deprecated and will be removed in a future service pack or release.
    # Please check /etc/os-release for details about this release.
os-release:
    NAME="SLES"
    VERSION="12-SP2"
    VERSION_ID="12.2"
    PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
    ID="sles"
    ANSI_COLOR="0;32"
    CPE_NAME="cpe:/o:suse:sles:12:sp2"

uname -a:
Linux Cyborg-SPECcpu2006-SUSE12SP2 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC
2016 (9464f67) x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Dec 18 04:55

SPEC is set to: /home/cpu2017.1.0.2.ic18.0
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdb2        btrfs 744G  174G  570G  24% /home

Additional information from dmidecode follows. WARNING: Use caution when you interpret
this section. The 'dmidecode' program reads system data which is "intended to allow
hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
BIOS Lenovo -[IVE111C-1.00]- 07/17/2017
Memory:
24x Samsung M393A2K43BB1-CTD 16 GB 2 rank 2666, configured at 2400

(End of data from sysinfo program)
```

## Compiler Version Notes

```
=====
CC 519.lbm_r(base) 538.imagick_r(base, peak) 544.nab_r(base)
-----
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
=====
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR650  
(2.10 GHz, Intel Xeon Silver 4116)

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

SPECrate2017\_fp\_base = 117

SPECrate2017\_fp\_peak = 120

Test Date: Dec-2017

Hardware Availability: Aug-2017

Software Availability: Sep-2017

## Compiler Version Notes (Continued)

CC 519.lbm\_r(peak) 544.nab\_r(peak)

=====

```
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
```

=====

=====

```
CXXC 508.namd_r(base) 510.parest_r(base)
```

=====

```
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
```

=====

=====

```
CXXC 508.namd_r(peak) 510.parest_r(peak)
```

=====

```
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
```

=====

=====

```
CC 511.povray_r(base) 526.blender_r(base)
```

=====

```
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
```

```
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
```

=====

=====

```
CC 511.povray_r(peak) 526.blender_r(peak)
```

=====

```
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
```

```
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
```

=====

=====

```
FC 507.cactubSSN_r(base)
```

=====

```
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
```

```
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
```

```
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR650  
(2.10 GHz, Intel Xeon Silver 4116)

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

SPECrate2017\_fp\_base = 117

SPECrate2017\_fp\_peak = 120

Test Date: Dec-2017

Hardware Availability: Aug-2017

Software Availability: Sep-2017

## Compiler Version Notes (Continued)

=====

FC 507.cactubSSN\_r(peak)

icpc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

ifort (IFORT) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

FC 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak) 554.roms\_r(base)

ifort (IFORT) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

FC 554.roms\_r(peak)

ifort (IFORT) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

CC 521.wrf\_r(base) 527.cam4\_r(base)

ifort (IFORT) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

CC 521.wrf\_r(peak) 527.cam4\_r(peak)

ifort (IFORT) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR650  
(2.10 GHz, Intel Xeon Silver 4116)

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

SPECrate2017\_fp\_base = 117

SPECrate2017\_fp\_peak = 120

Test Date: Dec-2017

Hardware Availability: Aug-2017

Software Availability: Sep-2017

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using both C and C++:

icpcicc

Benchmarks using Fortran, C, and C++:

icpciccifort

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64  
507.cactusBSSN\_r: -DSPEC\_LP64  
508.namd\_r: -DSPEC\_LP64  
510.parest\_r: -DSPEC\_LP64  
511.povray\_r: -DSPEC\_LP64  
519.lbm\_r: -DSPEC\_LP64  
521.wrf\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
526.blender\_r: -DSPEC\_LP64 -DSPEC\_LINUX -funsigned-char  
527.cam4\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG  
538.imagick\_r: -DSPEC\_LP64  
544.nab\_r: -DSPEC\_LP64  
549.fotonik3d\_r: -DSPEC\_LP64  
554.roms\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR650  
(2.10 GHz, Intel Xeon Silver 4116)

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

SPECrate2017\_fp\_base = 117

SPECrate2017\_fp\_peak = 120

Test Date: Dec-2017

Hardware Availability: Aug-2017

Software Availability: Sep-2017

## Base Optimization Flags (Continued)

C++ benchmarks (continued):

-qopt-mem-layout-trans=3

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

Benchmarks using both C and C++:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3

Benchmarks using Fortran, C, and C++:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

## Base Other Flags

C benchmarks:

-m64 -std=c11

C++ benchmarks:

-m64

Fortran benchmarks:

-m64

Benchmarks using both Fortran and C:

-m64 -std=c11

Benchmarks using both C and C++:

-m64 -std=c11

Benchmarks using Fortran, C, and C++:

-m64 -std=c11



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR650  
(2.10 GHz, Intel Xeon Silver 4116)

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

SPECrate2017\_fp\_base = 117

SPECrate2017\_fp\_peak = 120

Test Date: Dec-2017

Hardware Availability: Aug-2017

Software Availability: Sep-2017

## Peak Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using both C and C++:

icpcicc

Benchmarks using Fortran, C, and C++:

icpciccifort

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
519.lbm_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3
```

```
538.imagick_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3
```

544.nab\_r: Same as 519.lbm\_r

C++ benchmarks:

```
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3
```

Fortran benchmarks:

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR650  
(2.10 GHz, Intel Xeon Silver 4116)

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

SPECrate2017\_fp\_base = 117

SPECrate2017\_fp\_peak = 120

Test Date: Dec-2017

Hardware Availability: Aug-2017

Software Availability: Sep-2017

## Peak Optimization Flags (Continued)

503.bwaves\_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3  
-nostandard-realloc-lhs -align array32byte

549.fotonik3d\_r: Same as 503.bwaves\_r

554.roms\_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs  
-align array32byte

Benchmarks using both Fortran and C:

-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

Benchmarks using both C and C++:

-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3

Benchmarks using Fortran, C, and C++:

-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

## Peak Other Flags

C benchmarks:

-m64 -std=c11

C++ benchmarks:

-m64

Fortran benchmarks:

-m64

Benchmarks using both Fortran and C:

-m64 -std=c11

Benchmarks using both C and C++:

-m64 -std=c11

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR650  
(2.10 GHz, Intel Xeon Silver 4116)

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

SPECrate2017\_fp\_base = 117

SPECrate2017\_fp\_peak = 120

Test Date: Dec-2017

Hardware Availability: Aug-2017

Software Availability: Sep-2017

## Peak Other Flags (Continued)

Benchmarks using Fortran, C, and C++:

-m64 -std=c11

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECCpu2017-Flags-V1.2-SKL-A.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECCpu2017-Flags-V1.2-SKL-A.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.2 on 2017-12-18 04:57:37-0500.

Report generated on 2018-10-31 17:08:00 by CPU2017 PDF formatter v6067.

Originally published on 2018-01-10.