



SPEC® CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_int_base = 253

PowerEdge R7425 (AMD EPYC 7501, 2.00 GHz)

SPECrate2017_int_peak = 278

CPU2017 License: 55


Test Date: Mar-2018

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2018

Tested by: Dell Inc.

Software Availability: Sep-2017

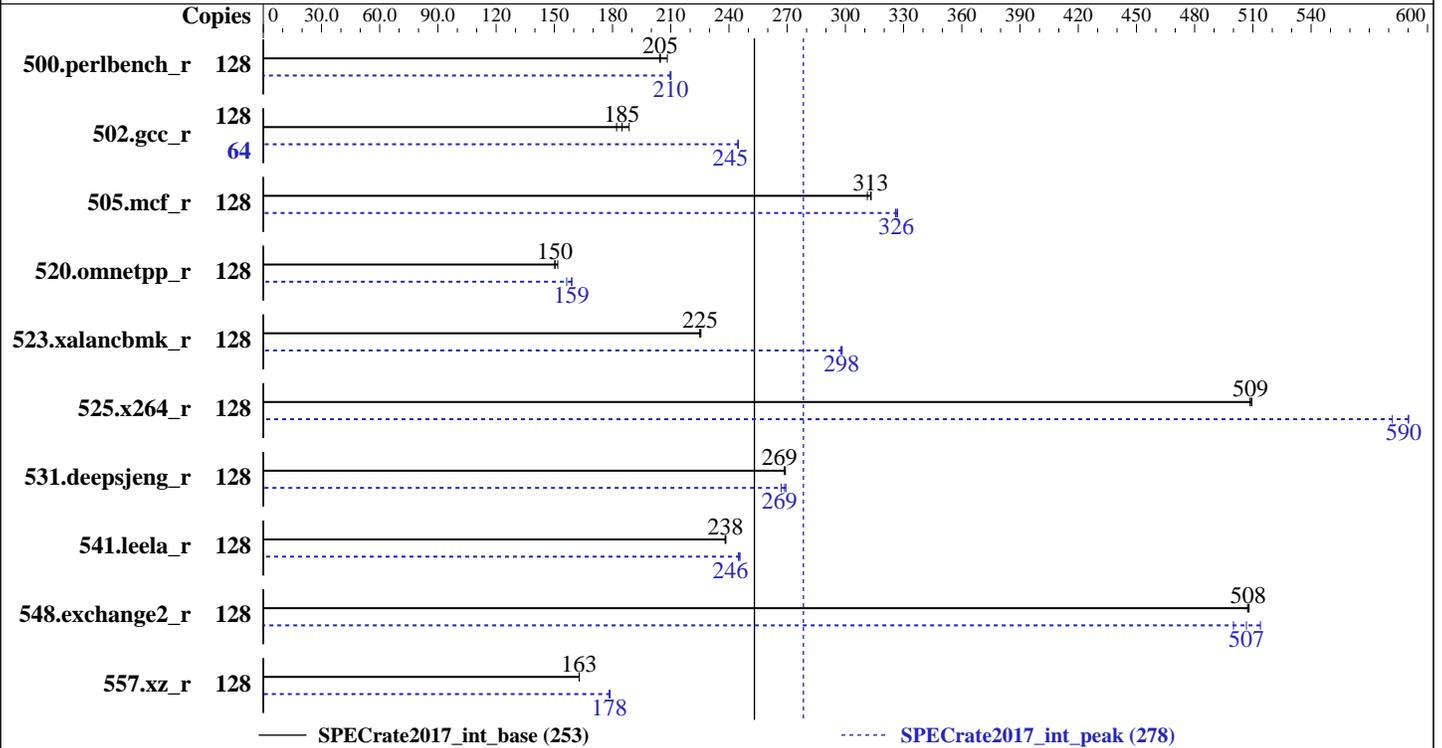

Hardware

CPU Name: AMD EPYC 7501
 Max MHz.: 3000
 Nominal: 2000
 Enabled: 64 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 64 KB I + 32 KB D on chip per core
 L2: 512 KB I+D on chip per core
 L3: 64 MB I+D on chip per chip, 8 MB shared / 4 cores
 Other: None
 Memory: 1 TB (16 x 64 GB 4DRx4 PC4-2666V-L, running at 2666)
 Storage: 1 x 960 GB SATA SSD
 Other: None

Software

OS: SUSE Linux Enterprise Server 12 SP3 (x86_64) kernel 4.4.114-94.11-default
 Compiler: C/C++: Version 1.0.0 of AOCC
 Fortran: Version 4.8.2 of GCC
 Parallel: No
 Firmware: Version 1.0.9 released Jan-2018
 File System: xfs
 System State: Run Level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: jemalloc memory allocator library, version 4.5.0



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_int_base = 253

PowerEdge R7425 (AMD EPYC 7501, 2.00 GHz)

SPECrate2017_int_peak = 278

CPU2017 License: 55

Test Date: Mar-2018

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2018

Tested by: Dell Inc.

Software Availability: Sep-2017

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	128	979	208	996	205	997	204	128	971	210	972	210	970	210
502.gcc_r	128	961	189	995	182	980	185	64	371	244	370	245	370	245
505.mcf_r	128	660	313	661	313	664	311	128	633	327	635	326	634	326
520.omnetpp_r	128	1117	150	1106	152	1118	150	128	1056	159	1057	159	1074	156
523.xalancbmk_r	128	601	225	600	225	599	226	128	453	298	454	298	454	298
525.x264_r	128	441	509	440	509	441	509	128	380	590	380	590	385	582
531.deepsjeng_r	128	545	269	546	269	546	269	128	546	269	550	267	545	269
541.leela_r	128	890	238	891	238	889	238	128	863	246	866	245	863	246
548.exchange2_r	128	661	508	661	507	660	508	128	653	514	671	500	662	507
557.xz_r	128	849	163	849	163	849	163	128	773	179	775	178	775	178

SPECrate2017_int_base = 253

SPECrate2017_int_peak = 278

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>

Set dirty_ratio=8 to limit dirty cache to 8% of memory
Set swappiness=1 to swap only if necessary
Set zone_reclaim_mode=1 to free local node memory and avoid remote memory
sync then drop_caches=3 to reset caches before invoking runcpu

dirty_ratio, swappiness, zone_reclaim_mode and drop_caches were
all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages were enabled for this run (OS default)

Huge pages were not configured for this run.



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_int_base = 253

PowerEdge R7425 (AMD EPYC 7501, 2.00 GHz)

SPECrate2017_int_peak = 278

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2018

Hardware Availability: Feb-2018

Software Availability: Sep-2017

General Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH = "/home/cpu2017-1.0.2/amd1704-rate-libs-revC/64:/home/cpu2017-1.0.2/amd1704-rate-libs-revC/32:"
MALLOCONF = "lg_chunk:26"
```

The AMD64 AOCC Compiler Suite is available at

<http://developer.amd.com/amd-aocc/>

The AOCC Gold Linker plugin was installed and used for the link stage.

The AOCC Fortran Plugin version 1.0 was used to leverage AOCC optimizers with gfortran.

Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using RHEL 7.4

jemalloc, a general purpose malloc implementation, was obtained at

<https://github.com/jemalloc/jemalloc/releases/download/4.5.0/jemalloc-4.5.0.tar.bz2>

jemalloc was built with GCC v4.8.5 in RHEL v7.2 under default conditions.

jemalloc uses environment variable MALLOCONF with values narenas and lg_chunk:

narenas: sets the maximum number of arenas to use for automatic multiplexing of threads and arenas.

lg_chunk: set the virtual memory chunk size (log base 2). For example,

lg_chunk:21 sets the default chunk size to $2^{21} = 2\text{MiB}$.

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

sysinfo program /home/cpu2017-1.0.2/bin/sysinfo

Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f

running on linux-o8ns Wed Mar 7 11:57:49 2018

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : AMD EPYC 7501 32-Core Processor

2 "physical id"s (chips)

128 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 32

siblings : 64

physical 0: cores 0 1 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_int_base = 253

PowerEdge R7425 (AMD EPYC 7501, 2.00 GHz)

SPECrate2017_int_peak = 278

CPU2017 License: 55

Test Date: Mar-2018

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2018

Tested by: Dell Inc.

Software Availability: Sep-2017

Platform Notes (Continued)

29 30 31
physical 1: cores 0 1 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28
29 30 31

From lscpu:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:             Little Endian
CPU(s):                 128
On-line CPU(s) list:   0-127
Thread(s) per core:    2
Core(s) per socket:    32
Socket(s):              2
NUMA node(s):          8
Vendor ID:              AuthenticAMD
CPU family:             23
Model:                  1
Model name:             AMD EPYC 7501 32-Core Processor
Stepping:               2
CPU MHz:                1996.175
BogoMIPS:               3992.35
Virtualization:        AMD-V
L1d cache:              32K
L1i cache:              64K
L2 cache:               512K
L3 cache:               8192K
NUMA node0 CPU(s):     0,8,16,24,32,40,48,56,64,72,80,88,96,104,112,120
NUMA node1 CPU(s):     2,10,18,26,34,42,50,58,66,74,82,90,98,106,114,122
NUMA node2 CPU(s):     4,12,20,28,36,44,52,60,68,76,84,92,100,108,116,124
NUMA node3 CPU(s):     6,14,22,30,38,46,54,62,70,78,86,94,102,110,118,126
NUMA node4 CPU(s):     1,9,17,25,33,41,49,57,65,73,81,89,97,105,113,121
NUMA node5 CPU(s):     3,11,19,27,35,43,51,59,67,75,83,91,99,107,115,123
NUMA node6 CPU(s):     5,13,21,29,37,45,53,61,69,77,85,93,101,109,117,125
NUMA node7 CPU(s):     7,15,23,31,39,47,55,63,71,79,87,95,103,111,119,127
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
constant_tsc rep_good nopl nonstop_tsc extd_apicid amd_dcm aperfmperf eagerfpu pni
pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx f16c
rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_l2 mwaitx arat cpb
hw_pstate retpoline retpoline_amd npt lbrv svm_lock nrip_save tsc_scale vmcb_clean
flushbyasid decodeassists pausefilter pfthreshold vmmcall avic fsgsbase bmi1 avx2
smep bmi2 rdseed adx smap clflushopt sha_ni xsaveopt xsavec xgetbv1 clzero irperf
ibpb overflow_recov succor smca

```

/proc/cpuinfo cache data
cache size : 512 KB

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_int_base = 253

PowerEdge R7425 (AMD EPYC 7501, 2.00 GHz)

SPECrate2017_int_peak = 278

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2018

Hardware Availability: Feb-2018

Software Availability: Sep-2017

Platform Notes (Continued)

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 8 nodes (0-7)
node 0 cpus: 0 8 16 24 32 40 48 56 64 72 80 88 96 104 112 120
node 0 size: 128623 MB
node 0 free: 128465 MB
node 1 cpus: 2 10 18 26 34 42 50 58 66 74 82 90 98 106 114 122
node 1 size: 129021 MB
node 1 free: 128883 MB
node 2 cpus: 4 12 20 28 36 44 52 60 68 76 84 92 100 108 116 124
node 2 size: 129021 MB
node 2 free: 128880 MB
node 3 cpus: 6 14 22 30 38 46 54 62 70 78 86 94 102 110 118 126
node 3 size: 129021 MB
node 3 free: 128891 MB
node 4 cpus: 1 9 17 25 33 41 49 57 65 73 81 89 97 105 113 121
node 4 size: 129021 MB
node 4 free: 128892 MB
node 5 cpus: 3 11 19 27 35 43 51 59 67 75 83 91 99 107 115 123
node 5 size: 129021 MB
node 5 free: 128875 MB
node 6 cpus: 5 13 21 29 37 45 53 61 69 77 85 93 101 109 117 125
node 6 size: 129021 MB
node 6 free: 128886 MB
node 7 cpus: 7 15 23 31 39 47 55 63 71 79 87 95 103 111 119 127
node 7 size: 129019 MB
node 7 free: 128883 MB

```

```

node distances:
node  0  1  2  3  4  5  6  7
  0:  10 16 16 16 28 28 22 28
  1:  16 10 16 16 28 28 28 22
  2:  16 16 10 16 22 28 28 28
  3:  16 16 16 10 28 22 28 28
  4:  28 28 22 28 10 16 16 16
  5:  28 28 28 22 16 10 16 16
  6:  22 28 28 28 16 16 10 16
  7:  28 22 28 28 16 16 16 10

```

From /proc/meminfo

MemTotal: 1056533368 kB

HugePages_Total: 0

Hugepagesize: 2048 kB

/usr/bin/lsb_release -d

SUSE Linux Enterprise Server 12 SP3

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_int_base = 253

PowerEdge R7425 (AMD EPYC 7501, 2.00 GHz)

SPECrate2017_int_peak = 278

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Mar-2018
Hardware Availability: Feb-2018
Software Availability: Sep-2017

Platform Notes (Continued)

```

From /etc/*release* /etc/*version*
SuSE-release:
    SUSE Linux Enterprise Server 12 (x86_64)
    VERSION = 12
    PATCHLEVEL = 3
    # This file is deprecated and will be removed in a future service pack or release.
    # Please check /etc/os-release for details about this release.
os-release:
    NAME="SLES"
    VERSION="12-SP3"
    VERSION_ID="12.3"
    PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"
    ID="sles"
    ANSI_COLOR="0;32"
    CPE_NAME="cpe:/o:suse:sles:12:sp3"

uname -a:
    Linux linux-o8ns 4.4.114-94.11-default #1 SMP Thu Feb 1 19:28:26 UTC 2018 (4309ff9)
    x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Mar 7 11:54

SPEC is set to: /home/cpu2017-1.0.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4        xfs   844G  11G  834G   2% /home

Additional information from dmidecode follows.  WARNING: Use caution when you interpret
this section. The 'dmidecode' program reads system data which is "intended to allow
hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
BIOS Dell Inc. 1.0.9 01/05/2018
Memory:
    16x 802C8632802C 72ASS8G72LZ-2G6B2 64 GB 4 rank 2666
    16x Not Specified Not Specified

(End of data from sysinfo program)

```

Compiler Version Notes

```

=====
CC 502.gcc_r(peak)
-----
AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: i386-unknown-linux-gnu
Thread model: posix

```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_int_base = 253

PowerEdge R7425 (AMD EPYC 7501, 2.00 GHz)

SPECrate2017_int_peak = 278

CPU2017 License: 55

Test Date: Mar-2018

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2018

Tested by: Dell Inc.

Software Availability: Sep-2017

Compiler Version Notes (Continued)

InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

=====
CXXC 523.xalancbmk_r(peak)

AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
AOCC.LLVM.4.0.0.B35.2017_04_26)

Target: i386-unknown-linux-gnu

Thread model: posix

InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

CC 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
525.x264_r(base) 557.xz_r(base, peak)

AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
AOCC.LLVM.4.0.0.B35.2017_04_26)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

CXXC 520.omnetpp_r(base, peak) 523.xalancbmk_r(base) 531.deepsjeng_r(base,
peak) 541.leela_r(base)

AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
AOCC.LLVM.4.0.0.B35.2017_04_26)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

CC 500.perlbench_r(peak) 525.x264_r(peak)

AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
AOCC.LLVM.4.0.0.B35.2017_04_26)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

CXXC 541.leela_r(peak)

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_int_base = 253

PowerEdge R7425 (AMD EPYC 7501, 2.00 GHz)

SPECrate2017_int_peak = 278

CPU2017 License: 55

Test Date: Mar-2018

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2018

Tested by: Dell Inc.

Software Availability: Sep-2017

Compiler Version Notes (Continued)

```
-----
AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
  AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin
-----
```

```
=====
FC 548.exchange2_r(base, peak)
-----
```

```
GNU Fortran (GCC) 4.8.2
Copyright (C) 2013 Free Software Foundation, Inc.
GNU Fortran comes with NO WARRANTY, to the extent permitted by law.
You may redistribute copies of GNU Fortran
under the terms of the GNU General Public License.
For more information about these matters, see the file named COPYING
-----
```

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

clang gfortran

Base Portability Flags

```
500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_int_base = 253

PowerEdge R7425 (AMD EPYC 7501, 2.00 GHz)

SPECrate2017_int_peak = 278

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2018

Hardware Availability: Feb-2018

Software Availability: Sep-2017

Base Optimization Flags

C benchmarks:

```
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop  
-disable-vect-cmp -O3 -ffast-math -march=znver1 -fstruct-layout=2  
-mllvm -unroll-threshold=100 -fremap-arrays -mno-avx2  
-inline-threshold=1000 -z muldefs -ljemalloc
```

C++ benchmarks:

```
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop  
-disable-vect-cmp -O3 -march=znver1 -mllvm -unroll-threshold=100  
-finline-aggressive -fremap-arrays -inline-threshold=1000 -z muldefs  
-ljemalloc
```

Fortran benchmarks:

```
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop  
-disable-vect-cmp -O3(gfortran) -O3(clang) -mavx -madox  
-funroll-loops -ffast-math -z muldefs -Ofast -fdefault-integer-8  
-fplugin=dragonegg.so -fplugin-arg-dragonegg-llvm-option="  
-enable-iv-split -inline-threshold:1000 -disable-vect-cmp" -ljemalloc  
-lgfortran -lamdlibm
```

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

clang gfortran

Peak Portability Flags

```
500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64  
502.gc_r: -D_FILE_OFFSET_BITS=64  
505.mcf_r: -DSPEC_LP64  
520.omnetpp_r: -DSPEC_LP64  
523.xalancbmk_r: -DSPEC_LINUX -D_FILE_OFFSET_BITS=64  
525.x264_r: -DSPEC_LP64  
531.deepsjeng_r: -DSPEC_LP64  
541.leela_r: -DSPEC_LP64
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_int_base = 253

PowerEdge R7425 (AMD EPYC 7501, 2.00 GHz)

SPECrate2017_int_peak = 278

CPU2017 License: 55

Test Date: Mar-2018

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2018

Tested by: Dell Inc.

Software Availability: Sep-2017

Peak Portability Flags (Continued)

548.exchange2_r: -DSPEC_LP64

557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -flto -Wl, -plugin-opt= -merge-constant
-lsr-in-nested-loop -fprofile-instr-generate(pass 1)
-fprofile-instr-use(pass 2) -Ofast -march=znver1
-fstruct-layout=3 -mllvm -vectorize-memory-aggressively
-mno-avx2 -unroll-threshold=100 -fremap-arrays
-inline-threshold=1000 -ljemalloc
```

```
502.gcc_r: -m32 -flto -Wl, -plugin-opt= -merge-constant
-lsr-in-nested-loop -Ofast -march=znver1
-fstruct-layout=3 -mllvm -vectorize-memory-aggressively
-mno-avx2 -unroll-threshold=100 -fremap-arrays
-inline-threshold=1000 -fgnu89-inline
-L/root/work/lib/jemalloc/lib32 -ljemalloc
```

```
505.mcf_r: -flto -Wl, -plugin-opt= -merge-constant
-lsr-in-nested-loop -Ofast -march=znver1
-fstruct-layout=3 -mllvm -vectorize-memory-aggressively
-mno-avx2 -unroll-threshold=100 -fremap-arrays
-inline-threshold=1000 -ljemalloc
```

525.x264_r: Same as 500.perlbench_r

557.xz_r: Same as 505.mcf_r

C++ benchmarks:

```
520.omnetpp_r: -flto -Wl, -plugin-opt= -merge-constant
-lsr-in-nested-loop -Ofast -march=znver1
-finline-aggressive -mllvm -unroll-threshold=100
-fremap-arrays -inline-threshold=1000 -ljemalloc
```

```
523.xalancbmk_r: -m32 -flto -Wl, -plugin-opt= -merge-constant
-lsr-in-nested-loop -Ofast -march=znver1
-finline-aggressive -mllvm -unroll-threshold=100
-fremap-arrays -inline-threshold=1000
-L/root/work/lib/jemalloc/lib32 -ljemalloc
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_int_base = 253

PowerEdge R7425 (AMD EPYC 7501, 2.00 GHz)

SPECrate2017_int_peak = 278

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2018

Hardware Availability: Feb-2018

Software Availability: Sep-2017

Peak Optimization Flags (Continued)

531.deepsjeng_r: Same as 520.omnetpp_r

```
541.leela_r: -flto -Wl, -plugin-opt= -merge-constant
-lsr-in-nested-loop -fprofile-instr-generate(pass 1)
-fprofile-instr-use(pass 2) -Ofast -march=znver1 -mllvm
-unroll-count=8 -unroll-threshold=100 -ljemalloc
```

Fortran benchmarks:

```
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop
-O3(gfortran) -O3(clang) -mavx2 -madx -funroll-loops -ffast-math
-Ofast -fdefault-integer-8 -fplugin=dragonegg.so
-fplugin-arg-dragonegg-llvm-option=" -enable-iv-split
-inline-threshold:1000 -disable-vect-cmp" -ljemalloc -lgfortran
-lamdlbm
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/gcc.2018-02-16.html>

<http://www.spec.org/cpu2017/flags/aocc100-flags-revC-I.2018-02-16.html>

<http://www.spec.org/cpu2017/flags/amd1704-Dell-platform-revB-I.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/gcc.2018-02-16.xml>

<http://www.spec.org/cpu2017/flags/aocc100-flags-revC-I.2018-02-16.xml>

<http://www.spec.org/cpu2017/flags/amd1704-Dell-platform-revB-I.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2018-03-07 12:57:48-0500.

Report generated on 2019-02-21 13:55:37 by CPU2017 PDF formatter v6067.

Originally published on 2018-04-03.