



# SPEC® CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

Thinksystem SR950  
(2.70 GHz, Intel Xeon Platinum 8280)

SPECrate2017\_int\_base = 463

SPECrate2017\_int\_peak = Not Run

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Mar-2019

Hardware Availability: Apr-2019

Software Availability: Sep-2018

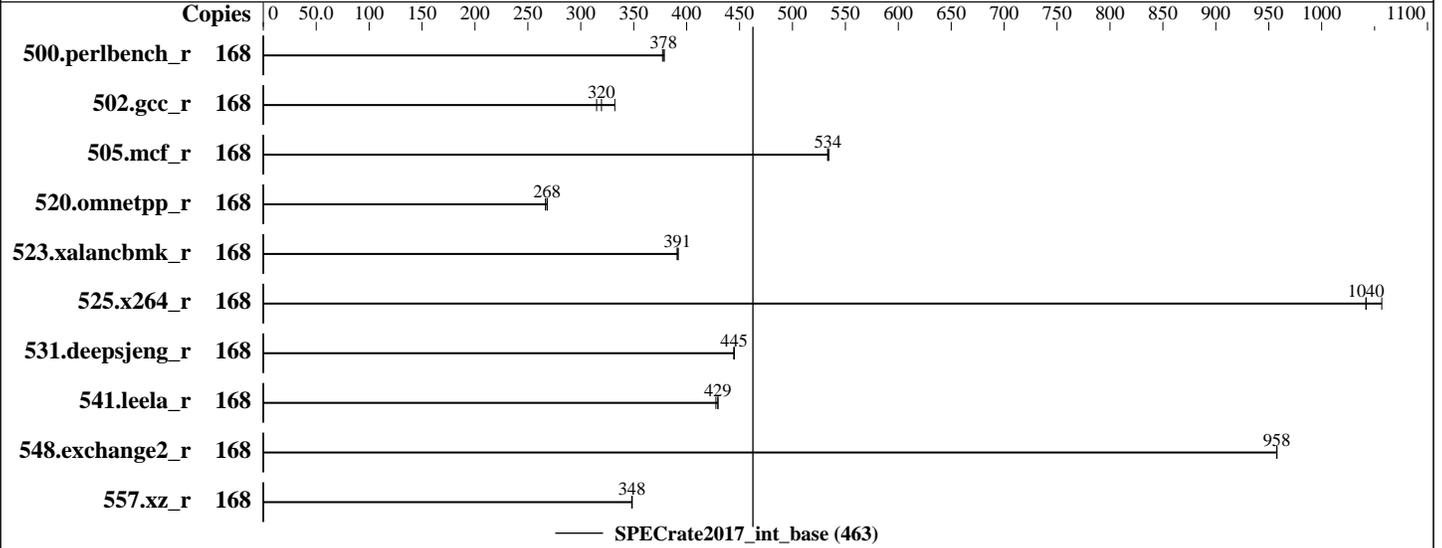

### Hardware

CPU Name: Intel Xeon Platinum 8280  
 Max MHz.: 4000  
 Nominal: 2700  
 Enabled: 84 cores, 3 chips, 2 threads/core  
 Orderable: 2,3,4 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 38.5 MB I+D on chip per chip  
 Other: None  
 Memory: 1152 GB (36 x 32 GB 2Rx4 PC4-2933Y-R)  
 Storage: 1 x 800 GB SATA SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15 (x86\_64)  
 Kernel 4.12.14-25.13-default  
 Compiler: C/C++: Version 19.0.0.117 of Intel  
 C/C++  
 Compiler for Linux;  
 Fortran: Version 19.0.0.117 of  
 Intel Fortran  
 Compiler for Linux  
 Parallel: No  
 Firmware: Lenovo BIOS Version PSE121I 1.50 released Mar-2019  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: jemalloc memory allocator V5.0.1



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate2017\_int\_base = 463

Thinksystem SR950  
(2.70 GHz, Intel Xeon Platinum 8280)

SPECrate2017\_int\_peak = Not Run

CPU2017 License: 9017  
Test Sponsor: Lenovo Global Technology  
Tested by: Lenovo Global Technology

Test Date: Mar-2019  
Hardware Availability: Apr-2019  
Software Availability: Sep-2018

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	168	706	379	<b>707</b>	<b>378</b>	709	377							
502.gcc_r	168	<b>744</b>	<b>320</b>	755	315	716	332							
505.mcf_r	168	509	533	508	534	<b>509</b>	<b>534</b>							
520.omnetpp_r	168	822	268	<b>822</b>	<b>268</b>	827	267							
523.xalancbmk_r	168	452	392	454	391	<b>453</b>	<b>391</b>							
525.x264_r	168	282	1040	278	1060	<b>282</b>	<b>1040</b>							
531.deepsjeng_r	168	<b>433</b>	<b>445</b>	433	445	433	445							
541.leela_r	168	651	428	648	430	<b>648</b>	<b>429</b>							
548.exchange2_r	168	<b>460</b>	<b>958</b>	460	958	460	958							
557.xz_r	168	<b>521</b>	<b>348</b>	520	349	521	348							

SPECrate2017\_int\_base = 463

SPECrate2017\_int\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2017-1.0.5-ic19/lib/ia32:/home/cpu2017-1.0.5-ic19/lib/intel64"  
LD\_LIBRARY\_PATH = "\$LD\_LIBRARY\_PATH:/home/cpu2017-1.0.5-ic19/je5.0.1-32:/home/cpu2017-1.0.5-ic19/je5.0.1-64"  
Binaries compiled on a system with 1x Intel Core i9-799X CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.5  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

SPECrate2017\_int\_base = 463

Thinksystem SR950  
(2.70 GHz, Intel Xeon Platinum 8280)

SPECrate2017\_int\_peak = Not Run

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Mar-2019  
**Hardware Availability:** Apr-2019  
**Software Availability:** Sep-2018

## General Notes (Continued)

is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2018-3640 (Spectre variant 3a) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2018-3639 (Spectre variant 4) is mitigated in the system as tested and documented.  
jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS configuration:  
Choose Operating Mode set to Maximum Performance  
Choose Operating Mode set to Custom Mode  
DCU Streamer Prefetcher set to Disable  
MONITOR/MWAIT set to Enable  
SNC set to Enable  
Sysinfo program /home/cpu2017-1.0.5-ic19/bin/sysinfo  
Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9  
running on linux-zwje Fri Mar 15 15:34:22 2019  
  
SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) Platinum 8280 CPU @ 2.70GHz  
3 "physical id"s (chips)  
168 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
cpu cores : 28  
siblings : 56  
physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27  
28 29 30  
physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27  
28 29 30  
physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27  
28 29 30

From lscpu:  
Architecture: x86\_64  
CPU op-mode(s): 32-bit, 64-bit  
Byte Order: Little Endian  
CPU(s): 168  
On-line CPU(s) list: 0-167

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate2017\_int\_base = 463

Thinksystem SR950  
(2.70 GHz, Intel Xeon Platinum 8280)

SPECrate2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Mar-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2019

Tested by: Lenovo Global Technology

Software Availability: Sep-2018

### Platform Notes (Continued)

```

Thread(s) per core: 2
Core(s) per socket: 28
Socket(s): 3
NUMA node(s): 6
Vendor ID: GenuineIntel
CPU family: 6
Model: 85
Model name: Intel(R) Xeon(R) Platinum 8280 CPU @ 2.70GHz
Stepping: 6
CPU MHz: 2700.000
CPU max MHz: 4000.0000
CPU min MHz: 1000.0000
BogoMIPS: 5400.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 39424K
NUMA node0 CPU(s): 0-3,7-9,14-17,21-23,84-87,91-93,98-101,105-107
NUMA node1 CPU(s): 4-6,10-13,18-20,24-27,88-90,94-97,102-104,108-111
NUMA node2 CPU(s): 28-31,35-37,42-45,49-51,112-115,119-121,126-129,133-135
NUMA node3 CPU(s): 32-34,38-41,46-48,52-55,116-118,122-125,130-132,136-139
NUMA node4 CPU(s): 56-59,63-65,70-73,77-79,140-143,147-149,154-157,161-163
NUMA node5 CPU(s): 60-62,66-69,74-76,80-83,144-146,150-153,158-160,164-167
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
invpcid_single ssbd mba ibrs ibpb stibp tpr_shadow vnmi flexpriority ept vpid
fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f
avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl
xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
dtherm ida arat pln pts pku ospke avx512_vnni flush_lld arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 39424 KB

```

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.
available: 6 nodes (0-5)
node 0 cpus: 0 1 2 3 7 8 9 14 15 16 17 21 22 23 84 85 86 87 91 92 93 98 99 100 101 105
106 107
node 0 size: 192990 MB
node 0 free: 192580 MB
node 1 cpus: 4 5 6 10 11 12 13 18 19 20 24 25 26 27 88 89 90 94 95 96 97 102 103 104

```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate2017\_int\_base = 463

Thinksystem SR950  
(2.70 GHz, Intel Xeon Platinum 8280)

SPECrate2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Mar-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2019

Tested by: Lenovo Global Technology

Software Availability: Sep-2018

### Platform Notes (Continued)

```

108 109 110 111
node 1 size: 193521 MB
node 1 free: 190245 MB
node 2 cpus: 28 29 30 31 35 36 37 42 43 44 45 49 50 51 112 113 114 115 119 120 121 126
127 128 129 133 134 135
node 2 size: 193521 MB
node 2 free: 193301 MB
node 3 cpus: 32 33 34 38 39 40 41 46 47 48 52 53 54 55 116 117 118 122 123 124 125 130
131 132 136 137 138 139
node 3 size: 193493 MB
node 3 free: 193274 MB
node 4 cpus: 56 57 58 59 63 64 65 70 71 72 73 77 78 79 140 141 142 143 147 148 149 154
155 156 157 161 162 163
node 4 size: 193522 MB
node 4 free: 192825 MB
node 5 cpus: 60 61 62 66 67 68 69 74 75 76 80 81 82 83 144 145 146 150 151 152 153 158
159 160 164 165 166 167
node 5 size: 193519 MB
node 5 free: 193245 MB
node distances:
node  0  1  2  3  4  5
0:  10 11 21 21 20 20
1:  11 10 21 21 20 20
2:  21 21 10 11 20 20
3:  21 21 11 10 20 20
4:  20 20 20 20 10 20
5:  20 20 20 20 20 10

```

From /proc/meminfo

```

MemTotal:      1188423104 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

From /etc/\*release\* /etc/\*version\*

```

os-release:
NAME="SLES"
VERSION="15"
VERSION_ID="15"
PRETTY_NAME="SUSE Linux Enterprise Server 15"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15"

```

uname -a:

```

Linux linux-zwje 4.12.14-25.13-default #1 SMP Tue Aug 14 15:07:35 UTC 2018 (947aa51)
x86_64 x86_64 x86_64 GNU/Linux

```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate2017\_int\_base = 463

Thinksystem SR950  
(2.70 GHz, Intel Xeon Platinum 8280)

SPECrate2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Mar-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2019

Tested by: Lenovo Global Technology

Software Availability: Sep-2018

## Platform Notes (Continued)

Kernel self-reported vulnerability status:

CVE-2017-5754 (Meltdown): Not affected  
 CVE-2017-5753 (Spectre variant 1): Mitigation: \_\_user pointer sanitization  
 CVE-2017-5715 (Spectre variant 2): Mitigation: Indirect Branch Restricted Speculation, IBPB, IBRS\_FW

run-level 3 Mar 15 15:33

SPEC is set to: /home/cpu2017-1.0.5-ic19

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda2	xfs	744G	25G	719G	4%	/

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Lenovo -[PSE121I-1.50]- 03/01/2019

Memory:

60x NO DIMM NO DIMM  
36x Samsung M393A4K40CB2-CVF 32 GB 2 rank 2933

(End of data from sysinfo program)

## Compiler Version Notes

```
=====
CC 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base) 525.x264_r(base)
557.xz_r(base)
-----
```

```
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.0.117 Build 20180804
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
-----
```

```
=====
CXXC 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
541.leela_r(base)
-----
```

```
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.0.117 Build 20180804
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
-----
=====
```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

SPECrate2017\_int\_base = 463

Thinksystem SR950  
(2.70 GHz, Intel Xeon Platinum 8280)

SPECrate2017\_int\_peak = Not Run

**CPU2017 License:** 9017

**Test Date:** Mar-2019

**Test Sponsor:** Lenovo Global Technology

**Hardware Availability:** Apr-2019

**Tested by:** Lenovo Global Technology

**Software Availability:** Sep-2018

## Compiler Version Notes (Continued)

FC 548.exchange2\_r(base)

-----  
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.0.117 Build 20180804  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----

## Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
502 gcc\_r: -DSPEC\_LP64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc

C++ benchmarks:

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

Thinksystem SR950  
(2.70 GHz, Intel Xeon Platinum 8280)

SPECrate2017\_int\_base = 463

SPECrate2017\_int\_peak = Not Run

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Mar-2019

**Hardware Availability:** Apr-2019

**Software Availability:** Sep-2018

## Base Optimization Flags (Continued)

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.0-official-linux64.2019-01-15.html>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-CLX-A.2019-04-02.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.0-official-linux64.2019-01-15.xml>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-CLX-A.2019-04-02.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.5 on 2019-03-15 03:34:21-0400.

Report generated on 2019-04-02 17:01:03 by CPU2017 PDF formatter v6067.

Originally published on 2019-04-02.