



# SPEC® CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate2017\_int\_base = 204

ThinkSystem SR530  
(2.10 GHz, Intel Xeon Gold 6230)

SPECrate2017\_int\_peak = Not Run

CPU2017 License: 9017


Test Date: Mar-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2019

Tested by: Lenovo Global Technology

Software Availability: Oct-2018

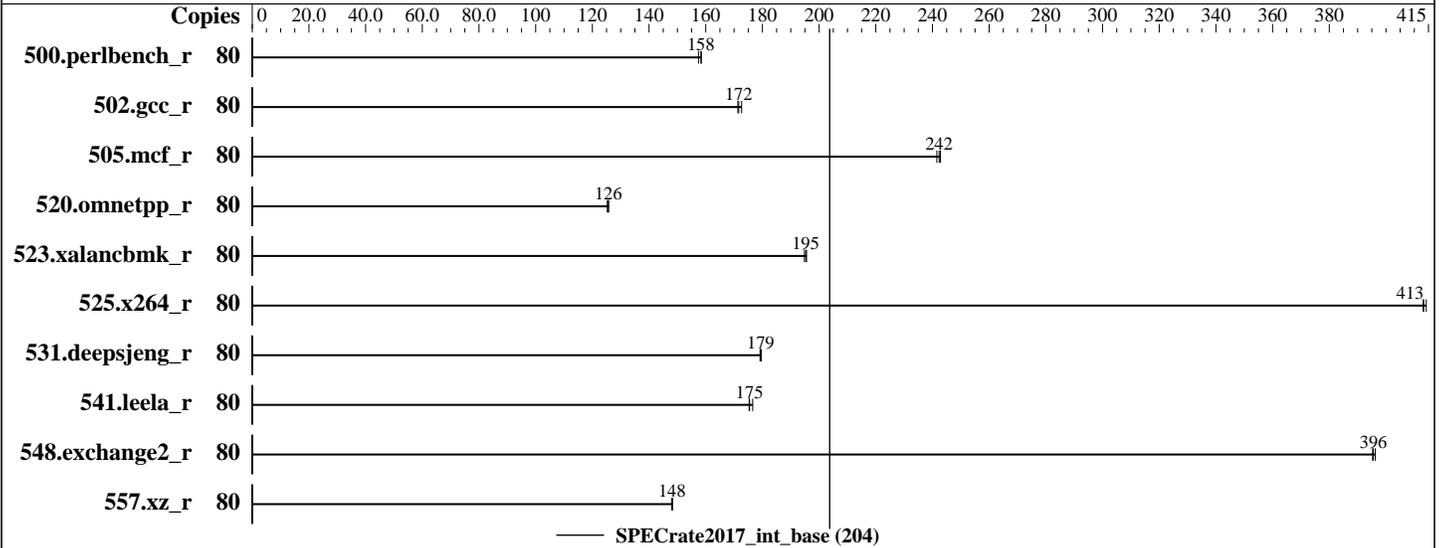

### Hardware

CPU Name: Intel Xeon Gold 6230  
 Max MHz.: 3900  
 Nominal: 2100  
 Enabled: 40 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 27.5 MB I+D on chip per chip  
 Other: None  
 Memory: 384 GB (12 x 32 GB 2Rx4 PC4-2933Y-R)  
 Storage: 1 x 960 GB SATA SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 12 SP4 (x86\_64)  
 Kernel 4.12.14-94.41-default  
 Compiler: C/C++: Version 19.0.0.117 of Intel  
 C/C++  
 Compiler for Linux;  
 Fortran: Version 19.0.0.117 of  
 Intel Fortran  
 Compiler for Linux  
 Parallel: No  
 Firmware: Lenovo BIOS Version TEE135L 2.10 released Jan-2019  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: jemalloc memory allocator V5.0.1



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR530  
(2.10 GHz, Intel Xeon Gold 6230)

SPECrate2017\_int\_base = 204

SPECrate2017\_int\_peak = Not Run

CPU2017 License: 9017  
Test Sponsor: Lenovo Global Technology  
Tested by: Lenovo Global Technology

Test Date: Mar-2019  
Hardware Availability: Apr-2019  
Software Availability: Oct-2018

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	80	809	157	<b>805</b>	<b>158</b>	804	158							
502.gcc_r	80	656	173	<b>660</b>	<b>172</b>	661	171							
505.mcf_r	80	532	243	<b>533</b>	<b>242</b>	535	242							
520.omnetpp_r	80	835	126	<b>835</b>	<b>126</b>	838	125							
523.xalancbmk_r	80	<b>433</b>	<b>195</b>	432	196	434	195							
525.x264_r	80	<b>339</b>	<b>413</b>	338	414	339	413							
531.deepsjeng_r	80	511	180	<b>511</b>	<b>179</b>	512	179							
541.leela_r	80	750	177	756	175	<b>755</b>	<b>175</b>							
548.exchange2_r	80	529	396	530	395	<b>530</b>	<b>396</b>							
557.xz_r	80	583	148	<b>583</b>	<b>148</b>	584	148							

SPECrate2017\_int\_base = 204

SPECrate2017\_int\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2017-1.0.5-ic19/lib/ia32:/home/cpu2017-1.0.5-ic19/lib/intel64"  
LD\_LIBRARY\_PATH = "\$LD\_LIBRARY\_PATH:/home/cpu2017-1.0.5-ic19/je5.0.1-32:/home/cpu2017-1.0.5-ic19/je5.0.1-64"

Binaries compiled on a system with 1x Intel Core i9-799X CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.5

Transparent Huge Pages enabled by default  
Prior to runcpu invocation

Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

SPECrate2017\_int\_base = 204

ThinkSystem SR530  
(2.10 GHz, Intel Xeon Gold 6230)

SPECrate2017\_int\_peak = Not Run

**CPU2017 License:** 9017

**Test Date:** Mar-2019

**Test Sponsor:** Lenovo Global Technology

**Hardware Availability:** Apr-2019

**Tested by:** Lenovo Global Technology

**Software Availability:** Oct-2018

## General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2018-3640 (Spectre variant 3a) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2018-3639 (Spectre variant 4) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance

Choose Operating Mode set to Custom Mode

Memory Power Management set to Automatic

MONITOR/MWAIT set to Enable

SNC set to Enable

sysinfo program /home/cpu2017-1.0.5-ic19/bin/sysinfo

Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9

running on linux-2rva Mon Mar 18 19:19:38 2019

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Gold 6230 CPU @ 2.10GHz

2 "physical id"s (chips)

80 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 20

siblings : 40

physical 0: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28

physical 1: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28

From lscpu:

Architecture: x86\_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 80

On-line CPU(s) list: 0-79

Thread(s) per core: 2

Core(s) per socket: 20

Socket(s): 2

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate2017\_int\_base = 204

ThinkSystem SR530  
(2.10 GHz, Intel Xeon Gold 6230)

SPECrate2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Mar-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2019

Tested by: Lenovo Global Technology

Software Availability: Oct-2018

### Platform Notes (Continued)

```

NUMA node(s):          4
Vendor ID:             GenuineIntel
CPU family:            6
Model:                 85
Model name:            Intel(R) Xeon(R) Gold 6230 CPU @ 2.10GHz
Stepping:              6
CPU MHz:               2100.000
CPU max MHz:           3900.0000
CPU min MHz:           800.0000
BogoMIPS:              4200.00
Virtualization:       VT-x
L1d cache:             32K
L1i cache:             32K
L2 cache:              1024K
L3 cache:              28160K
NUMA node0 CPU(s):    0-2,5,6,10-12,15,16,40-42,45,46,50-52,55,56
NUMA node1 CPU(s):    3,4,7-9,13,14,17-19,43,44,47-49,53,54,57-59
NUMA node2 CPU(s):    20-22,25,26,30-32,35,36,60-62,65,66,70-72,75,76
NUMA node3 CPU(s):    23,24,27-29,33,34,37-39,63,64,67-69,73,74,77-79
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx fl6c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
invpcid_single ssbd mba ibrs ibpb stibp tpr_shadow vnmi flexpriority ept vpid
fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f
avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl
xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
dtherm ida arat pln pts pku ospke avx512_vnni flush_lld arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 28160 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0 1 2 5 6 10 11 12 15 16 40 41 42 45 46 50 51 52 55 56
node 0 size: 96366 MB
node 0 free: 96008 MB
node 1 cpus: 3 4 7 8 9 13 14 17 18 19 43 44 47 48 49 53 54 57 58 59
node 1 size: 96724 MB
node 1 free: 96251 MB
node 2 cpus: 20 21 22 25 26 30 31 32 35 36 60 61 62 65 66 70 71 72 75 76
node 2 size: 96753 MB
node 2 free: 96555 MB
node 3 cpus: 23 24 27 28 29 33 34 37 38 39 63 64 67 68 69 73 74 77 78 79

```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate2017\_int\_base = 204

ThinkSystem SR530  
(2.10 GHz, Intel Xeon Gold 6230)

SPECrate2017\_int\_peak = Not Run

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Mar-2019  
**Hardware Availability:** Apr-2019  
**Software Availability:** Oct-2018

### Platform Notes (Continued)

```
node 3 size: 96751 MB
node 3 free: 96570 MB
node distances:
node  0  1  2  3
  0:  10  11  21  21
  1:  11  10  21  21
  2:  21  21  10  11
  3:  21  21  11  10
```

```
From /proc/meminfo
MemTotal:          395874636 kB
HugePages_Total:      0
Hugepagesize:       2048 kB
```

```
From /etc/*release* /etc/*version*
SuSE-release:
  SUSE Linux Enterprise Server 12 (x86_64)
  VERSION = 12
  PATCHLEVEL = 4
  # This file is deprecated and will be removed in a future service pack or release.
  # Please check /etc/os-release for details about this release.
os-release:
  NAME="SLES"
  VERSION="12-SP4"
  VERSION_ID="12.4"
  PRETTY_NAME="SUSE Linux Enterprise Server 12 SP4"
  ID="sles"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:12:sp4"
```

```
uname -a:
Linux linux-2rva 4.12.14-94.41-default #1 SMP Wed Oct 31 12:25:04 UTC 2018 (3090901)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2017-5754 (Meltdown):          Not affected
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Indirect Branch Restricted Speculation,
IBPB, IBRS_FW
```

```
run-level 3 Mar 18 19:13
```

```
SPEC is set to: /home/cpu2017-1.0.5-ic19
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda3        xfs   892G  23G  870G   3% /
```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

SPECrate2017\_int\_base = 204

ThinkSystem SR530  
(2.10 GHz, Intel Xeon Gold 6230)

SPECrate2017\_int\_peak = Not Run

**CPU2017 License:** 9017

**Test Date:** Mar-2019

**Test Sponsor:** Lenovo Global Technology

**Hardware Availability:** Apr-2019

**Tested by:** Lenovo Global Technology

**Software Availability:** Oct-2018

## Platform Notes (Continued)

Additional information from dmidecode follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Lenovo -[TEE135L-2.10]- 01/10/2019

Memory:

12x SK Hynix HMA84GR7CJR4N-WM 32 GB 2 rank 2933

(End of data from sysinfo program)

## Compiler Version Notes

=====  
CC 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base) 525.x264\_r(base)  
557.xz\_r(base)

-----  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.0.117 Build 20180804  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----

=====  
CXXC 520.omnetpp\_r(base) 523.xalancbmk\_r(base) 531.deepsjeng\_r(base)  
541.leela\_r(base)

-----  
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.0.117 Build 20180804  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----

=====  
FC 548.exchange2\_r(base)

-----  
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.0.117 Build 20180804  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----

## Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate2017\_int\_base = 204

ThinkSystem SR530  
(2.10 GHz, Intel Xeon Gold 6230)

SPECrate2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Mar-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2019

Tested by: Lenovo Global Technology

Software Availability: Oct-2018

## Base Compiler Invocation (Continued)

Fortran benchmarks:

```
ifort -m64
```

## Base Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.0-official-linux64.2019-01-15.html>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-CLX-A.2019-04-02.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.0-official-linux64.2019-01-15.xml>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-CLX-A.2019-04-02.xml>



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

ThinkSystem SR530  
(2.10 GHz, Intel Xeon Gold 6230)

SPECrate2017\_int\_base = 204

SPECrate2017\_int\_peak = Not Run

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Mar-2019

**Hardware Availability:** Apr-2019

**Software Availability:** Oct-2018

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.5 on 2019-03-18 07:19:37-0400.

Report generated on 2019-04-02 17:01:02 by CPU2017 PDF formatter v6067.

Originally published on 2019-04-02.