



# SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SN850  
(3.80 GHz, Intel Xeon Platinum 8256)

SPECrate2017\_fp\_base = 154

SPECrate2017\_fp\_peak = Not Run

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: May-2019

Hardware Availability: Apr-2019

Software Availability: Nov-2018

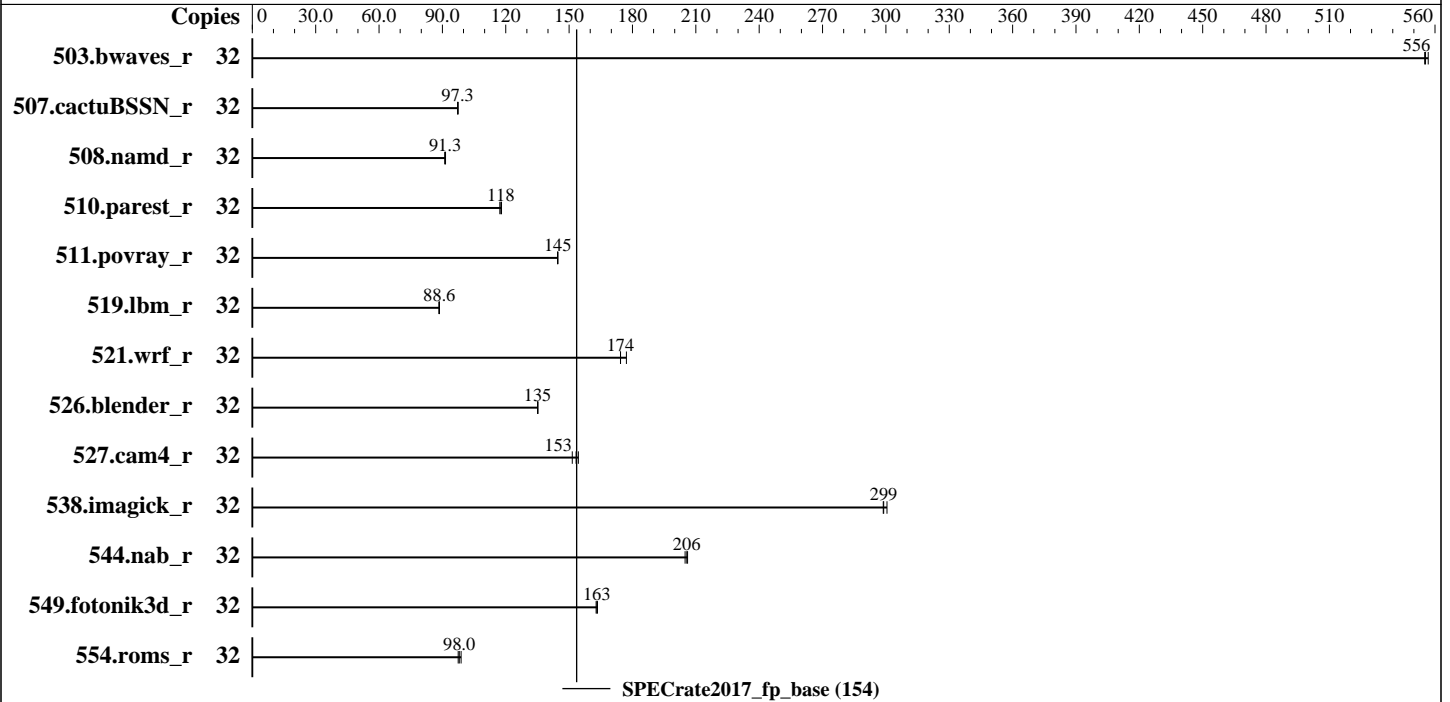

### Hardware

CPU Name: Intel Xeon Platinum 8256  
 Max MHz.: 3900  
 Nominal: 3800  
 Enabled: 16 cores, 4 chips, 2 threads/core  
 Orderable: 2,4 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 16.5 MB I+D on chip per chip  
 Other: None  
 Memory: 1536 GB (48 x 32 GB 2Rx4 PC4-2933Y-R, running at 2666)  
 Storage: 1 x 960 GB SATA SSD  
 Other: None

### Software

OS: Red Hat Enterprise Linux Server release 7.6 (Maipo)  
 Kernel 3.10.0-957.el7.x86\_64  
 Compiler: C/C++: Version 19.0.1.144 of Intel C/C++ Compiler Build 20181018 for Linux;  
 Fortran: Version 19.0.1.144 of Intel Fortran Compiler Build 20181018 for Linux  
 Parallel: No  
 Firmware: Lenovo BIOS Version IVE135L 2.10 released Jan-2019  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: None



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SN850  
(3.80 GHz, Intel Xeon Platinum 8256)

SPECrate2017\_fp\_base = 154

SPECrate2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: May-2019

Hardware Availability: Apr-2019

Software Availability: Nov-2018

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	32	<b>578</b>	<b>556</b>	576	557	578	555							
507.cactuBSSN_r	32	417	97.2	416	97.4	<b>417</b>	<b>97.3</b>							
508.namd_r	32	332	91.5	<b>333</b>	<b>91.3</b>	334	91.1							
510.parest_r	32	709	118	<b>711</b>	<b>118</b>	714	117							
511.povray_r	32	517	145	517	145	<b>517</b>	<b>145</b>							
519.lbm_r	32	381	88.6	<b>381</b>	<b>88.6</b>	382	88.3							
521.wrf_r	32	<b>411</b>	<b>174</b>	411	174	405	177							
526.blender_r	32	<b>361</b>	<b>135</b>	361	135	361	135							
527.cam4_r	32	<b>365</b>	<b>153</b>	369	151	363	154							
538.imagick_r	32	266	299	<b>266</b>	<b>299</b>	265	301							
544.nab_r	32	261	206	<b>262</b>	<b>206</b>	263	205							
549.fotonik3d_r	32	766	163	<b>764</b>	<b>163</b>	763	163							
554.roms_r	32	522	97.5	<b>519</b>	<b>98.0</b>	514	98.9							

SPECrate2017\_fp\_base = 154

SPECrate2017\_fp\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2017-1.0.5-ic19.0u1/lib/intel64"

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.5  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate2017\_fp\_base = 154

ThinkSystem SN850  
(3.80 GHz, Intel Xeon Platinum 8256)

SPECrate2017\_fp\_peak = Not Run

**CPU2017 License:** 9017

**Test Date:** May-2019

**Test Sponsor:** Lenovo Global Technology

**Hardware Availability:** Apr-2019

**Tested by:** Lenovo Global Technology

**Software Availability:** Nov-2018

### General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2018-3640 (Spectre variant 3a) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2018-3639 (Spectre variant 4) is mitigated in the system as tested and documented.

### Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance

SNC set to Enable

LLC dead line alloc set to Disable

```
Sysinfo program /home/cpu2017-1.0.5-ic19.0u1/bin/sysinfo
Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9
running on localhost.localdomain Tue May 14 09:51:21 2019
```

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Platinum 8256 CPU @ 3.80GHz
 4 "physical id"s (chips)
 32 "processors"
```

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 4
siblings : 8
physical 0: cores 4 8 9 13
physical 1: cores 2 5 9 13
physical 2: cores 1 2 5 13
physical 3: cores 1 5 9 13
```

From lscpu:

```
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
CPU(s): 32
On-line CPU(s) list: 0-31
Thread(s) per core: 2
Core(s) per socket: 4
Socket(s): 4
NUMA node(s): 8
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate2017\_fp\_base = 154

ThinkSystem SN850  
(3.80 GHz, Intel Xeon Platinum 8256)

SPECrate2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: May-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2019

Tested by: Lenovo Global Technology

Software Availability: Nov-2018

### Platform Notes (Continued)

```

Vendor ID:           GenuineIntel
CPU family:         6
Model:              85
Model name:         Intel(R) Xeon(R) Platinum 8256 CPU @ 3.80GHz
Stepping:           6
CPU MHz:            3800.000
BogoMIPS:           7600.00
Virtualization:     VT-x
L1d cache:          32K
L1i cache:          32K
L2 cache:           1024K
L3 cache:           16896K
NUMA node0 CPU(s): 0,2,17,18
NUMA node1 CPU(s): 1,3,16,19
NUMA node2 CPU(s): 4,6,20,22
NUMA node3 CPU(s): 5,7,21,23
NUMA node4 CPU(s): 8,9,24,25
NUMA node5 CPU(s): 10,11,26,27
NUMA node6 CPU(s): 12,14,28,30
NUMA node7 CPU(s): 13,15,29,31
Flags:              fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpperf eagerfpu pni pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx f16c rdrand lahf_lm abm 3dnowprefetch epb cat_l3 cdp_l3 intel_pt ssbd mba ibrs
ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust
bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f avx512dq rdseed adx
smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 cqm_llc
cqm_occup_llc cqm_mbm_total cqm_mbm_local dtherm ida arat pln pts pku ospke
avx512_vnni spec_ctrl intel_stibp flush_lld arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 16896 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 8 nodes (0-7)
node 0 cpus: 0 2 17 18
node 0 size: 196278 MB
node 0 free: 191856 MB
node 1 cpus: 1 3 16 19
node 1 size: 196608 MB
node 1 free: 192272 MB
node 2 cpus: 4 6 20 22
node 2 size: 196608 MB
node 2 free: 192042 MB

```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate2017\_fp\_base = 154

ThinkSystem SN850  
(3.80 GHz, Intel Xeon Platinum 8256)

SPECrate2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: May-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2019

Tested by: Lenovo Global Technology

Software Availability: Nov-2018

### Platform Notes (Continued)

```

node 3 cpus: 5 7 21 23
node 3 size: 196608 MB
node 3 free: 192222 MB
node 4 cpus: 8 9 24 25
node 4 size: 196608 MB
node 4 free: 192271 MB
node 5 cpus: 10 11 26 27
node 5 size: 196608 MB
node 5 free: 192272 MB
node 6 cpus: 12 14 28 30
node 6 size: 196608 MB
node 6 free: 192287 MB
node 7 cpus: 13 15 29 31
node 7 size: 196608 MB
node 7 free: 192121 MB
node distances:
node  0  1  2  3  4  5  6  7
  0:  10  11  21  21  21  21  21  21
  1:  11  10  21  21  21  21  21  21
  2:  21  21  10  11  21  21  21  21
  3:  21  21  11  10  21  21  21  21
  4:  21  21  21  21  10  11  21  21
  5:  21  21  21  21  11  10  21  21
  6:  21  21  21  21  21  21  10  11
  7:  21  21  21  21  21  21  11  10

```

From /proc/meminfo

```

MemTotal:      1584959392 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

From /etc/\*release\* /etc/\*version\*

```

os-release:
  NAME="Red Hat Enterprise Linux Server"
  VERSION="7.6 (Maipo)"
  ID="rhel"
  ID_LIKE="fedora"
  VARIANT="Server"
  VARIANT_ID="server"
  VERSION_ID="7.6"
  PRETTY_NAME="Red Hat Enterprise Linux Server 7.6 (Maipo)"
  redhat-release: Red Hat Enterprise Linux Server release 7.6 (Maipo)
  system-release: Red Hat Enterprise Linux Server release 7.6 (Maipo)
  system-release-cpe: cpe:/o:redhat:enterprise_linux:7.6:ga:server

```

uname -a:

Linux localhost.localdomain 3.10.0-957.el7.x86\_64 #1 SMP Thu Oct 4 20:48:51 UTC 2018

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

SPECrate2017\_fp\_base = 154

ThinkSystem SN850  
(3.80 GHz, Intel Xeon Platinum 8256)

SPECrate2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: May-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2019

Tested by: Lenovo Global Technology

Software Availability: Nov-2018

## Platform Notes (Continued)

x86\_64 x86\_64 x86\_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2017-5754 (Meltdown): Not affected

CVE-2017-5753 (Spectre variant 1): Mitigation: Load fences, \_\_user pointer sanitization

CVE-2017-5715 (Spectre variant 2): Mitigation: Enhanced IBRS

run-level 3 May 14 09:48

SPEC is set to: /home/cpu2017-1.0.5-ic19.0u1

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sdb2	xfs	839G	14G	826G	2%	/home

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Lenovo -[IVE135L-2.10]- 01/10/2019

Memory:

48x Samsung M393A4K40CB2-CVF 32 GB 2 rank 2933, configured at 2666

(End of data from sysinfo program)

## Compiler Version Notes

=====  
CC 519.lbm\_r(base) 538.imagick\_r(base) 544.nab\_r(base)  
-----

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.1.144 Build 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----

=====  
CXXC 508.namd\_r(base) 510.parest\_r(base)  
-----

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.1.144 Build 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----

=====  
CC 511.povray\_r(base) 526.blender\_r(base)  
-----

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

SPECrate2017\_fp\_base = 154

ThinkSystem SN850  
(3.80 GHz, Intel Xeon Platinum 8256)

SPECrate2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: May-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2019

Tested by: Lenovo Global Technology

Software Availability: Nov-2018

## Compiler Version Notes (Continued)

Version 19.0.1.144 Build 20181018  
 Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
 Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
 Version 19.0.1.144 Build 20181018  
 Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====

FC 507.cactuBSSN\_r(base)

-----

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
 Version 19.0.1.144 Build 20181018  
 Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
 Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
 Version 19.0.1.144 Build 20181018  
 Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
 Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
 64, Version 19.0.1.144 Build 20181018  
 Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====

FC 503.bwaves\_r(base) 549.fotonik3d\_r(base) 554.roms\_r(base)

-----

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
 64, Version 19.0.1.144 Build 20181018  
 Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====

CC 521.wrf\_r(base) 527.cam4\_r(base)

-----

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
 64, Version 19.0.1.144 Build 20181018  
 Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
 Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
 Version 19.0.1.144 Build 20181018  
 Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:  
 icc -m64 -std=c11

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate2017\_fp\_base = 154

ThinkSystem SN850  
(3.80 GHz, Intel Xeon Platinum 8256)

SPECrate2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: May-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2019

Tested by: Lenovo Global Technology

Software Availability: Nov-2018

## Base Compiler Invocation (Continued)

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

ifort -m64 icc -m64 -std=c11

Benchmarks using both C and C++:

icpc -m64 icc -m64 -std=c11

Benchmarks using Fortran, C, and C++:

icpc -m64 icc -m64 -std=c11 ifort -m64

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64

507.cactuBSSN\_r: -DSPEC\_LP64

508.namd\_r: -DSPEC\_LP64

510.parest\_r: -DSPEC\_LP64

511.povray\_r: -DSPEC\_LP64

519.lbm\_r: -DSPEC\_LP64

521.wrf\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian

526.blender\_r: -DSPEC\_LP64 -DSPEC\_LINUX -funsigned-char

527.cam4\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG

538.imagick\_r: -DSPEC\_LP64

544.nab\_r: -DSPEC\_LP64

549.fotonik3d\_r: -DSPEC\_LP64

554.roms\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4

(Continued on next page)





# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

SPECrate2017\_fp\_base = 154

ThinkSystem SN850  
(3.80 GHz, Intel Xeon Platinum 8256)

SPECrate2017\_fp\_peak = Not Run

**CPU2017 License:** 9017

**Test Date:** May-2019

**Test Sponsor:** Lenovo Global Technology

**Hardware Availability:** Apr-2019

**Tested by:** Lenovo Global Technology

**Software Availability:** Nov-2018

## Base Optimization Flags (Continued)

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs
-align array32byte
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs
-align array32byte
```

Benchmarks using both C and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs
-align array32byte
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.html>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-CLX-A.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.xml>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-CLX-A.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.5 on 2019-05-13 21:51:20-0400.

Report generated on 2019-06-11 17:24:00 by CPU2017 PDF formatter v6067.

Originally published on 2019-06-11.