



SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX840c (Intel Xeon Gold 6246, 3.30GHz)

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.


SPECrate2017_fp_base = 366

SPECrate2017_fp_peak = 376

Test Date: Mar-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

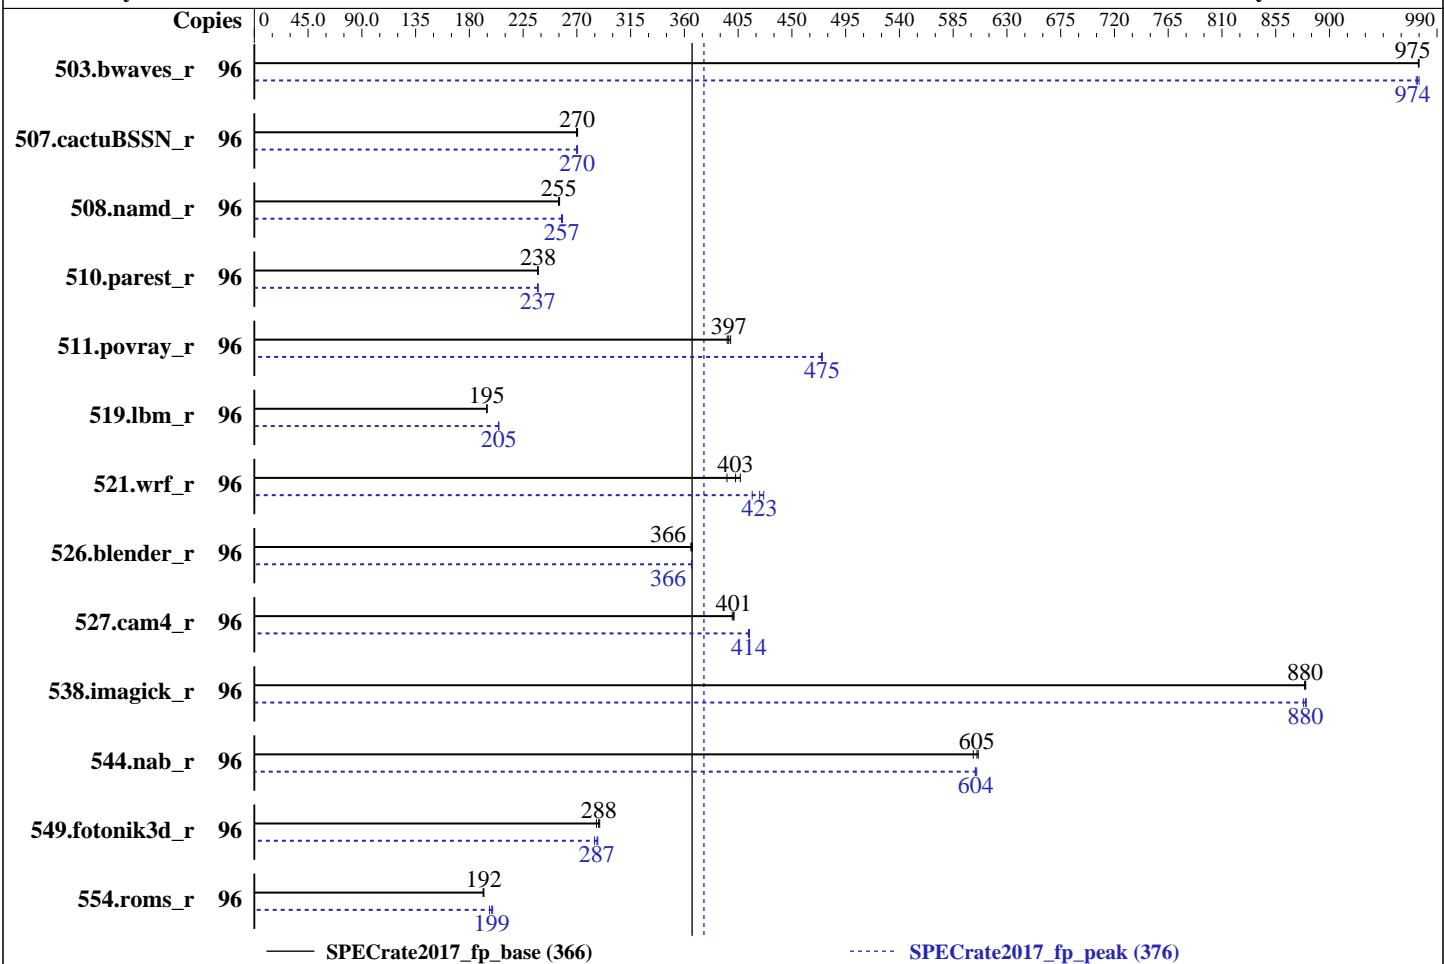

Hardware

CPU Name: Intel Xeon Gold 6246
 Max MHz.: 4200
 Nominal: 3300
 Enabled: 48 cores, 4 chips, 2 threads/core
 Orderable: 2,4 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 24.75 MB I+D on chip per chip
 Other: None
 Memory: 384 GB (24 x 16 GB 2Rx8 PC4-2933Y-R)
 Storage: 1 x 480 GB SATA SSD
 Other: None

Software

OS: Ubuntu 18.04.2 LTS
 Compiler: kernel 4.15.0-45-generic
 C/C++: Version 19.0.1.144 of Intel C/C++
 Compiler Build 20181018 for Linux;
 Fortran: Version 19.0.1.144 of Intel Fortran
 Compiler Build 20181018 for Linux
 Parallel: No
 Firmware: Version 2.2.9 released May-2019
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX840c (Intel Xeon Gold 6246, 3.30GHz)

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECrate2017_fp_base = 366

SPECrate2017_fp_peak = 376

Test Date: Mar-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	96	988	974	988	975	988	975	96	987	975	990	973	989	974
507.cactusBSSN_r	96	450	270	449	271	450	270	96	450	270	451	270	449	271
508.namd_r	96	357	256	358	255	358	255	96	354	258	354	257	355	257
510.parest_r	96	1057	238	1059	237	1057	238	96	1059	237	1057	238	1058	237
511.povray_r	96	566	396	562	399	565	397	96	472	475	472	475	472	475
519.lbm_r	96	519	195	520	195	520	195	96	495	205	495	204	494	205
521.wrf_r	96	534	403	544	396	529	407	96	516	417	508	423	504	426
526.blender_r	96	399	366	399	367	400	365	96	399	366	399	366	400	366
527.cam4_r	96	418	401	420	400	418	402	96	405	415	405	414	406	414
538.imagick_r	96	271	880	272	879	271	880	96	271	881	272	878	271	880
544.nab_r	96	267	606	267	605	268	602	96	268	604	268	603	267	605
549.fotonik3d_r	96	1294	289	1306	286	1298	288	96	1304	287	1314	285	1301	288
554.roms_r	96	794	192	794	192	797	191	96	768	199	764	200	775	197

SPECrate2017_fp_base = 366

SPECrate2017_fp_peak = 376

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64"

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Transparent Huge Pages enabled by default

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_fp_base = 366

SPECrate2017_fp_peak = 376

PowerEdge MX840c (Intel Xeon Gold 6246, 3.30GHz)

CPU2017 License: 55

Test Date: Mar-2019

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2019

Tested by: Dell Inc.

Software Availability: Feb-2019

General Notes (Continued)

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

runcpu command invoked through numactl i.e.:

```
numactl --interleave=all runcpu <etc>
```

Platform Notes

BIOS settings:

ADDDC setting disabled

Sub NUMA Cluster enabled

Virtualization Technology disabled

DCU Streamer Prefetcher enabled

System Profile set to Custom

CPU Performance set to Maximum Performance

C States set to Autonomous

C1E disabled

Uncore Frequency set to Dynamic

Energy Efficiency Policy set to Performance

Memory Patrol Scrub disabled

Logical Processor enabled

CPU Interconnect Bus Link Power Management disabled

PCI ASPM L1 Link Power Management disabled

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9

running on intel-sut Wed May 22 20:50:03 2019

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Gold 6246 CPU @ 3.30GHz

4 "physical id"s (chips)

96 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 12

siblings : 24

physical 0: cores 1 2 3 4 8 9 10 11 17 18 25 27

physical 1: cores 0 2 3 4 8 9 10 11 17 18 25 27

physical 2: cores 0 2 4 8 9 10 17 18 19 20 25 27

physical 3: cores 0 2 4 8 9 10 11 17 18 19 25 27

From lscpu:

Architecture: x86_64

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_fp_base = 366

SPECrate2017_fp_peak = 376

CPU2017 License: 55

Test Date: Mar-2019

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2019

Tested by: Dell Inc.

Software Availability: Feb-2019

Platform Notes (Continued)

```

CPU op-mode(s):           32-bit, 64-bit
Byte Order:               Little Endian
CPU(s):                  96
On-line CPU(s) list:     0-95
Thread(s) per core:      2
Core(s) per socket:       12
Socket(s):                4
NUMA node(s):             8
Vendor ID:                GenuineIntel
CPU family:               6
Model:                   85
Model name:               Intel(R) Xeon(R) Gold 6246 CPU @ 3.30GHz
Stepping:                 7
CPU MHz:                  3155.577
BogoMIPS:                 6600.00
Virtualization:           VT-x
L1d cache:                32K
L1i cache:                32K
L2 cache:                  1024K
L3 cache:                  25344K
NUMA node0 CPU(s):        0,8,16,24,32,40,48,56,64,72,80,88
NUMA node1 CPU(s):        1,9,17,25,33,41,49,57,65,73,81,89
NUMA node2 CPU(s):        2,10,18,22,26,42,50,58,66,70,74,90
NUMA node3 CPU(s):        3,11,19,27,35,43,51,59,67,75,83,91
NUMA node4 CPU(s):        4,12,20,28,36,44,52,60,68,76,84,92
NUMA node5 CPU(s):        5,13,21,29,37,45,53,61,69,77,85,93
NUMA node6 CPU(s):        6,14,30,34,38,46,54,62,78,82,86,94
NUMA node7 CPU(s):        7,15,23,31,39,47,55,63,71,79,87,95
Flags:                    fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
                          pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                          lm constant_tsc art arch_perfmon pebs bts rep_good nogpl xtopology nonstop_tsc cpuid
                          aperfmpfperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
                          xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand
                          lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3 invpcid_single intel_ppin
                          ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid
                          fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f
                          avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl
                          xsaveopt xsavec xgetbv1 xsaves cqmq_llc cqmq_occup_llc cqmq_mbm_total cqmq_mbm_local
                          dtherm ida arat pln pts pku ospke avx512_vnni flush_lld arch_capabilities

```

```
/proc/cpuinfo cache data
cache size : 25344 KB
```

```
From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
physical chip.
```

```
available: 8 nodes (0-7)
node 0 cpus: 0 8 16 24 32 40 48 56 64 72 80 88
```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX840c (Intel Xeon Gold 6246, 3.30GHz)

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECrate2017_fp_base = 366

SPECrate2017_fp_peak = 376

Test Date: Mar-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

Platform Notes (Continued)

```
node 0 size: 46764 MB
node 0 free: 46464 MB
node 1 cpus: 1 9 17 25 33 41 49 57 65 73 81 89
node 1 size: 48381 MB
node 1 free: 48097 MB
node 2 cpus: 2 10 18 22 26 42 50 58 66 70 74 90
node 2 size: 48381 MB
node 2 free: 48092 MB
node 3 cpus: 3 11 19 27 35 43 51 59 67 75 83 91
node 3 size: 48381 MB
node 3 free: 48100 MB
node 4 cpus: 4 12 20 28 36 44 52 60 68 76 84 92
node 4 size: 48381 MB
node 4 free: 48068 MB
node 5 cpus: 5 13 21 29 37 45 53 61 69 77 85 93
node 5 size: 48360 MB
node 5 free: 48000 MB
node 6 cpus: 6 14 30 34 38 46 54 62 78 82 86 94
node 6 size: 48381 MB
node 6 free: 48109 MB
node 7 cpus: 7 15 23 31 39 47 55 63 71 79 87 95
node 7 size: 48380 MB
node 7 free: 48083 MB
node distances:
node 0 1 2 3 4 5 6 7
 0: 10 21 21 21 11 21 21 21
 1: 21 10 21 21 21 11 21 21
 2: 21 21 10 21 21 21 11 21
 3: 21 21 21 10 21 21 21 11
 4: 11 21 21 21 10 21 21 21
 5: 21 11 21 21 21 10 21 21
 6: 21 21 11 21 21 21 10 21
 7: 21 21 21 11 21 21 21 10
```

```
From /proc/meminfo
MemTotal:      394663320 kB
HugePages_Total:      0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
Ubuntu 18.04.2 LTS
```

```
From /etc/*release* /etc/*version*
debian_version: buster/sid
os-release:
NAME="Ubuntu"
VERSION="18.04.2 LTS (Bionic Beaver)"
```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX840c (Intel Xeon Gold 6246, 3.30GHz)

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECrate2017_fp_base = 366

SPECrate2017_fp_peak = 376

Test Date: Mar-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

Platform Notes (Continued)

```
ID=ubuntu
ID_LIKE=debian
PRETTY_NAME="Ubuntu 18.04.2 LTS"
VERSION_ID="18.04"
HOME_URL="https://www.ubuntu.com/"
SUPPORT_URL="https://help.ubuntu.com/"
```

uname -a:

```
Linux intel-sut 4.15.0-45-generic #48-Ubuntu SMP Tue Jan 29 16:28:13 UTC 2019 x86_64
x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2017-5754 (Meltdown): Not affected
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Enhanced IBRS, IBPB
```

run-level 3 May 22 13:47

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda2	ext4	439G	19G	398G	5%	/

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Dell Inc. 2.2.9 05/08/2019

Memory:

```
19x 00AD00B300AD HMA82GR7CJR8N-WM 16 GB 2 rank 2933
5x 00AD063200AD HMA82GR7CJR8N-WM 16 GB 2 rank 2933
24x Not Specified Not Specified
```

(End of data from sysinfo program)

Compiler Version Notes

```
=====
CC 519.lbm_r(base) 538.imagick_r(base, peak) 544.nab_r(base, peak)
-----
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
-----
=====
```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX840c (Intel Xeon Gold 6246, 3.30GHz)

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECrate2017_fp_base = 366

SPECrate2017_fp_peak = 376

Test Date: Mar-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

Compiler Version Notes (Continued)

CC 519.lbm_r(peak)

```
=====
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
```

CXXC 508.namd_r(base) 510.parest_r(base, peak)

```
=====
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
```

CXXC 508.namd_r(peak)

```
=====
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
```

CC 511.povray_r(base) 526.blender_r(base, peak)

```
=====
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
```

```
=====
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.1.144 Build 20181018
```

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,

Version 19.0.1.144 Build 20181018

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

```
=====
CC 511.povray_r(peak)
```

=====
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.1.144 Build 20181018

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,

Version 19.0.1.144 Build 20181018

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
FC 507.cactubSSN_r(base, peak)

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX840c (Intel Xeon Gold 6246, 3.30GHz)

SPECrate2017_fp_base = 366

SPECrate2017_fp_peak = 376

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Mar-2019
Hardware Availability: Apr-2019
Software Availability: Feb-2019

Compiler Version Notes (Continued)

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
FC 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
FC 554.roms_r(peak)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
CC 521.wrf_r(base) 527.cam4_r(base)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
CC 521.wrf_r(peak) 527.cam4_r(peak)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.1.144 Build 20181018

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX840c (Intel Xeon Gold 6246, 3.30GHz)

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECrate2017_fp_base = 366

SPECrate2017_fp_peak = 376

Test Date: Mar-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

Compiler Version Notes (Continued)

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

ifort -m64 icc -m64 -std=c11

Benchmarks using both C and C++:

icpc -m64icc -m64 -std=c11

Benchmarks using Fortran, C, and C++:

icpc -m64icc -m64 -std=c11 ifort -m64

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX840c (Intel Xeon Gold 6246, 3.30GHz)

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECrate2017_fp_base = 366

SPECrate2017_fp_peak = 376

Test Date: Mar-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs  
-align array32byte
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs  
-align array32byte
```

Benchmarks using both C and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs  
-align array32byte
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using both C and C++:

```
icpc -m64 icc -m64 -std=c11
```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX840c (Intel Xeon Gold 6246, 3.30GHz)

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECrate2017_fp_base = 366

SPECrate2017_fp_peak = 376

Test Date: Mar-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

Peak Compiler Invocation (Continued)

Benchmarks using Fortran, C, and C++:

```
icpc -m64icc -m64 -std=c11 ifort -m64
```

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
519.lbm_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4
```

```
538.imagick_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4
```

544.nab_r: Same as 538.imagick_r

C++ benchmarks:

```
508.namd_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4
```

```
510.parest_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4
```

Fortran benchmarks:

```
503.bwaves_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -auto  
-nostandard-realloc-lhs -align array32byte
```

549.fotonik3d_r: Same as 503.bwaves_r

```
554.roms_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs  
-align array32byte
```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX840c (Intel Xeon Gold 6246, 3.30GHz)

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECrate2017_fp_base = 366

SPECrate2017_fp_peak = 376

Test Date: Mar-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

```
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs  
-align array32byte
```

Benchmarks using both C and C++:

```
511.povray_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4
```

```
526.blender_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs  
-align array32byte
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.html>
<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revE2.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.xml>
<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revE2.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.5 on 2019-05-22 16:50:02-0400.

Report generated on 2019-07-09 15:49:32 by CPU2017 PDF formatter v6067.

Originally published on 2019-07-09.