



# SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX740 (Intel Xeon Gold 6244, 3.60GHz)

CPU2017 License: 55


Test Date: Jul-2019

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2019

Tested by: Dell Inc.

Software Availability: May-2019

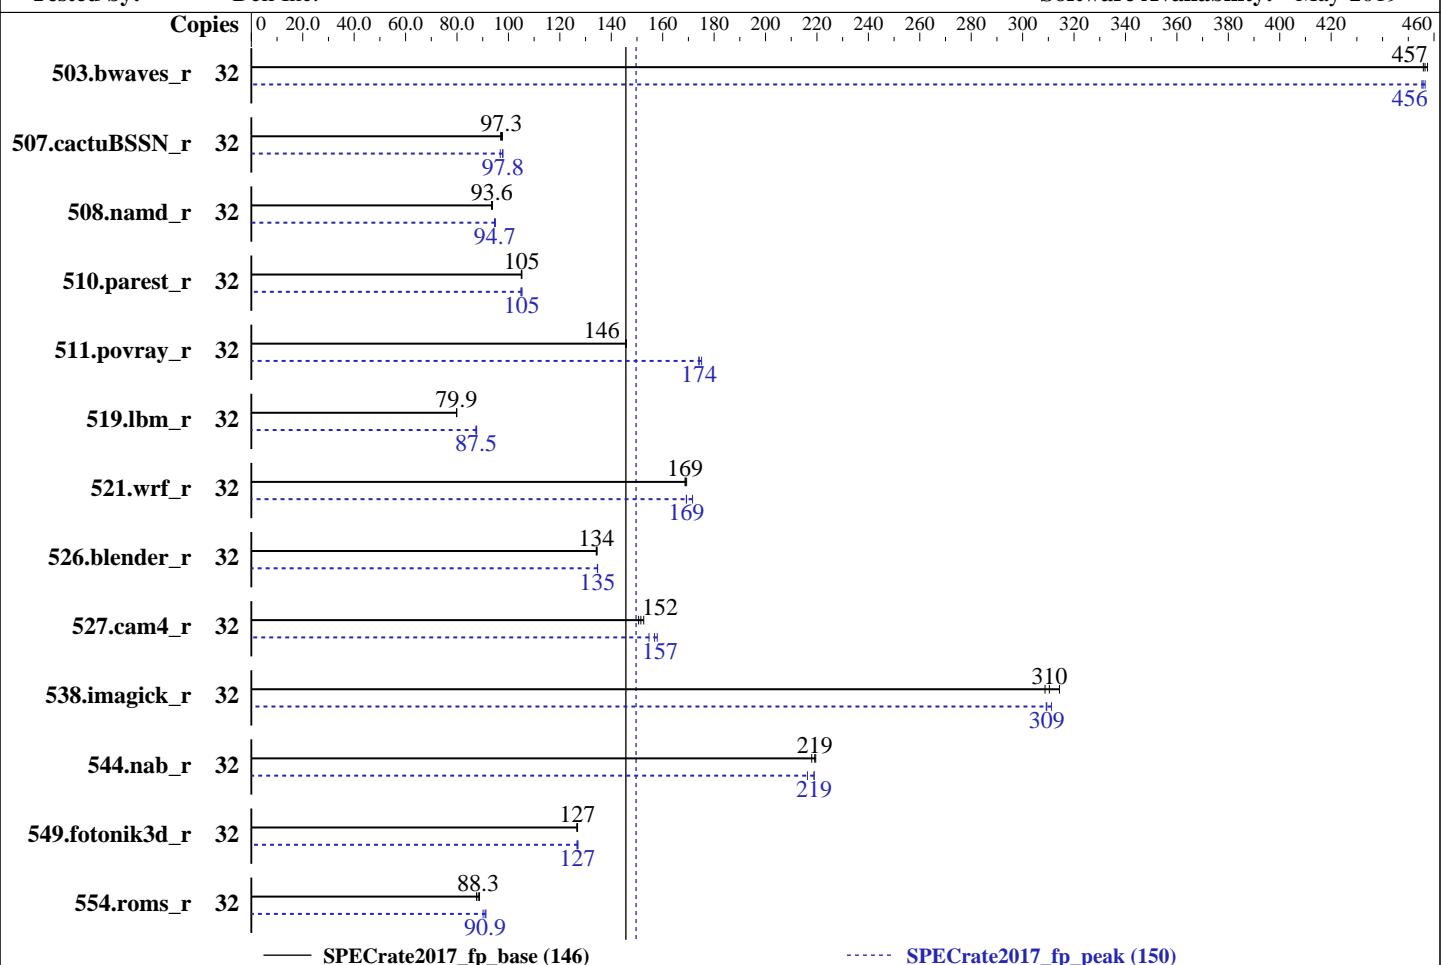

— SPECrate2017\_fp\_base (146)

----- SPECrate2017\_fp\_peak (150)

## Hardware

CPU Name: Intel Xeon Gold 6244  
 Max MHz.: 4400  
 Nominal: 3600  
 Enabled: 16 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 24.75 MB I+D on chip per chip  
 Other: None  
 Memory: 384 GB (12 x 32 GB 2Rx4 PC4-2933Y-R)  
 Storage: 1 x 480 GB SATA SSD  
 Other: None

## Software

OS: Ubuntu 18.04.2 LTS  
 Compiler: kernel 4.15.0-47-generic  
 C/C++: Version 19.0.4.227 of Intel C/C++  
 Compiler Build 20190416 for Linux;  
 Fortran: Version 19.0.4.227 of Intel Fortran  
 Compiler Build 20190416 for Linux  
 Parallel: No  
 Firmware: Version 2.1.6 released Mar-2019  
 File System: ext4  
 System State: Run level 5 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

**SPECrate2017\_fp\_base = 146**

**SPECrate2017\_fp\_peak = 150**

CPU2017 License: 55

Test Date: Jul-2019

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2019

Tested by: Dell Inc.

Software Availability: May-2019

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	32	<b>703</b>	<b>457</b>	701	457	704	456	32	<b>704</b>	<b>456</b>	705	455	703	457
507.cactuBSSN_r	32	418	97.0	415	97.7	<b>416</b>	<b>97.3</b>	32	414	97.8	<b>414</b>	<b>97.8</b>	418	96.8
508.namd_r	32	325	93.4	<b>325</b>	<b>93.6</b>	324	93.8	32	320	94.9	321	94.6	<b>321</b>	<b>94.7</b>
510.parest_r	32	796	105	<b>796</b>	<b>105</b>	797	105	32	<b>796</b>	<b>105</b>	796	105	798	105
511.povray_r	32	<b>513</b>	<b>146</b>	513	146	512	146	32	<b>429</b>	<b>174</b>	429	174	427	175
519.lbm_r	32	422	79.8	422	79.9	<b>422</b>	<b>79.9</b>	32	386	87.4	<b>386</b>	<b>87.5</b>	385	87.6
521.wrf_r	32	425	169	<b>425</b>	<b>169</b>	423	169	32	424	169	<b>423</b>	<b>169</b>	418	172
526.blender_r	32	363	134	362	134	<b>363</b>	<b>134</b>	32	<b>362</b>	<b>135</b>	362	135	362	135
527.cam4_r	32	367	153	<b>369</b>	<b>152</b>	372	151	32	354	158	<b>357</b>	<b>157</b>	362	155
538.imagick_r	32	<b>256</b>	<b>310</b>	253	314	258	309	32	<b>257</b>	<b>309</b>	257	309	256	311
544.nab_r	32	245	220	<b>246</b>	<b>219</b>	247	218	32	<b>246</b>	<b>219</b>	246	219	249	216
549.fotonik3d_r	32	983	127	985	127	<b>983</b>	<b>127</b>	32	<b>983</b>	<b>127</b>	984	127	982	127
554.roms_r	32	580	87.6	<b>576</b>	<b>88.3</b>	573	88.8	32	<b>559</b>	<b>90.9</b>	564	90.1	557	91.2

**SPECrate2017\_fp\_base = 146**

**SPECrate2017\_fp\_peak = 150**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64"

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Transparent Huge Pages enabled by default

Prior to runcpu invocation

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 146

SPECrate2017\_fp\_peak = 150

PowerEdge MX740 (Intel Xeon Gold 6244, 3.60GHz)

CPU2017 License: 55

Test Date: Jul-2019

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2019

Tested by: Dell Inc.

Software Availability: May-2019

## General Notes (Continued)

Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

## Platform Notes

BIOS settings:  
ADDDC setting disabled  
Sub NUMA Cluster enabled  
Virtualization Technology disabled  
System Profile set to Custom  
CPU Performance set to Maximum Performance  
C States set to Autonomous  
C1E disabled  
Uncore Frequency set to Dynamic  
Energy Efficiency Policy set to Performance  
Memory Patrol Scrub disabled  
Logical Processor enabled  
CPU Interconnect Bus Link Power Management disabled  
PCI ASPM L1 Link Power Management disabled  
Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9  
running on intel-sut Wed Jul 3 00:46:11 2019

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) Gold 6244 CPU @ 3.60GHz  
2 "physical id"s (chips)  
32 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following  
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
cpu cores : 8  
siblings : 16  
physical 0: cores 2 3 4 9 17 18 25 27  
physical 1: cores 2 3 4 9 17 18 25 27

From lscpu:  
Architecture: x86\_64  
CPU op-mode(s): 32-bit, 64-bit  
Byte Order: Little Endian  
CPU(s): 32  
On-line CPU(s) list: 0-31

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

**SPECrate2017\_fp\_base = 146**

**SPECrate2017\_fp\_peak = 150**

CPU2017 License: 55

Test Date: Jul-2019

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2019

Tested by: Dell Inc.

Software Availability: May-2019

## Platform Notes (Continued)

```

Thread(s) per core: 2
Core(s) per socket: 8
Socket(s): 2
NUMA node(s): 4
Vendor ID: GenuineIntel
CPU family: 6
Model: 85
Model name: Intel(R) Xeon(R) Gold 6244 CPU @ 3.60GHz
Stepping: 6
CPU MHz: 2945.120
BogoMIPS: 7200.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 25344K
NUMA node0 CPU(s): 0,6,8,12,16,22,24,28
NUMA node1 CPU(s): 1,7,9,13,17,23,25,29
NUMA node2 CPU(s): 2,4,10,14,18,20,26,30
NUMA node3 CPU(s): 3,5,11,15,19,21,27,31
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtTopology nonstop_tsc cpuid
aperfmperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand
lahf_lm abm 3dnnowprefetch cpuid_fault epb cat_l3 cdp_l3 invpcid_single ssbd mba ibrs
ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust
bmil hle avx2 smep bmi2 erms invpcid rtm cqmp mpx rdt_a avx512f avx512dq rdseed adx
smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1
xsaves cqmm_llc cqmm_occup_llc cqmm_mbm_total cqmm_mbm_local dtherm ida arat pln pts pku
ospke avx512_vnni flush_lld arch_capabilities

```

```
/proc/cpuinfo cache data
cache size : 25344 KB
```

```
From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
physical chip.
```

```

available: 4 nodes (0-3)
node 0 cpus: 0 6 8 12 16 22 24 28
node 0 size: 95169 MB
node 0 free: 94749 MB
node 1 cpus: 1 7 9 13 17 23 25 29
node 1 size: 96745 MB
node 1 free: 96346 MB
node 2 cpus: 2 4 10 14 18 20 26 30
node 2 size: 96766 MB
node 2 free: 96335 MB

```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 146

SPECrate2017\_fp\_peak = 150

CPU2017 License: 55

Test Date: Jul-2019

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2019

Tested by: Dell Inc.

Software Availability: May-2019

## Platform Notes (Continued)

```
node 3 cpus: 3 5 11 15 19 21 27 31
node 3 size: 96765 MB
node 3 free: 96260 MB
node distances:
node 0 1 2 3
 0: 10 21 11 21
 1: 21 10 21 11
 2: 11 21 10 21
 3: 21 11 21 10

From /proc/meminfo
MemTotal:      394698232 kB
HugePages_Total:       0
Hugepagesize:     2048 kB

/usr/bin/lsb_release -d
Ubuntu 18.04.2 LTS

From /etc/*release* /etc/*version*
debian_version: buster/sid
os-release:
NAME="Ubuntu"
VERSION="18.04.2 LTS (Bionic Beaver)"
ID=ubuntu
ID_LIKE=debian
PRETTY_NAME="Ubuntu 18.04.2 LTS"
VERSION_ID="18.04"
HOME_URL="https://www.ubuntu.com/"
SUPPORT_URL="https://help.ubuntu.com/"

uname -a:
Linux intel-sut 4.15.0-47-generic #50-Ubuntu SMP Wed Mar 13 10:44:52 UTC 2019 x86_64
x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2017-5754 (Meltdown):          Not affected
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Enhanced IBRS, IBPB

run-level 5 Jul 2 18:28

SPEC is set to: /home/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2        ext4  439G   43G  374G  11%  /
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 146

SPECrate2017\_fp\_peak = 150

PowerEdge MX740 (Intel Xeon Gold 6244, 3.60GHz)

CPU2017 License: 55

Test Date: Jul-2019

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2019

Tested by: Dell Inc.

Software Availability: May-2019

## Platform Notes (Continued)

this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Dell Inc. 2.1.6 03/04/2019

Memory:

9x 00AD00B300AD HMA84GR7CJR4N-WM 32 GB 2 rank 2933  
3x 00AD069D00AD HMA84GR7CJR4N-WM 32 GB 2 rank 2933  
4x Not Specified Not Specified

(End of data from sysinfo program)

## Compiler Version Notes

=====

CC 519.lbm\_r(base) 538.imagick\_r(base, peak) 544.nab\_r(base, peak)

=====

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

=====

CC 519.lbm\_r(peak)

=====

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

=====

CXXC 508.namd\_r(base) 510.parest\_r(base, peak)

=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

=====

CXXC 508.namd\_r(peak)

=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 146

SPECrate2017\_fp\_peak = 150

PowerEdge MX740 (Intel Xeon Gold 6244, 3.60GHz)

CPU2017 License: 55

Test Date: Jul-2019

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2019

Tested by: Dell Inc.

Software Availability: May-2019

## Compiler Version Notes (Continued)

CC 511.povray\_r(base) 526.blender\_r(base, peak)

```
=====
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
```

=====
CC 511.povray\_r(peak)

```
=====
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
```

=====
FC 507.cactubSSN\_r(base, peak)

```
=====
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
```

=====
FC 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak) 554.roms\_r(base)

```
=====
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
```

=====
FC 554.roms\_r(peak)

```
=====
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 146

SPECrate2017\_fp\_peak = 150

PowerEdge MX740 (Intel Xeon Gold 6244, 3.60GHz)

CPU2017 License: 55

Test Date: Jul-2019

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2019

Tested by: Dell Inc.

Software Availability: May-2019

## Compiler Version Notes (Continued)

64, Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

CC 521.wrf\_r(base) 527.cam4\_r(base)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)

64, Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,

Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

CC 521.wrf\_r(peak) 527.cam4\_r(peak)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)

64, Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,

Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

ifort -m64 icc -m64 -std=c11

Benchmarks using both C and C++:

icpc -m64icc -m64 -std=c11

Benchmarks using Fortran, C, and C++:

icpc -m64icc -m64 -std=c11 ifort -m64



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX740 (Intel Xeon Gold 6244, 3.60GHz)

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECrate2017\_fp\_base = 146

SPECrate2017\_fp\_peak = 150

Test Date: Jul-2019

Hardware Availability: Apr-2019

Software Availability: May-2019

## Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs
-align array32byte
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs
-align array32byte
```

Benchmarks using both C and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs
-align array32byte
```



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX740 (Intel Xeon Gold 6244, 3.60GHz)

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECrate2017\_fp\_base = 146

SPECrate2017\_fp\_peak = 150

Test Date: Jul-2019

Hardware Availability: Apr-2019

Software Availability: May-2019

## Peak Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using both C and C++:

```
icpc -m64icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
icpc -m64icc -m64 -std=c11 ifort -m64
```

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
519.lbm_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4
```

```
538.imagick_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4
```

544.nab\_r: Same as 538.imagick\_r

C++ benchmarks:

```
508.namd_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 146

PowerEdge MX740 (Intel Xeon Gold 6244, 3.60GHz)

SPECrate2017\_fp\_peak = 150

CPU2017 License: 55

Test Date: Jul-2019

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2019

Tested by: Dell Inc.

Software Availability: May-2019

## Peak Optimization Flags (Continued)

510.parest\_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4

Fortran benchmarks:

503.bwaves\_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -auto  
-nostandard-realloc-lhs -align array32byte

549.fotonik3d\_r: Same as 503.bwaves\_r

554.roms\_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs  
-align array32byte

Benchmarks using both Fortran and C:

-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs  
-align array32byte

Benchmarks using both C and C++:

511.povray\_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4

526.blender\_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4

Benchmarks using Fortran, C, and C++:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs  
-align array32byte

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.html>  
<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revE3.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.xml>  
<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revE3.xml>



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX740 (Intel Xeon Gold 6244, 3.60GHz)

SPECrate2017\_fp\_base = 146

SPECrate2017\_fp\_peak = 150

CPU2017 License: 55

Test Date: Jul-2019

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2019

Tested by: Dell Inc.

Software Availability: May-2019

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.5 on 2019-07-02 20:46:11-0400.

Report generated on 2019-08-06 17:58:32 by CPU2017 PDF formatter v6067.

Originally published on 2019-08-06.