



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate®2017\_int\_base = 192

ThinkSystem ST550  
(1.90 GHz, Intel Xeon Gold 5220T)

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9017


Test Date: Sep-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jul-2019

Tested by: Lenovo Global Technology

Software Availability: May-2019

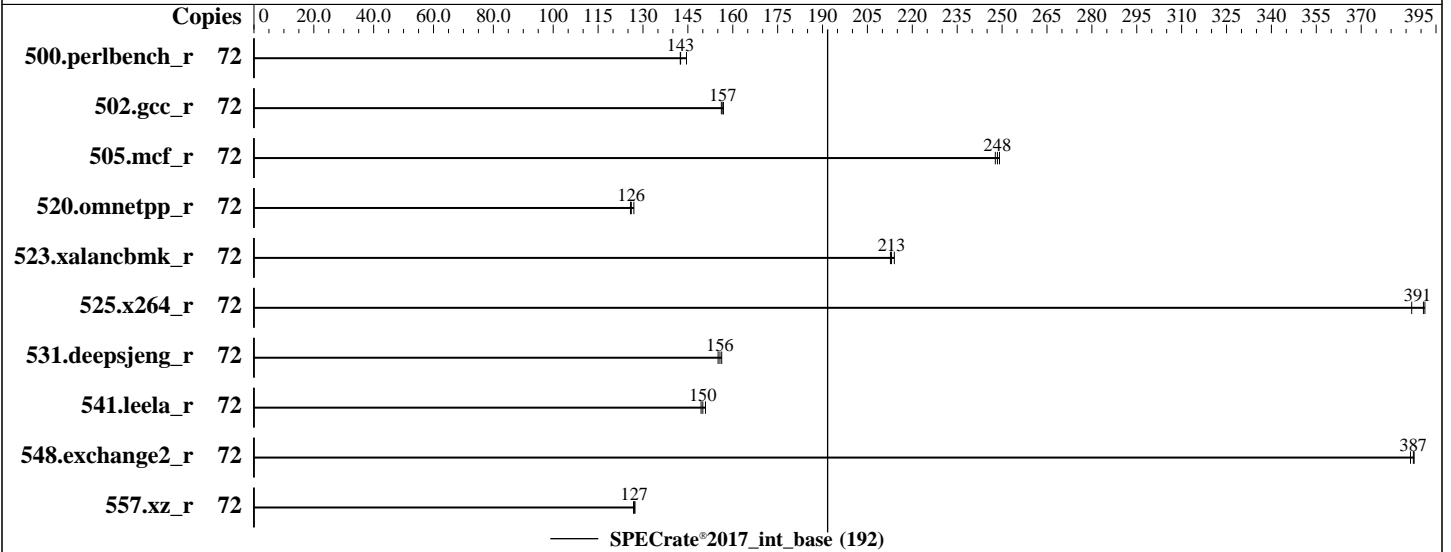

### Hardware

CPU Name: Intel Xeon Gold 5220T  
 Max MHz: 3900  
 Nominal: 1900  
 Enabled: 36 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 24.75 MB I+D on chip per chip  
 Other: None  
 Memory: 192 GB (12 x 16 GB 2Rx8 PC4-2933Y-R, running at 2666)  
 Storage: 1 x 480 GB SATA SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 12 SP4 (x86\_64)  
 Kernel 4.12.14-94.41-default  
 Compiler: C/C++: Version 19.0.4.227 of Intel C/C++  
 Compiler for Linux;  
 Fortran: Version 19.0.4.227 of Intel Fortran  
 Compiler for Linux  
 Parallel: No  
 Firmware: Lenovo BIOS Version O0E142D 2.30 released Aug-2019 tested as O0E141D 2.30 Jul-2019  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: None  
 Power Management: --



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem ST550  
(1.90 GHz, Intel Xeon Gold 5220T)

SPECrate®2017\_int\_base = 192

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9017  
Test Sponsor: Lenovo Global Technology  
Tested by: Lenovo Global Technology

Test Date: Sep-2019  
Hardware Availability: Jul-2019  
Software Availability: May-2019

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	72	<b>804</b>	<b>143</b>	805	142	793	145							
502.gcc_r	72	650	157	<b>651</b>	<b>157</b>	653	156							
505.mcf_r	72	<b>468</b>	<b>248</b>	470	248	467	249							
520.omnetpp_r	72	751	126	<b>749</b>	<b>126</b>	744	127							
523.xalancbmk_r	72	<b>357</b>	<b>213</b>	355	214	357	213							
525.x264_r	72	322	391	<b>323</b>	<b>391</b>	326	387							
531.deepsjeng_r	72	<b>530</b>	<b>156</b>	528	156	532	155							
541.leela_r	72	790	151	<b>795</b>	<b>150</b>	798	149							
548.exchange2_r	72	488	386	<b>487</b>	<b>387</b>	487	388							
557.xz_r	72	611	127	<b>612</b>	<b>127</b>	613	127							

SPECrate®2017\_int\_base = 192

SPECrate®2017\_int\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:

LD\_LIBRARY\_PATH = "/home/cpu2017-1.0.5-ic19.0u4/lib/intel64"

Binaries compiled on a system with 1x Intel Core i9-799X CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.5

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

runcpu command invoked through numactl i.e.:

```
numactl --interleave=all runcpu <etc>
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate®2017\_int\_base = 192

ThinkSystem ST550  
(1.90 GHz, Intel Xeon Gold 5220T)

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Sep-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jul-2019

Tested by: Lenovo Global Technology

Software Availability: May-2019

### General Notes (Continued)

is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2018-3640 (Spectre variant 3a) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2018-3639 (Spectre variant 4) is mitigated in the system as tested and documented.

### Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance

Choose Operating Mode set to Custom Mode

Patrol Scrub set to Disable

SNC set to Enable

Sysinfo program /home/cpu2017-1.0.5-ic19.0u4/bin/sysinfo

Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9

running on linux-0x76 Thu Sep 19 01:46:16 2019

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Gold 5220T CPU @ 1.90GHz

2 "physical id"s (chips)

72 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 18

siblings : 36

physical 0: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27

physical 1: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27

From lscpu:

Architecture: x86\_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 72

On-line CPU(s) list: 0-71

Thread(s) per core: 2

Core(s) per socket: 18

Socket(s): 2

NUMA node(s): 4

Vendor ID: GenuineIntel

CPU family: 6

Model: 85

Model name: Intel(R) Xeon(R) Gold 5220T CPU @ 1.90GHz

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate®2017\_int\_base = 192

ThinkSystem ST550  
(1.90 GHz, Intel Xeon Gold 5220T)

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Sep-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jul-2019

Tested by: Lenovo Global Technology

Software Availability: May-2019

### Platform Notes (Continued)

```
Stepping: 7
CPU MHz: 1900.000
CPU max MHz: 3900.0000
CPU min MHz: 800.0000
BogoMIPS: 3800.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 25344K
NUMA node0 CPU(s): 0-2,5,6,9,10,14,15,36-38,41,42,45,46,50,51
NUMA node1 CPU(s): 3,4,7,8,11-13,16,17,39,40,43,44,47-49,52,53
NUMA node2 CPU(s): 18-20,23,24,27,28,32,33,54-56,59,60,63,64,68,69
NUMA node3 CPU(s): 21,22,25,26,29-31,34,35,57,58,61,62,65-67,70,71
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm
pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c
rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3 invpcid_single ssbd
mba ibrs ibpb stibp tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bml
hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f avx512dq rdseed adx smap
clflushopt clwb intel_pt avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves
cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local dtherm ida arat pln pts pku ospke
avx512_vnni flush_l1d arch_capabilities
```

```
/proc/cpuinfo cache data
cache size : 25344 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 4 nodes (0-3)
node 0 cpus: 0 1 2 5 6 9 10 14 15 36 37 38 41 42 45 46 50 51
node 0 size: 47981 MB
node 0 free: 47652 MB
node 1 cpus: 3 4 7 8 11 12 13 16 17 39 40 43 44 47 48 49 52 53
node 1 size: 48341 MB
node 1 free: 48089 MB
node 2 cpus: 18 19 20 23 24 27 28 32 33 54 55 56 59 60 63 64 68 69
node 2 size: 48370 MB
node 2 free: 48102 MB
node 3 cpus: 21 22 25 26 29 30 31 34 35 57 58 61 62 65 66 67 70 71
node 3 size: 48367 MB
node 3 free: 47907 MB
node distances:
node 0 1 2 3
0: 10 11 21 21
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem ST550  
(1.90 GHz, Intel Xeon Gold 5220T)

SPECrate®2017\_int\_base = 192

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Sep-2019  
**Hardware Availability:** Jul-2019  
**Software Availability:** May-2019

### Platform Notes (Continued)

```
1: 11 10 21 21
2: 21 21 10 11
3: 21 21 11 10
```

From /proc/meminfo

```
MemTotal:      197694364 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

From /etc/\*release\* /etc/\*version\*

SuSE-release:

```
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 4
```

```
# This file is deprecated and will be removed in a future service pack or release.
# Please check /etc/os-release for details about this release.
```

os-release:

```
NAME="SLES"
VERSION="12-SP4"
VERSION_ID="12.4"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP4"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp4"
```

uname -a:

```
Linux linux-0x76 4.12.14-94.41-default #1 SMP Wed Oct 31 12:25:04 UTC 2018 (3090901)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2017-5754 (Meltdown):      Not affected
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Indirect Branch Restricted Speculation,
IBPB, IBRS_FW
```

run-level 3 Sep 19 01:42

SPEC is set to: /home/cpu2017-1.0.5-ic19.0u4

```
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/sdb3       xfs       445G   41G  404G  10% /
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Lenovo -[00E141D-2.30]- 07/03/2019

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

ThinkSystem ST550  
(1.90 GHz, Intel Xeon Gold 5220T)

SPECrate®2017\_int\_base = 192

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Sep-2019  
**Hardware Availability:** Jul-2019  
**Software Availability:** May-2019

## Platform Notes (Continued)

Memory:

12x SK Hynix HMA82GR7CJR8N-WM 16 GB 2 rank 2933, configured at 2666

(End of data from sysinfo program)

## Compiler Version Notes

```
=====  
C      | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base)  
      | 525.x264_r(base) 557.xz_r(base)  
=====
```

```
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
=====
```

```
=====  
C++   | 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)  
      | 541.leela_r(base)  
=====
```

```
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
=====
```

```
=====  
Fortran | 548.exchange2_r(base)  
=====
```

```
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
=====
```

## Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2017\_int\_base = 192

ThinkSystem ST550  
(1.90 GHz, Intel Xeon Gold 5220T)

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Sep-2019

Hardware Availability: Jul-2019

Software Availability: May-2019

## Base Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502 gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Base Optimization Flags

### C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc
```

### C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc
```

### Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.html>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-CLX-F.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.xml>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-CLX-F.xml>



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem ST550  
(1.90 GHz, Intel Xeon Gold 5220T)

SPECrate®2017\_int\_base = 192

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Sep-2019

**Hardware Availability:** Jul-2019

**Software Availability:** May-2019

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.0.5 on 2019-09-18 13:46:15-0400.

Report generated on 2019-10-15 14:38:43 by CPU2017 PDF formatter v6255.

Originally published on 2019-10-15.