



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SN850  
(3.30 GHz, Intel Xeon Gold 6234)

SPECrate®2017\_int\_base = 247

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Oct-2019

Hardware Availability: Jul-2019

Software Availability: May-2019

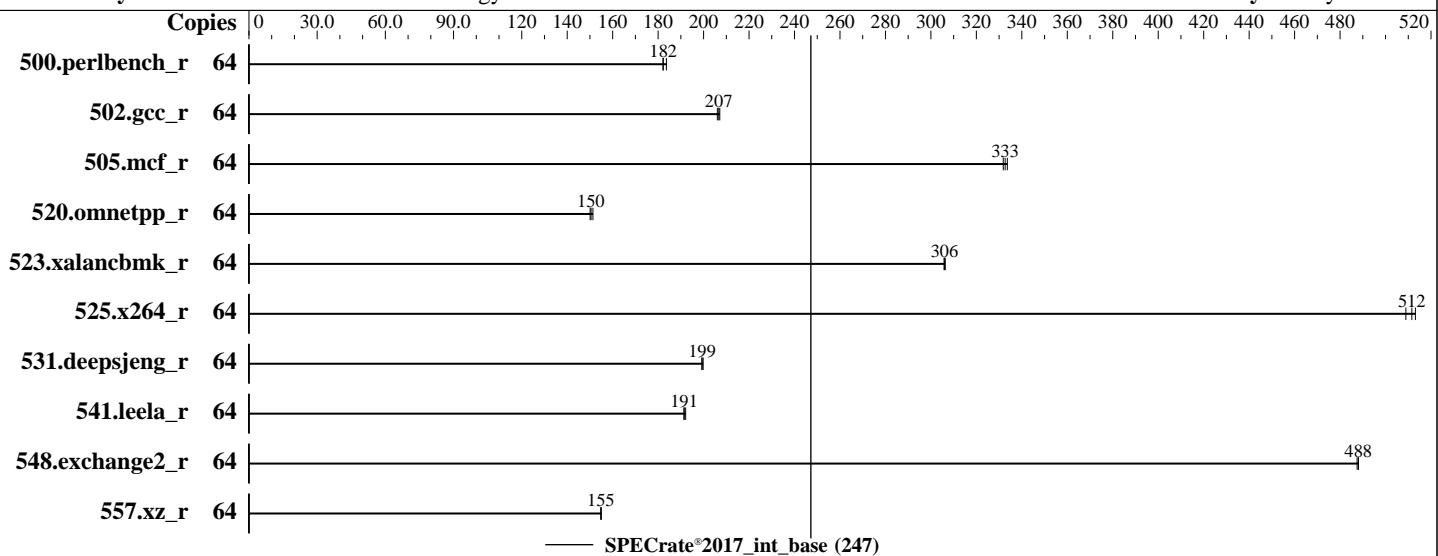

### Hardware

CPU Name: Intel Xeon Gold 6234  
Max MHz: 4000  
Nominal: 3300  
Enabled: 32 cores, 4 chips, 2 threads/core  
Orderable: 2,4 chips  
Cache L1: 32 KB I + 32 KB D on chip per core  
L2: 1 MB I+D on chip per core  
L3: 24.75 MB I+D on chip per chip  
Other: None  
Memory: 768 GB (48 x 16 GB 2Rx8 PC4-2933Y-R)  
Storage: 800 GB tmpfs  
Other: None

### OS:

SUSE Linux Enterprise Server 12 SP4 (x86\_64)  
Kernel 4.12.14-94.41-default

### Compiler:

C/C++: Version 19.0.4.227 of Intel

C/C++

Compiler for Linux;

Fortran: Version 19.0.4.227 of

Intel Fortran

Compiler for Linux

No

### Parallel:

Lenovo BIOS Version IVE142E 2.30 released Aug-2019  
tested as IVE141E 2.30 Jul-2019

### Firmware:

tmpfs

### File System:

Run level 3 (multi-user)

### System State:

64-bit

### Base Pointers:

Not Applicable

### Peak Pointers:

None

### Other:

### Power Management:

### Software



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SN850  
(3.30 GHz, Intel Xeon Gold 6234)

SPECrate®2017\_int\_base = 247

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Oct-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jul-2019

Tested by: Lenovo Global Technology

Software Availability: May-2019

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	64	<b>559</b>	<b>182</b>	559	182	555	184							
502.gcc_r	64	<b>438</b>	<b>207</b>	438	207	440	206							
505.mcf_r	64	<b>311</b>	<b>333</b>	310	334	312	332							
520.omnetpp_r	64	<b>558</b>	<b>150</b>	559	150	555	151							
523.xalancbmk_r	64	221	306	221	306	<b>221</b>	<b>306</b>							
525.x264_r	64	218	513	220	509	<b>219</b>	<b>512</b>							
531.deepsjeng_r	64	<b>368</b>	<b>199</b>	367	200	368	199							
541.leela_r	64	<b>553</b>	<b>191</b>	552	192	554	191							
548.exchange2_r	64	344	487	<b>344</b>	<b>488</b>	344	488							
557.xz_r	64	<b>446</b>	<b>155</b>	446	155	446	155							

SPECrate®2017\_int\_base = 247

SPECrate®2017\_int\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Tmpfs filesystem can be set with:

```
mount -t tmpfs -o size=800g tmpfs /home
```

Process tuning setting:

```
echo 50000 > /proc/sys/kernel/sched_cfs_bandwidth_slice_us
echo 240000000 > /proc/sys/kernel/sched_latency_ns
echo 5000000 > /proc/sys/kernel/sched_migration_cost_ns
echo 100000000 > /proc/sys/kernel/sched_min_granularity_ns
echo 150000000 > /proc/sys/kernel/sched_wakeup_granularity_ns
echo 0 > /proc/sys/kernel/numa_balancing
```

## General Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2017-1.0.5-ic19.0u4/lib/intel64"

Binaries compiled on a system with 1x Intel Core i9-799X CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.5  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SN850  
(3.30 GHz, Intel Xeon Gold 6234)

SPECrate®2017\_int\_base = 247

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Oct-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jul-2019

Tested by: Lenovo Global Technology

Software Availability: May-2019

## General Notes (Continued)

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2018-3640 (Spectre variant 3a) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2018-3639 (Spectre variant 4) is mitigated in the system as tested and documented.

## Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance

Trusted Execution Technology set to Enable

SNC set to Enable

```
Sysinfo program /home/cpu2017-1.0.5-ic19.0u4/bin/sysinfo
Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9
running on linux-uwth Tue Oct 15 18:42:09 2019
```

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Gold 6234 CPU @ 3.30GHz
        4 "physical id"s (chips)
        64 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 8
siblings    : 16
physical 0: cores 2 9 17 19 24 26 27
physical 1: cores 2 3 4 9 11 24 25 27
physical 2: cores 2 3 9 11 17 20 24 27
physical 3: cores 2 3 16 18 20 24 25 27
```

From lscpu:

```
Architecture:          x86_64
CPU op-mode(s):       32-bit, 64-bit
Byte Order:           Little Endian
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SN850  
(3.30 GHz, Intel Xeon Gold 6234)

SPECrate®2017\_int\_base = 247

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Oct-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jul-2019

Tested by: Lenovo Global Technology

Software Availability: May-2019

## Platform Notes (Continued)

```

CPU(s): 64
On-line CPU(s) list: 0-63
Thread(s) per core: 2
Core(s) per socket: 8
Socket(s): 4
NUMA node(s): 8
Vendor ID: GenuineIntel
CPU family: 6
Model: 85
Model name: Intel(R) Xeon(R) Gold 6234 CPU @ 3.30GHz
Stepping: 7
CPU MHz: 3300.000
CPU max MHz: 4000.0000
CPU min MHz: 1200.0000
BogoMIPS: 6600.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 25344K
NUMA node0 CPU(s): 0,2,3,5,32,34,35,37
NUMA node1 CPU(s): 1,4,6,7,33,36,38,39
NUMA node2 CPU(s): 8,11,13,14,40,43,45,46
NUMA node3 CPU(s): 9,10,12,15,41,42,44,47
NUMA node4 CPU(s): 16,18,20,22,48,50,52,54
NUMA node5 CPU(s): 17,19,21,23,49,51,53,55
NUMA node6 CPU(s): 24,26,29,30,56,58,61,62
NUMA node7 CPU(s): 25,27,28,31,57,59,60,63
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtTopology nonstop_tsc cpuid
aperfmpf perf_pni pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm
pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c
rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_13 cdp_13 invpcid_single
intel_ppin ssbd mba ibrs ibpb stibp tpr_shadow vnmi flexpriority ept vpid fsgsbase
tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f avx512dq
rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl xsaveopt xsavec
xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local dtherm ida arat pln
pts pku ospke avx512_vnni flush_l1d arch_capabilities

```

```
/proc/cpuinfo cache data
cache size : 25344 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 8 nodes (0-7)
node 0 cpus: 0 2 3 5 32 34 35 37
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SN850  
(3.30 GHz, Intel Xeon Gold 6234)

SPECrate®2017\_int\_base = 247

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Oct-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jul-2019

Tested by: Lenovo Global Technology

Software Availability: May-2019

## Platform Notes (Continued)

```
node 0 size: 96369 MB
node 0 free: 94926 MB
node 1 cpus: 1 4 6 7 33 36 38 39
node 1 size: 96761 MB
node 1 free: 90702 MB
node 2 cpus: 8 11 13 14 40 43 45 46
node 2 size: 96761 MB
node 2 free: 90999 MB
node 3 cpus: 9 10 12 15 41 42 44 47
node 3 size: 96761 MB
node 3 free: 96475 MB
node 4 cpus: 16 18 20 22 48 50 52 54
node 4 size: 96761 MB
node 4 free: 96621 MB
node 5 cpus: 17 19 21 23 49 51 53 55
node 5 size: 96732 MB
node 5 free: 96582 MB
node 6 cpus: 24 26 29 30 56 58 61 62
node 6 size: 96761 MB
node 6 free: 96622 MB
node 7 cpus: 25 27 28 31 57 59 60 63
node 7 size: 96758 MB
node 7 free: 96611 MB
node distances:
node 0 1 2 3 4 5 6 7
 0: 10 11 21 21 21 21 21 21
 1: 11 10 21 21 21 21 21 21
 2: 21 21 10 11 21 21 21 21
 3: 21 21 11 10 21 21 21 21
 4: 21 21 21 21 10 11 21 21
 5: 21 21 21 21 11 10 21 21
 6: 21 21 21 21 21 21 10 11
 7: 21 21 21 21 21 21 11 10
```

```
From /proc/meminfo
MemTotal: 792234328 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

```
From /etc/*release* /etc/*version*
SuSE-release:
  SUSE Linux Enterprise Server 12 (x86_64)
  VERSION = 12
  PATCHLEVEL = 4
  # This file is deprecated and will be removed in a future service pack or release.
  # Please check /etc/os-release for details about this release.
os-release:
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SN850  
(3.30 GHz, Intel Xeon Gold 6234)

SPECrate®2017\_int\_base = 247

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Oct-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jul-2019

Tested by: Lenovo Global Technology

Software Availability: May-2019

## Platform Notes (Continued)

```
NAME= "SLES"
VERSION= "12-SP4"
VERSION_ID= "12.4"
PRETTY_NAME= "SUSE Linux Enterprise Server 12 SP4"
ID= "sles"
ANSI_COLOR= "0;32"
CPE_NAME= "cpe:/o:suse:sles:12:sp4"
```

```
uname -a:
Linux linux-uwth 4.12.14-94.41-default #1 SMP Wed Oct 31 12:25:04 UTC 2018 (3090901)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2017-5754 (Meltdown): Not affected
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Indirect Branch Restricted Speculation,
IBPB, IBRS_FW
```

run-level 3 Oct 15 18:38

```
SPEC is set to: /home/cpu2017-1.0.5-ic19.0u4
Filesystem      Type   Size  Used Avail Use% Mounted on
tmpfs          tmpfs  800G  8.3G  792G   2% /home
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Lenovo -[IVE141E-2.30]- 07/02/2019

Memory:

48x Samsung M393A2K43CB2-CVF 16 GB 2 rank 2933

(End of data from sysinfo program)

## Compiler Version Notes

```
=====
C      | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base)
      | 525.x264_r(base) 557.xz_r(base)
=====
```

```
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
=====
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SN850  
(3.30 GHz, Intel Xeon Gold 6234)

SPECrate®2017\_int\_base = 247

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Oct-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jul-2019

Tested by: Lenovo Global Technology

Software Availability: May-2019

## Compiler Version Notes (Continued)

=====  
C++ | 520.omnetpp\_r(base) 523.xalancbmk\_r(base) 531.deepsjeng\_r(base)  
541.leela\_r(base)

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
-----

=====  
Fortran | 548.exchange2\_r(base)  
-----

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
-----

## Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
502.gcc\_r: -DSPEC\_LP64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SN850  
(3.30 GHz, Intel Xeon Gold 6234)

SPECrate®2017\_int\_base = 247

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Oct-2019

Hardware Availability: Jul-2019

Software Availability: May-2019

## Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.html>  
<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-CLX-F.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.xml>  
<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-CLX-F.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.0.5 on 2019-10-15 06:42:08-0400.

Report generated on 2019-10-29 16:14:32 by CPU2017 PDF formatter v6255.

Originally published on 2019-10-29.