



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS520A-E12(K14PA-U24) Server System  
2.40 GHz, AMD EPYC 9654

SPECrate®2017\_int\_base = 898

SPECrate®2017\_int\_peak = 968

CPU2017 License: 9016


Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Oct-2022

Hardware Availability: Nov-2022

Software Availability: Nov-2022

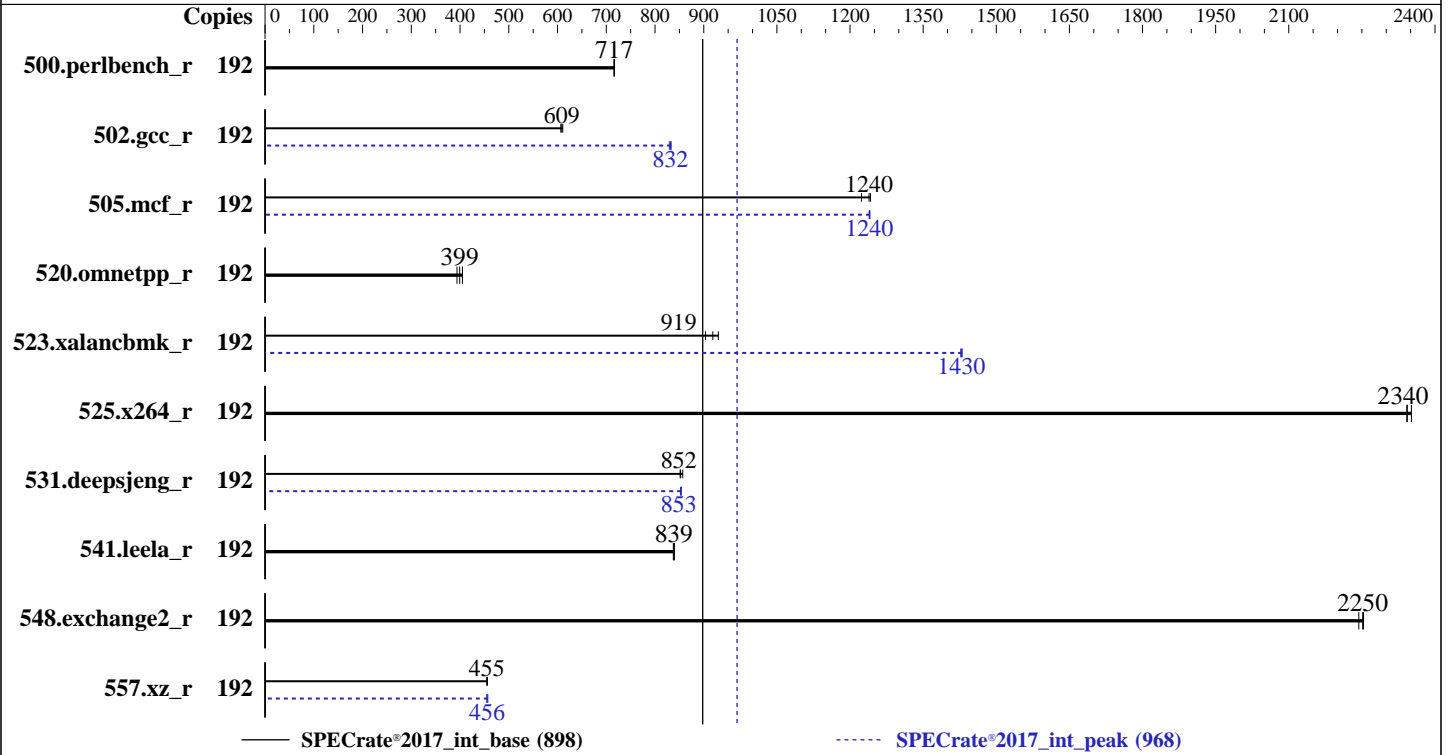

### Hardware

CPU Name: AMD EPYC 9654  
 Max MHz: 3700  
 Nominal: 2400  
 Enabled: 96 cores, 1 chip, 2 threads/core  
 Orderable: 1 chip  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 384 MB I+D on chip per chip,  
 32 MB shared / 8 cores  
 Other: None  
 Memory: 768 GB (12 x 64 GB 2Rx4 PC5-4800B-R)  
 Storage: 1 x 3.84 TB PCIE NVME SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP4 (x86\_64)  
 Kernel 5.14.21-150400.22-default  
 Compiler: C/C++/Fortran: Version 4.0.0 of AOCC  
 Parallel: No  
 Firmware: Version 0401 released Oct-2022  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: None  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS520A-E12(K14PA-U24) Server System  
2.40 GHz, AMD EPYC 9654

SPECrate®2017\_int\_base = 898

SPECrate®2017\_int\_peak = 968

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Oct-2022

Hardware Availability: Nov-2022

Software Availability: Nov-2022

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	192	<b>427</b>	<b>717</b>	427	717	427	716	192	<b>427</b>	<b>717</b>	427	717	427	716
502.gcc_r	192	448	607	<b>447</b>	<b>609</b>	445	611	192	328	829	<b>327</b>	<b>832</b>	326	833
505.mcf_r	192	254	1220	250	1240	<b>250</b>	<b>1240</b>	192	<b>250</b>	<b>1240</b>	250	1240	250	1240
520.omnetpp_r	192	622	405	<b>631</b>	<b>399</b>	640	394	192	622	405	<b>631</b>	<b>399</b>	640	394
523.xalancbmk_r	192	218	930	<b>221</b>	<b>919</b>	224	904	192	142	1430	<b>142</b>	<b>1430</b>	142	1430
525.x264_r	192	143	2350	144	2340	<b>143</b>	<b>2340</b>	192	143	2350	144	2340	<b>143</b>	<b>2340</b>
531.deepsjeng_r	192	257	857	<b>258</b>	<b>852</b>	258	851	192	258	854	258	852	<b>258</b>	<b>853</b>
541.leela_r	192	<b>379</b>	<b>839</b>	379	840	380	838	192	<b>379</b>	<b>839</b>	379	840	380	838
548.exchange2_r	192	<b>223</b>	<b>2250</b>	224	2240	223	2250	192	<b>223</b>	<b>2250</b>	224	2240	223	2250
557.xz_r	192	<b>456</b>	<b>455</b>	455	456	456	455	192	<b>455</b>	<b>456</b>	456	455	454	457

SPECrate®2017\_int\_base = **898**

SPECrate®2017\_int\_peak = **968**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit  
OS set to performance mode via cpupower frequency-set -g performance  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>  
To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run  
variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

ASUS RS520A-E12(K14PA-U24) Server System  
2.40 GHz, AMD EPYC 9654

SPECrate®2017\_int\_base = 898

SPECrate®2017\_int\_peak = 968

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Oct-2022

**Hardware Availability:** Nov-2022

**Software Availability:** Nov-2022

## Operating System Notes (Continued)

To enable Transparent Hugepages (THP) for all allocations,  
'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =  
    "/spec2017/amd_rate_aocc400_genoa_B_lib/lib:/spec2017/amd_rate_aocc400_g  
    enoa_B_lib/lib32:"  
MALLOC_CONF = "retain:true"
```

Environment variables set by runcpu during the 523.xalancbmk\_r peak run:

```
MALLOC_CONF = "thp:never"
```

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS Configuration:  
SR-IOV Support = Disabled  
SVM Mode = Disabled  
NUMA nodes per socket = NPS4  
Determinism Control = Manual  
Determinism Enable = Power  
Engine Boost = Aggressive  
TDP Control = Manual  
TDP = 400  
PPT Control = Manual  
PPT = 400  
BMC Configuration:  
Fan mode = Full speed mode

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS520A-E12(K14PA-U24) Server System  
2.40 GHz, AMD EPYC 9654

SPECrate®2017\_int\_base = 898

SPECrate®2017\_int\_peak = 968

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Oct-2022

Hardware Availability: Nov-2022

Software Availability: Nov-2022

### Platform Notes (Continued)

sysinfo program /spec2017/bin/sysinfo  
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d  
running on localhost Tue Oct 11 15:59:28 2022

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : AMD EPYC 9654 96-Core Processor
 1 "physical id"s (chips)
192 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 96
siblings : 192
physical 0: cores 0 1 2 3 4 5 6 7 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25
26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53
54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81
82 83 84 85 86 87 88 89 90 91 92 93 94 95
```

From lscpu from util-linux 2.37.2:

```
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Address sizes: 52 bits physical, 57 bits virtual
Byte Order: Little Endian
CPU(s): 192
On-line CPU(s) list: 0-191
Vendor ID: AuthenticAMD
Model name: AMD EPYC 9654 96-Core Processor
CPU family: 25
Model: 17
Thread(s) per core: 2
Core(s) per socket: 96
Socket(s): 1
Stepping: 1
Frequency boost: enabled
CPU max MHz: 3707.8120
CPU min MHz: 1500.0000
BogoMIPS: 4848.19
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr
pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt
pdpe1gb rdtscp lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid
aperfmpperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe
popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a
misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb
bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3 invpcid_single hw_pstate ssbd mba ibrs
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS520A-E12(K14PA-U24) Server System  
2.40 GHz, AMD EPYC 9654

SPECrate®2017\_int\_base = 898

SPECrate®2017\_int\_peak = 968

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Oct-2022

Hardware Availability: Nov-2022

Software Availability: Nov-2022

### Platform Notes (Continued)

```

ibpb stibp vmmcall fsgsbase bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f
avx512dq rdseed adx smap avx512ifma clflushopt clwb avx512cd sha_ni avx512bw
avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin arat npt
lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
pfthreshold avic v_vmsave_vmload vgif v_spec_ctrl avx512vbmi umip pku ospke
avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq la57
rdpid overflow_recov succor smca fsrm flush_lli

```

Virtualization:

AMD-V

L1d cache:

3 MiB (96 instances)

L1i cache:

3 MiB (96 instances)

L2 cache:

96 MiB (96 instances)

L3 cache:

384 MiB (12 instances)

NUMA node(s):

4

NUMA node0 CPU(s):

0-23,96-119

NUMA node1 CPU(s):

24-47,120-143

NUMA node2 CPU(s):

48-71,144-167

NUMA node3 CPU(s):

72-95,168-191

Vulnerability Itlb multihit:

Not affected

Vulnerability L1tf:

Not affected

Vulnerability Mds:

Not affected

Vulnerability Meltdown:

Not affected

Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp

Vulnerability Spectre v1: pointer sanitization

Mitigation; usercopy/swaggs barriers and \_\_user

Vulnerability Spectre v2:

Mitigation; Retpolines, IBPB conditional, IBRS\_FW,

STIBP always-on, RSB filling

Vulnerability Srbds:

Not affected

Vulnerability Tsx async abort:

Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	3M	8	Data	1	64	1	64
L1i	32K	3M	8	Instruction	1	64	1	64
L2	1M	96M	8	Unified	2	2048	1	64
L3	32M	384M	16	Unified	3	32768	1	64

/proc/cpuinfo cache data

cache size : 1024 KB

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)

node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 96 97 98 99

100 101 102 103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119

node 0 size: 193272 MB

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS520A-E12(K14PA-U24) Server System  
2.40 GHz, AMD EPYC 9654

SPECrate®2017\_int\_base = 898

SPECrate®2017\_int\_peak = 968

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Oct-2022

**Hardware Availability:** Nov-2022

**Software Availability:** Nov-2022

### Platform Notes (Continued)

```

node 0 free: 191523 MB
node 1 cpus: 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47
120 121 122 123 124 125 126 127 128 129 130 131 132 133 134 135 136 137 138 139 140 141
142 143
node 1 size: 193362 MB
node 1 free: 192767 MB
node 2 cpus: 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71
144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159 160 161 162 163 164 165
166 167
node 2 size: 193519 MB
node 2 free: 192929 MB
node 3 cpus: 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95
168 169 170 171 172 173 174 175 176 177 178 179 180 181 182 183 184 185 186 187 188 189
190 191
node 3 size: 193519 MB
node 3 free: 192989 MB
node distances:
node   0   1   2   3
  0:  10  12  12  12
  1:  12  10  12  12
  2:  12  12  10  12
  3:  12  12  12  10

```

```

From /proc/meminfo
MemTotal:      792243240 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
performance

```

```

From /etc/*release* /etc/*version*
os-release:
NAME="SLES"
VERSION="15-SP4"
VERSION_ID="15.4"
PRETTY_NAME="SUSE Linux Enterprise Server 15 SP4"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15:sp4"

```

```

uname -a:
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18
UTC 2022 (49db222) x86_64 x86_64 x86_64 GNU/Linux

```

Kernel self-reported vulnerability status:

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS520A-E12(K14PA-U24) Server System  
2.40 GHz, AMD EPYC 9654

SPECrate®2017\_int\_base = 898

SPECrate®2017\_int\_peak = 968

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Oct-2022

**Hardware Availability:** Nov-2022

**Software Availability:** Nov-2022

### Platform Notes (Continued)

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swaps barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Retpolines, IBPB: conditional, IBRS_FW, STIBP: always-on, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	Not affected
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

run-level 3 Oct 11 15:55

SPEC is set to: /spec2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/nvme0n1p4	xfss	2.0T	11G	2.0T	1%	/

```

From /sys/devices/virtual/dmi/id
Vendor:          ASUSTeK COMPUTER INC.
Product:         RS520A-E12-RS12U
Product Family: Server
Serial:          265227000405

```

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

```

12x Samsung M321R8GA0BB0-CQKVG 64 GB 2 rank 4800

```

BIOS:

```

BIOS Vendor:     American Megatrends Inc.
BIOS Version:    0401
BIOS Date:       10/04/2022
BIOS Revision:   4.1

```

(End of data from sysinfo program)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS520A-E12(K14PA-U24) Server System  
2.40 GHz, AMD EPYC 9654

SPECrate®2017\_int\_base = 898

SPECrate®2017\_int\_peak = 968

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Oct-2022

**Hardware Availability:** Nov-2022

**Software Availability:** Nov-2022

### Compiler Version Notes

=====  
C | 502.gcc\_r(peak)  
-----

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)  
Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin  
-----

=====  
C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
525.x264\_r(base, peak) 557.xz\_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin  
-----

=====  
C | 502.gcc\_r(peak)  
-----

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)  
Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin  
-----

=====  
C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
525.x264\_r(base, peak) 557.xz\_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin  
-----

=====  
C++ | 523.xalanbmk\_r(peak)  
-----

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)

(Continued on next page)





# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS520A-E12(K14PA-U24) Server System  
2.40 GHz, AMD EPYC 9654

SPECrate®2017\_int\_base = 898

SPECrate®2017\_int\_peak = 968

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Oct-2022

**Hardware Availability:** Nov-2022

**Software Availability:** Nov-2022

### Compiler Version Notes (Continued)

Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

=====  
C++ | 520.omnetpp\_r(base, peak) 523.xalancbmk\_r(base)  
| 531.deepsjeng\_r(base, peak) 541.leela\_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

=====  
C++ | 523.xalancbmk\_r(peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)  
Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

=====  
C++ | 520.omnetpp\_r(base, peak) 523.xalancbmk\_r(base)  
| 531.deepsjeng\_r(base, peak) 541.leela\_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

=====  
Fortran | 548.exchange2\_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

ASUS RS520A-E12(K14PA-U24) Server System  
2.40 GHz, AMD EPYC 9654

SPECrate®2017\_int\_base = 898

SPECrate®2017\_int\_peak = 968

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Oct-2022

**Hardware Availability:** Nov-2022

**Software Availability:** Nov-2022

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Base Portability Flags

```
500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather
-z muldefs -O3 -march=znver4 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lflang
-lamdalloc
```

C++ benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -z muldefs -O3
-march=znver4 -fveclib=AMDLIBM -ffast-math
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt
-fvirtual-function-elimination -fvisibility=hidden -lamdlibm -lflang
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

ASUS RS520A-E12(K14PA-U24) Server System  
2.40 GHz, AMD EPYC 9654

SPECrate®2017\_int\_base = 898

SPECrate®2017\_int\_peak = 968

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Oct-2022

**Hardware Availability:** Nov-2022

**Software Availability:** Nov-2022

## Base Optimization Flags (Continued)

C++ benchmarks (continued):

-lamdalloc-ext

Fortran benchmarks:

-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop  
-Wl,-mllvm -Wl,-enable-iv-split -z muldefs -O3 -march=znver4  
-fveclib=AMDLIBM -ffast-math -fepilog-vectorization-of-inductions  
-mllvm -optimize-strided-mem-cost -floop-transform  
-mllvm -unroll-aggressive -mllvm -unroll-threshold=500 -lamdlibm  
-lflang -lamdalloc

## Base Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

## Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Peak Portability Flags

500.perlbench\_r: -DSPEC\_LINUX\_X64 -DSPEC\_LP64

502.gcc\_r: -D\_FILE\_OFFSET\_BITS=64

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

ASUS RS520A-E12(K14PA-U24) Server System  
2.40 GHz, AMD EPYC 9654

SPECrate®2017\_int\_base = 898

SPECrate®2017\_int\_peak = 968

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Oct-2022

**Hardware Availability:** Nov-2022

**Software Availability:** Nov-2022

## Peak Portability Flags (Continued)

```
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Peak Optimization Flags

C benchmarks:

500.perlbench\_r: basepeak = yes

```
502.gcc_r: -m32 -flto -z muldefs -Ofast -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -fgnu89-inline
-lamdalloc
```

```
505.mcf_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lflang -lamdalloc
```

525.x264\_r: basepeak = yes

557.xz\_r: Same as 505.mcf\_r

C++ benchmarks:

520.omnetpp\_r: basepeak = yes

```
523.xalancbmk_r: -m32 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=aggressive
-fno-loop-reroll -Ofast -march=znver4 -fveclib=AMDLIBM
-ffast-math -finline-aggressive
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

ASUS RS520A-E12(K14PA-U24) Server System  
2.40 GHz, AMD EPYC 9654

SPECrate®2017\_int\_base = 898

SPECrate®2017\_int\_peak = 968

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Oct-2022

**Hardware Availability:** Nov-2022

**Software Availability:** Nov-2022

## Peak Optimization Flags (Continued)

523.xalancbmk\_r (continued):

```
-mllvm -unroll-threshold=100  
-mllvm -reduce-array-computations=3 -zopt  
-mllvm -do-block-reorder=aggressive  
-fvirtual-function-elimination -fvisibility=hidden  
-lamdalloc-ext
```

```
531.deepsjeng_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3  
-march=znver4 -fveclib=AMDLIBM -ffast-math  
-mllvm -unroll-threshold=100 -finline-aggressive  
-mllvm -loop-unswitch-threshold=200000  
-mllvm -reduce-array-computations=3 -zopt  
-fvirtual-function-elimination -fvisibility=hidden  
-lamdlibm -lamdalloc-ext
```

541.leela\_r: basepeak = yes

Fortran benchmarks:

548.exchange2\_r: basepeak = yes

## Peak Other Flags

C benchmarks (except as noted below):

```
-Wno-unused-command-line-argument
```

502.gcc\_r: -L/usr/lib32 -Wno-unused-command-line-argument

```
-L/home/work/cpu2017/v118/aocc4/b1/rate/amd_rate_aocc400_genoa_B_lib/lib32
```

C++ benchmarks (except as noted below):

```
-Wno-unused-command-line-argument
```

523.xalancbmk\_r: -L/usr/lib32 -Wno-unused-command-line-argument

```
-L/home/work/cpu2017/v118/aocc4/b1/rate/amd_rate_aocc400_genoa_B_lib/lib32
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-AMD-K14-V1.0.html>

<http://www.spec.org/cpu2017/flags/aocc400-flags.html>



# SPEC CPU<sup>®</sup>2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

ASUS RS520A-E12(K14PA-U24) Server System  
2.40 GHz, AMD EPYC 9654

SPECrate<sup>®</sup>2017\_int\_base = 898

SPECrate<sup>®</sup>2017\_int\_peak = 968

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Oct-2022

**Hardware Availability:** Nov-2022

**Software Availability:** Nov-2022

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-AMD-K14-V1.0.xml>

<http://www.spec.org/cpu2017/flags/aocc400-flags.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU<sup>®</sup>2017 v1.1.8 on 2022-10-11 03:59:28-0400.

Report generated on 2023-03-03 15:03:21 by CPU2017 PDF formatter v6442.

Originally published on 2022-11-11.