



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720-E10(Z12PP-D32) Server System
(2.60 GHz, Intel Xeon Platinum 8368Q)

SPECrate®2017_int_base = 588

SPECrate®2017_int_peak = 608

CPU2017 License: 9016


Test Date: Oct-2022

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Apr-2022

Tested by: ASUSTeK Computer Inc.

Software Availability: May-2022

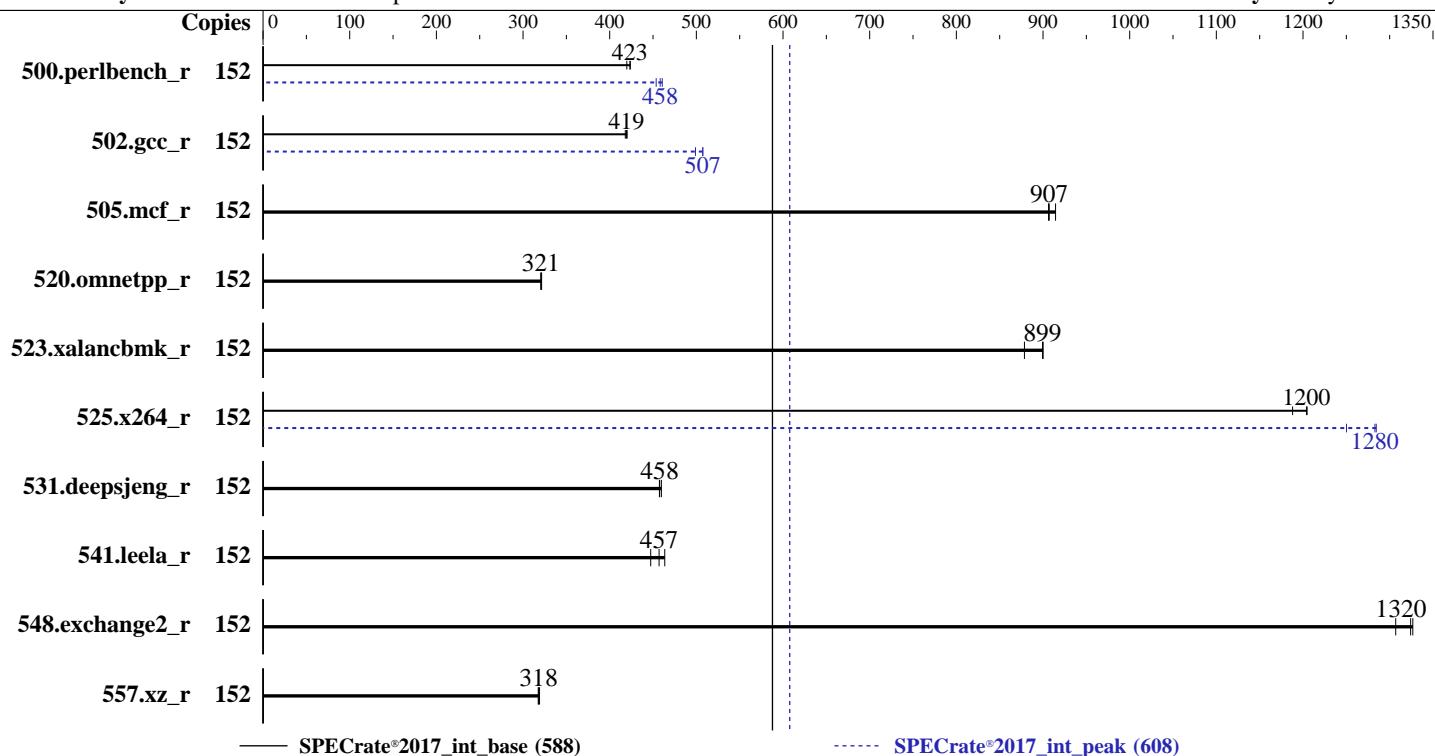

Hardware

CPU Name: Intel Xeon Platinum 8368Q
Max MHz: 3700
Nominal: 2600
Enabled: 76 cores, 2 chips, 2 threads/core
Orderable: 1, 2 chip(s)
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 1.25 MB I+D on chip per core
L3: 57 MB I+D on chip per chip
Other: None
Memory: 1 TB (16 x 64 GB 2Rx4 PC4-3200AA-R)
Storage: 1 x 1 TB SATA SSD
Other: None

Software

OS: Red Hat Enterprise Linux release 8.4 (Ootpa) 4.18.0-305.25.1.el8_4.x86_64
Compiler: C/C++: Version 2022.1 of Intel oneAPI DPC++/C++ Compiler for Linux;
Fortran: Version 2022.1 of Intel Fortran Compiler for Linux;
Parallel: No
Firmware: Version 0802 released Apr-2022
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other: jemalloc memory allocator V5.0.1
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720-E10(Z12PP-D32) Server System
(2.60 GHz, Intel Xeon Platinum 8368Q)

SPECrate®2017_int_base = 588

SPECrate®2017_int_peak = 608

CPU2017 License: 9016

Test Date: Oct-2022

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Apr-2022

Tested by: ASUSTeK Computer Inc.

Software Availability: May-2022

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	152	576	420	572	423	571	424	152	528	458	525	461	533	454		
502.gcc_r	152	512	420	515	418	513	419	152	431	499	424	507	424	507		
505.mcf_r	152	271	906	269	914	271	907	152	271	906	269	914	271	907		
520.omnetpp_r	152	622	321	620	321	622	321	152	622	321	620	321	622	321		
523.xalancbmk_r	152	183	879	178	900	178	899	152	183	879	178	900	178	899		
525.x264_r	152	221	1200	221	1200	224	1190	152	213	1250	207	1280	207	1280		
531.deepsjeng_r	152	381	457	381	458	379	460	152	381	457	381	458	379	460		
541.leela_r	152	563	447	551	457	543	464	152	563	447	551	457	543	464		
548.exchange2_r	152	305	1310	300	1330	301	1320	152	305	1310	300	1330	301	1320		
557.xz_r	152	517	318	516	318	515	319	152	517	318	516	318	515	319		

SPECrate®2017_int_base = 588

SPECrate®2017_int_peak = 608

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

SPEC has ruled that the compiler used for this result was performing a compilation that specifically improves the performance of the 523.xalancbmk_r / 623.xalancbmk_s benchmarks using a priori knowledge of the SPEC code and dataset to perform a transformation that has narrow applicability.

In order to encourage optimizations that have wide applicability (see rule 1.4 https://www.spec.org/cpu2017/Docs/runrules.html#rule_1.4), SPEC will no longer publish results using this optimization.

This result is left in the SPEC results database for historical reference.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
OS set to performance mode via cpupower frequency-set -g performance

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/ic22u1/lib/intel64:/home/ic22u1/lib/ia32:/home/ic22u1/je5.0.1-32"
MALLOC_CONF = "retain:true"



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720-E10(Z12PP-D32) Server System
(2.60 GHz, Intel Xeon Platinum 8368Q)

SPECrate®2017_int_base = 588

SPECrate®2017_int_peak = 608

CPU2017 License: 9016

Test Date: Oct-2022

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Apr-2022

Tested by: ASUSTeK Computer Inc.

Software Availability: May-2022

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3 > /proc/sys/vm/drop_caches

runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Configuration:

VT-d = Disabled

Patrol Scrub = Disabled

Engine Boost = Aggressive

SR-IOV Support = Disabled

BMC Configuration:

Fan mode = Full speed mode

Sysinfo program /home/ic22u1/bin/sysinfo
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d
running on localhost.localdomain Tue Oct 25 09:39:34 2022

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Intel(R) Xeon(R) Platinum 8368Q CPU @ 2.60GHz
2 "physical id"s (chips)
152 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 38
siblings : 76
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31 32 33 34 35 36 37
physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31 32 33 34 35 36 37

From lscpu from util-linux 2.32.1:

Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
CPU(s): 152
On-line CPU(s) list: 0-151
Thread(s) per core: 2
Core(s) per socket: 38
Socket(s): 2

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720-E10(Z12PP-D32) Server System
(2.60 GHz, Intel Xeon Platinum 8368Q)

SPECrate®2017_int_base = 588

SPECrate®2017_int_peak = 608

CPU2017 License: 9016

Test Date: Oct-2022

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Apr-2022

Tested by: ASUSTeK Computer Inc.

Software Availability: May-2022

Platform Notes (Continued)

```
NUMA node(s):          2
Vendor ID:            GenuineIntel
BIOS Vendor ID:      Intel
CPU family:          6
Model:                106
Model name:           Intel(R) Xeon(R) Platinum 8368Q CPU @ 2.60GHz
BIOS Model name:     Intel(R) Xeon(R) Platinum 8368Q CPU @ 2.60GHz
Stepping:              6
CPU MHz:              800.000
CPU max MHz:          3700.0000
CPU min MHz:          800.0000
BogoMIPS:             5200.00
Virtualization:       VT-x
L1d cache:            48K
L1i cache:            32K
L2 cache:              1280K
L3 cache:              58368K
NUMA node0 CPU(s):    0-37,76-113
NUMA node1 CPU(s):    38-75,114-151
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
                       pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                       lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtstopology nonstop_tsc cpuid
                       aperfmpf perf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
                       xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
                       avx f16c rdrand lahf_lm abm 3dnnowprefetch cpuid_fault epb cat_13 invpcid_single
                       intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept
                       vpid ept_ad fsgsbase tsc_adjust bmil hle avx2 smep bni2 erms invpcid cqm rdt_a
                       avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni
                       avx512bw avx512vl xsavopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                       cqm_mbm_local split_lock_detect wbnoinvd dtherm ida arat pln pts hwp hwp_act_window
                       hwp_epp hwp_pkg_req avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
                       avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid fsrm md_clear pconfig
                       flush_lld arch_capabilities
```

```
/proc/cpuinfo cache data
cache size : 58368 KB
```

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27
28 29 30 31 32 33 34 35 36 37 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94
95 96 97 98 99 100 101 102 103 104 105 106 107 108 109 110 111 112 113
node 0 size: 515618 MB
node 0 free: 497504 MB
node 1 cpus: 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62
63 64 65 66 67 68 69 70 71 72 73 74 75 114 115 116 117 118 119 120 121 122 123 124 125
126 127 128 129 130 131 132 133 134 135 136 137 138 139 140 141 142 143 144 145 146 147
148 149 150 151
node 1 size: 516075 MB
node 1 free: 500363 MB
node distances:
node 0 1
 0: 10 20
 1: 20 10
```

```
From /proc/meminfo
MemTotal:        1056454008 kB
HugePages_Total: 0
Hugepagesize:    2048 kB
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720-E10(Z12PP-D32) Server System
(2.60 GHz, Intel Xeon Platinum 8368Q)

SPECrate®2017_int_base = 588

SPECrate®2017_int_peak = 608

CPU2017 License: 9016

Test Date: Oct-2022

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Apr-2022

Tested by: ASUSTeK Computer Inc.

Software Availability: May-2022

Platform Notes (Continued)

```
/sbin/tuned-adm active
  Current active profile: throughput-performance

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
  performance

From /etc/*release* /etc/*version*
os-release:
  NAME="Red Hat Enterprise Linux"
  VERSION="8.4 (Ootpa)"
  ID="rhel"
  ID_LIKE="fedora"
  VERSION_ID="8.4"
  PLATFORM_ID="platform:el8"
  PRETTY_NAME="Red Hat Enterprise Linux 8.4 (Ootpa)"
  ANSI_COLOR="0;31"
redhat-release: Red Hat Enterprise Linux release 8.4 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.4 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.4:ga

uname -a:
Linux localhost.localdomain 4.18.0-305.25.1.el8_4.x86_64 #1 SMP Mon Oct 18 14:34:11
EDT 2021 x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swaps barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	Not affected
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

run-level 3 Oct 25 05:58

SPEC is set to: /home/ic22ul
Filesystem Type Size Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs 878G 148G 731G 17% /home

```
From /sys/devices/virtual/dmi/id
  Vendor:          ASUSTeK COMPUTER INC.
  Product:         RS720-E10-RS12
  Product Family: Server
  Serial:          012345678901
```

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

16x Samsung M393A8G40AB2-CWE 64 GB 2 rank 3200

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720-E10(Z12PP-D32) Server System
(2.60 GHz, Intel Xeon Platinum 8368Q)

SPECrate®2017_int_base = 588

SPECrate®2017_int_peak = 608

CPU2017 License: 9016

Test Date: Oct-2022

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Apr-2022

Tested by: ASUSTeK Computer Inc.

Software Availability: May-2022

Platform Notes (Continued)

BIOS:

BIOS Vendor: American Megatrends Inc.
BIOS Version: 0802
BIOS Date: 04/29/2022
BIOS Revision: 8.2

(End of data from sysinfo program)

Compiler Version Notes

=====

C | 502.gcc_r(peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

=====

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

=====

C | 502.gcc_r(peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

=====

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

=====

C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)
| 541.leela_r(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

=====

Fortran | 548.exchange2_r(base, peak)

=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720-E10(Z12PP-D32) Server System
(2.60 GHz, Intel Xeon Platinum 8368Q)

SPECrate®2017_int_base = 588

SPECrate®2017_int_peak = 608

CPU2017 License: 9016

Test Date: Oct-2022

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Apr-2022

Tested by: ASUSTeK Computer Inc.

Software Availability: May-2022

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64_lin
-lqkmalloc

C++ benchmarks:

-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64_lin
-lqkmalloc

Fortran benchmarks:

-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64_lin
-lqkmalloc



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720-E10(Z12PP-D32) Server System
(2.60 GHz, Intel Xeon Platinum 8368Q)

SPECrate®2017_int_base = 588

SPECrate®2017_int_peak = 608

CPU2017 License: 9016

Test Date: Oct-2022

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Apr-2022

Tested by: ASUSTeK Computer Inc.

Software Availability: May-2022

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Peak Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64

502.gcc_r: -D_FILE_OFFSET_BITS=64

505.mcf_r: -DSPEC_LP64

520.omnetpp_r: -DSPEC_LP64

523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX

525.x264_r: -DSPEC_LP64

531.deepsjeng_r: -DSPEC_LP64

541.leela_r: -DSPEC_LP64

548.exchange2_r: -DSPEC_LP64

557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: -w -std=c11 -m64 -Wl,-z,muldefs

-fprofile-generate(pass 1)

-fprofile-use=default.profdata(pass 2) -xCORE-AVX512

-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops

-qopt-mem-layout-trans=4 -fno-strict-overflow

-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64_lin

-lqkmalloc

502.gcc_r: -m32

-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/ia32_lin

-std=gnu89 -Wl,-z,muldefs -fprofile-generate(pass 1)

-fprofile-use=default.profdata(pass 2) -xCORE-AVX512

-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops

-qopt-mem-layout-trans=4 -L/usr/local/jemalloc32-5.0.1/lib

-ljemalloc

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720-E10(Z12PP-D32) Server System
(2.60 GHz, Intel Xeon Platinum 8368Q)

SPECrate®2017_int_base = 588

SPECrate®2017_int_peak = 608

CPU2017 License: 9016

Test Date: Oct-2022

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Apr-2022

Tested by: ASUSTeK Computer Inc.

Software Availability: May-2022

Peak Optimization Flags (Continued)

505.mcf_r: basepeak = yes

```
525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast
-ffast-math -futo -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-alias
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64_lin
-lqkmalloc
```

557.xz_r: basepeak = yes

C++ benchmarks:

520.omnetpp_r: basepeak = yes

523.xalancbmk_r: basepeak = yes

531.deepsjeng_r: basepeak = yes

541.leela_r: basepeak = yes

Fortran benchmarks:

548.exchange2_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-z12-V1.2.html>

http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.2022-10-12.html

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-z12-V1.2.xml>

http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.2022-10-12.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2022-10-25 09:39:33-0400.

Report generated on 2024-01-29 17:10:33 by CPU2017 PDF formatter v6716.

Originally published on 2022-12-06.