



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

### ProLiant ML110 Gen11


(1.80 GHz, Intel Xeon Gold 6421N)

SPECspeed®2017\_fp\_base = 199

SPECspeed®2017\_fp\_peak = 199

CPU2017 License: 3  
Test Sponsor: HPE  
Tested by: HPE

Test Date: Apr-2023  
Hardware Availability: May-2023  
Software Availability: Dec-2022

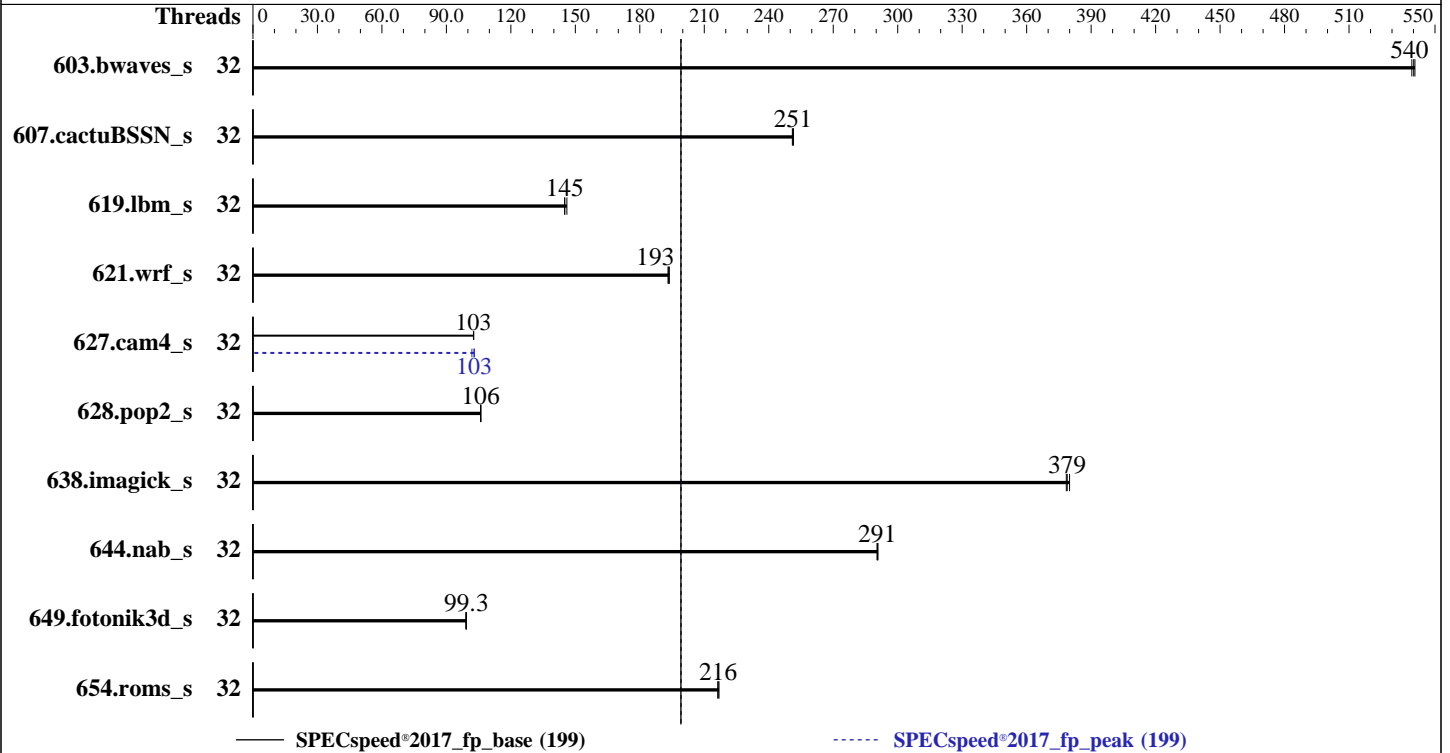

### Hardware

CPU Name: Intel Xeon Gold 6421N  
 Max MHz: 3600  
 Nominal: 1800  
 Enabled: 32 cores, 1 chip  
 Orderable: 1 chip  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 60 MB I+D on chip per chip  
 Other: None  
 Memory: 256 GB (8 x 32 GB 2Rx8 PC5-4800B-R, running at 4400)  
 Storage: 1 x 240 GB SATA SSD  
 Other: None

### Software

OS: Red Hat Enterprise Linux 9.0 release (Plow)  
 Kernel 5.14.0-70.13.1.el9\_0.x86\_64  
 Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux;  
 Fortran: Version 2023.0 of Intel Fortran Compiler Compiler for Linux;  
 Parallel: Yes  
 Firmware: HPE BIOS Version v1.30 03/01/2023 released Mar-2023  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant ML110 Gen11**

(1.80 GHz, Intel Xeon Gold 6421N)

SPECspeed®2017\_fp\_base = 199

SPECspeed®2017\_fp\_peak = 199

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Apr-2023  
**Hardware Availability:** May-2023  
**Software Availability:** Dec-2022

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	32	109	541	<b><u>109</u></b>	<b><u>540</u></b>	109	539	32	109	541	<b><u>109</u></b>	<b><u>540</u></b>	109	539
607.cactuBSSN_s	32	66.4	251	<b><u>66.3</u></b>	<b><u>251</u></b>	66.3	252	32	66.4	251	<b><u>66.3</u></b>	<b><u>251</u></b>	66.3	252
619.lbm_s	32	<b><u>36.1</u></b>	<b><u>145</u></b>	35.9	146	36.1	145	32	<b><u>36.1</u></b>	<b><u>145</u></b>	35.9	146	36.1	145
621.wrf_s	32	<b><u>68.4</u></b>	<b><u>193</u></b>	68.3	194	68.5	193	32	<b><u>68.4</u></b>	<b><u>193</u></b>	68.3	194	68.5	193
627.cam4_s	32	<b><u>86.3</u></b>	<b><u>103</u></b>	86.4	103	86.3	103	32	86.0	103	87.0	102	<b><u>86.2</u></b>	<b><u>103</u></b>
628.pop2_s	32	112	106	<b><u>112</u></b>	<b><u>106</u></b>	112	106	32	112	106	<b><u>112</u></b>	<b><u>106</u></b>	112	106
638.imagick_s	32	<b><u>38.1</u></b>	<b><u>379</u></b>	38.0	380	38.1	378	32	<b><u>38.1</u></b>	<b><u>379</u></b>	38.0	380	38.1	378
644.nab_s	32	60.2	290	60.1	291	<b><u>60.1</u></b>	<b><u>291</u></b>	32	60.2	290	60.1	291	<b><u>60.1</u></b>	<b><u>291</u></b>
649.fotonik3d_s	32	92.1	99.0	91.7	99.4	<b><u>91.8</u></b>	<b><u>99.3</u></b>	32	92.1	99.0	91.7	99.4	<b><u>91.8</u></b>	<b><u>99.3</u></b>
654.roms_s	32	72.6	217	72.8	216	<b><u>72.7</u></b>	<b><u>216</u></b>	32	72.6	217	72.8	216	<b><u>72.7</u></b>	<b><u>216</u></b>

SPECspeed®2017\_fp\_base = **199**

SPECspeed®2017\_fp\_peak = **199**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
tuned-adm profile was set to Throughput-Performance using "tuned-adm profile throughput-performance"
perf-bias for all the CPUs is set using "cpupower set -b 0"
```

## Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH = "/home/CPU2017/lib/intel64:/home/CPU2017/je5.0.1-64"
MALLOCONF = "retain:true"
OMP_STACKSIZE = "192M"
```

## General Notes

```
Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Redhat Enterprise Linux 8.0
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant ML110 Gen11**

(1.80 GHz, Intel Xeon Gold 6421N)

**SPECspeed®2017\_fp\_base = 199**

**SPECspeed®2017\_fp\_peak = 199**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Apr-2023

**Hardware Availability:** May-2023

**Software Availability:** Dec-2022

## Platform Notes

The system ROM used for this result contains Intel microcode version 0x2b0001b0 for the Intel Xeon Gold 6421N processor.

BIOS Configuration:

Workload Profile set to General Peak Frequency Compute  
Intel Hyper-Threading set to Disabled  
Memory Patrol Scrubbing set to Disabled  
Intel DMI Link Frequency set to Gen2 Speed  
Minimum Processor Idle Power Package C-State set to No Package State  
Adjacent Sector Prefetch set to Disabled  
Last Level Cache (LLC) Prefetch set to Enabled  
Last Level Cache (LLC) Dead Line Allocation set to Disabled  
Dead Block Predictor set to Enabled  
Numa Group Size Optimization set to flat  
Enhanced Processor Performance Profile set to Aggressive  
Thermal Configuration set to Maximum Cooling  
Workload Profile set to Custom

Sysinfo program /home/CPU2017/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost.localdomain Sun Apr 2 23:53:30 2023

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 250 (250-6.el9\_0)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent\_hugepage
18. /sys/kernel/mm/transparent\_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

-----  
1. uname -a  
Linux localhost.localdomain 5.14.0-70.13.1.el9\_0.x86\_64 #1 SMP PREEMPT Thu Apr 14 12:42:38 EDT 2022 x86\_64  
x86\_64 x86\_64 GNU/Linux  
-----

-----  
2. w  
23:53:30 up 3 min, 1 user, load average: 0.01, 0.03, 0.00  
USER TTY LOGIN@ IDLE JCPU PCPU WHAT  
-----

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant ML110 Gen11**

(1.80 GHz, Intel Xeon Gold 6421N)

**SPECspeed®2017\_fp\_base = 199**

**SPECspeed®2017\_fp\_peak = 199**

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Apr-2023  
**Hardware Availability:** May-2023  
**Software Availability:** Dec-2022

## Platform Notes (Continued)

```
root pts/0 23:52 7.00s 0.83s 0.00s -bash
```

-----  
3. Username

From environment variable \$USER: root

-----  
4. ulimit -a

```
real-time non-blocking time (microseconds, -R) unlimited
core file size (blocks, -c) 0
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 1029902
max locked memory (kbytes, -l) 64
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 1029902
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited
```

-----  
5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize 28
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@pts/0
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags -c
ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=32 --tune base,peak -o all --define
drop_caches fpspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=32 --tune base,peak --output_format all
--define drop_caches --nopower --runmode speed --tune base:peak --size refspeed fpspeed --nopreenv
--note-preenv --logfile $SPEC/tmp/CPU2017.004/templogs/preenv.fpspeed.004.0.log --lognum 004.0
--from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/CPU2017
```

-----  
6. /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) Gold 6421N
vendor_id       : GenuineIntel
cpu family      : 6
model           : 143
stepping        : 7
microcode       : 0x2b0001b0
bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores       : 32
siblings        : 32
1 physical ids (chips)
32 processors (hardware threads)
physical id 0: core ids 0-31
physical id 0: apicids
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant ML110 Gen11**

(1.80 GHz, Intel Xeon Gold 6421N)

**SPECspeed®2017\_fp\_base = 199**

**SPECspeed®2017\_fp\_peak = 199**

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Apr-2023  
**Hardware Availability:** May-2023  
**Software Availability:** Dec-2022

## Platform Notes (Continued)

0, 2, 4, 6, 8, 10, 12, 14, 16, 18, 20, 22, 24, 26, 28, 30, 32, 34, 36, 38, 40, 42, 44, 46, 48, 50, 52, 54, 56, 58, 60, 62

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

### 7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         46 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                32
On-line CPU(s) list:   0-31
Vendor ID:             GenuineIntel
BIOS Vendor ID:       Intel(R) Corporation
Model name:            Intel(R) Xeon(R) Gold 6421N
BIOS Model name:      Intel(R) Xeon(R) Gold 6421N
CPU family:            6
Model:                 143
Thread(s) per core:    1
Core(s) per socket:    32
Socket(s):             1
Stepping:              7
BogoMIPS:              3600.00
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                        lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                        nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                        ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                        sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                        lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                        invpcid_single cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
                        vmni flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2
                        erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
                        clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
                        xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                        split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts
                        avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq
                        avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect
                        cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig
                        arch_lbr avx512_fp16 flush_l1d arch_capabilities
Virtualization:        VT-x
L1d cache:             1.5 MiB (32 instances)
L1i cache:             1 MiB (32 instances)
L2 cache:              64 MiB (32 instances)
L3 cache:              60 MiB (1 instance)
NUMA node(s):         1
NUMA node0 CPU(s):    0-31
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:    Not affected
Vulnerability Mds:     Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds:    Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant ML110 Gen11**

(1.80 GHz, Intel Xeon Gold 6421N)

**SPECspeed®2017\_fp\_base = 199**

**SPECspeed®2017\_fp\_peak = 199**

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Apr-2023  
**Hardware Availability:** May-2023  
**Software Availability:** Dec-2022

## Platform Notes (Continued)

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	1.5M	12	Data	1	64	1	64
L1i	32K	1M	8	Instruction	1	64	1	64
L2	2M	64M	16	Unified	2	2048	1	64
L3	60M	60M	15	Unified	3	65536	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 1 nodes (0)
node 0 cpus: 0-31
node 0 size: 257515 MB
node 0 free: 256661 MB
node distances:
node 0
0: 10
```

9. /proc/meminfo

```
MemTotal: 263695688 kB
```

10. who -r

```
run-level 3 Apr 2 23:50
```

11. Systemd service manager version: systemd 250 (250-6.el9\_0)

```
Default Target Status
multi-user running
```

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd chronyd crond dbus-broker firewalld getty@ irqbalance kdump lvm2-monitor mdmonitor microcode nis-domainname rhsmcertd rsyslog selinux-autorelabel-mark sshd sssd systemd-network-generator tuned udisks2
enabled-runtime	systemd-remount-fs
disabled	blk-availability chrony-wait console-getty cpupower debug-shell kvm_stat man-db-restart-cache-update nftables powertop rdisc rhsm rhsm-facts rpmdb-rebuild serial-getty@ sshd-keygen@ systemd-boot-check-no-failures systemd-pstore systemd-sysext
indirect	sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo

13. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=(hd1,gpt2)/vmlinuz-5.14.0-70.13.1.el9_0.x86_64
root=/dev/mapper/rhel-root
ro
resume=/dev/mapper/rhel-swap
rd.lvm.lv=rhel/root
rd.lvm.lv=rhel/swap
```

14. cpupower frequency-info

```
analyzing CPU 0:
Unable to determine current policy
boost state support:
Supported: yes
Active: yes
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant ML110 Gen11**

(1.80 GHz, Intel Xeon Gold 6421N)

SPECspeed®2017\_fp\_base = 199

SPECspeed®2017\_fp\_peak = 199

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Apr-2023

**Hardware Availability:** May-2023

**Software Availability:** Dec-2022

## Platform Notes (Continued)

-----  
15. tuned-adm active  
Current active profile: throughput-performance  
-----

16. sysctl  
kernel.numa\_balancing 0  
kernel.randomize\_va\_space 2  
vm.compaction\_proactiveness 20  
vm.dirty\_background\_bytes 0  
vm.dirty\_background\_ratio 10  
vm.dirty\_bytes 0  
vm.dirty\_expire\_centisecs 3000  
vm.dirty\_ratio 40  
vm.dirty\_writeback\_centisecs 500  
vm.dirtytime\_expire\_seconds 43200  
vm.extfrag\_threshold 500  
vm.min\_unmapped\_ratio 1  
vm.nr\_hugepages 0  
vm.nr\_hugepages\_mempolicy 0  
vm.nr\_overcommit\_hugepages 0  
vm.swappiness 10  
vm.watermark\_boost\_factor 15000  
vm.watermark\_scale\_factor 10  
vm.zone\_reclaim\_mode 0  
-----

17. /sys/kernel/mm/transparent\_hugepage  
defrag always defer+madvise [madvise] never  
enabled [always] madvise never  
hpage\_pmd\_size 2097152  
shmem\_enabled always within\_size advise [never] deny force  
-----

18. /sys/kernel/mm/transparent\_hugepage/khugepaged  
alloc\_sleep\_millisecs 60000  
defrag 1  
max\_ptes\_none 511  
max\_ptes\_shared 256  
max\_ptes\_swap 64  
pages\_to\_scan 4096  
scan\_sleep\_millisecs 10000  
-----

19. OS release  
From /etc/\*-release /etc/\*-version  
os-release Red Hat Enterprise Linux 9.0 (Plow)  
redhat-release Red Hat Enterprise Linux release 9.0 (Plow)  
system-release Red Hat Enterprise Linux release 9.0 (Plow)  
-----

20. Disk information  
SPEC is set to: /home/CPU2017  
Filesystem Type Size Used Avail Use% Mounted on  
/dev/mapper/rhel-home xfs 148G 107G 42G 73% /home  
-----

21. /sys/devices/virtual/dmi/id  
Vendor: HPE  
Product: ProLiant ML110 Gen11  
-----

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant ML110 Gen11**

(1.80 GHz, Intel Xeon Gold 6421N)

**SPECspeed®2017\_fp\_base = 199**

**SPECspeed®2017\_fp\_peak = 199**

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Apr-2023  
**Hardware Availability:** May-2023  
**Software Availability:** Dec-2022

## Platform Notes (Continued)

Product Family: ProLiant  
Serial: CNX2230TMQ

### 22. dmidecode

Additional information from dmidecode 3.3 follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

8x Hynix HMC88MEB113N 32 GB 2 rank 4800, configured at 4400

### 23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: HPE  
BIOS Version: 1.30  
BIOS Date: 03/01/2023  
BIOS Revision: 1.30  
Firmware Revision: 1.10

## Compiler Version Notes

=====  
C | 619.lbm\_s(base, peak) 638.imagick\_s(base, peak) 644.nab\_s(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====  
C++, C, Fortran | 607.cactuBSSN\_s(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====  
Fortran | 603.bwaves\_s(base, peak) 649.fotonik3d\_s(base, peak) 654.roms\_s(base, peak)  
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====  
Fortran, C | 621.wrf\_s(base, peak) 627.cam4\_s(base, peak) 628.pop2\_s(base, peak)  
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.





# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant ML110 Gen11

(1.80 GHz, Intel Xeon Gold 6421N)

SPECspeed®2017\_fp\_base = 199

SPECspeed®2017\_fp\_peak = 199

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Apr-2023

**Hardware Availability:** May-2023

**Software Availability:** Dec-2022

## Base Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Base Portability Flags

603.bwaves\_s: -DSPEC\_LP64

607.cactuBSSN\_s: -DSPEC\_LP64

619.lbm\_s: -DSPEC\_LP64

621.wrf\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian

627.cam4\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG

628.pop2\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian

-assume byterecl

638.imagick\_s: -DSPEC\_LP64

644.nab\_s: -DSPEC\_LP64

649.fotonik3d\_s: -DSPEC\_LP64

654.roms\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math

-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp

-DSPEC\_OPENMP -Wno-implicit-int -mprefer-vector-width=512

-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Fortran benchmarks:

-m64 -Wl,-z,muldefs -DSPEC\_OPENMP -xsapphirerapids -Ofast

-ffast-math -flto -mfpmath=sse -funroll-loops

-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs

-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Benchmarks using both Fortran and C:

-m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant ML110 Gen11**

(1.80 GHz, Intel Xeon Gold 6421N)

**SPECspeed®2017\_fp\_base = 199**

**SPECspeed®2017\_fp\_peak = 199**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Apr-2023

**Hardware Availability:** May-2023

**Software Availability:** Dec-2022

## Base Optimization Flags (Continued)

Benchmarks using both Fortran and C (continued):

```
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP -Wno-implicit-int
-mprefer-vector-width=512 -nostandard-realloc-lhs -align array32byte
-auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

## Peak Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

619.lbm\_s: basepeak = yes

638.imagick\_s: basepeak = yes

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant ML110 Gen11

(1.80 GHz, Intel Xeon Gold 6421N)

SPECspeed®2017\_fp\_base = 199

SPECspeed®2017\_fp\_peak = 199

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Apr-2023

Hardware Availability: May-2023

Software Availability: Dec-2022

## Peak Optimization Flags (Continued)

644.nab\_s: basepeak = yes

Fortran benchmarks:

603.bwaves\_s: basepeak = yes

649.fotonik3d\_s: basepeak = yes

654.roms\_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf\_s: basepeak = yes

```
627.cam4_s: -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

628.pop2\_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

607.cactuBSSN\_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-SPR-rev1.1.html>

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-SPR-rev1.1.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2023-04-02 14:23:30-0400.

Report generated on 2023-05-23 17:30:34 by CPU2017 PDF formatter v6716.

Originally published on 2023-05-09.