



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 339

PowerEdge R760xa (Intel Xeon Gold 6548Y+)

SPECspeed®2017_fp_peak = 340

CPU2017 License: 6573


Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2023

Hardware Availability: Dec-2023

Software Availability: Dec-2022

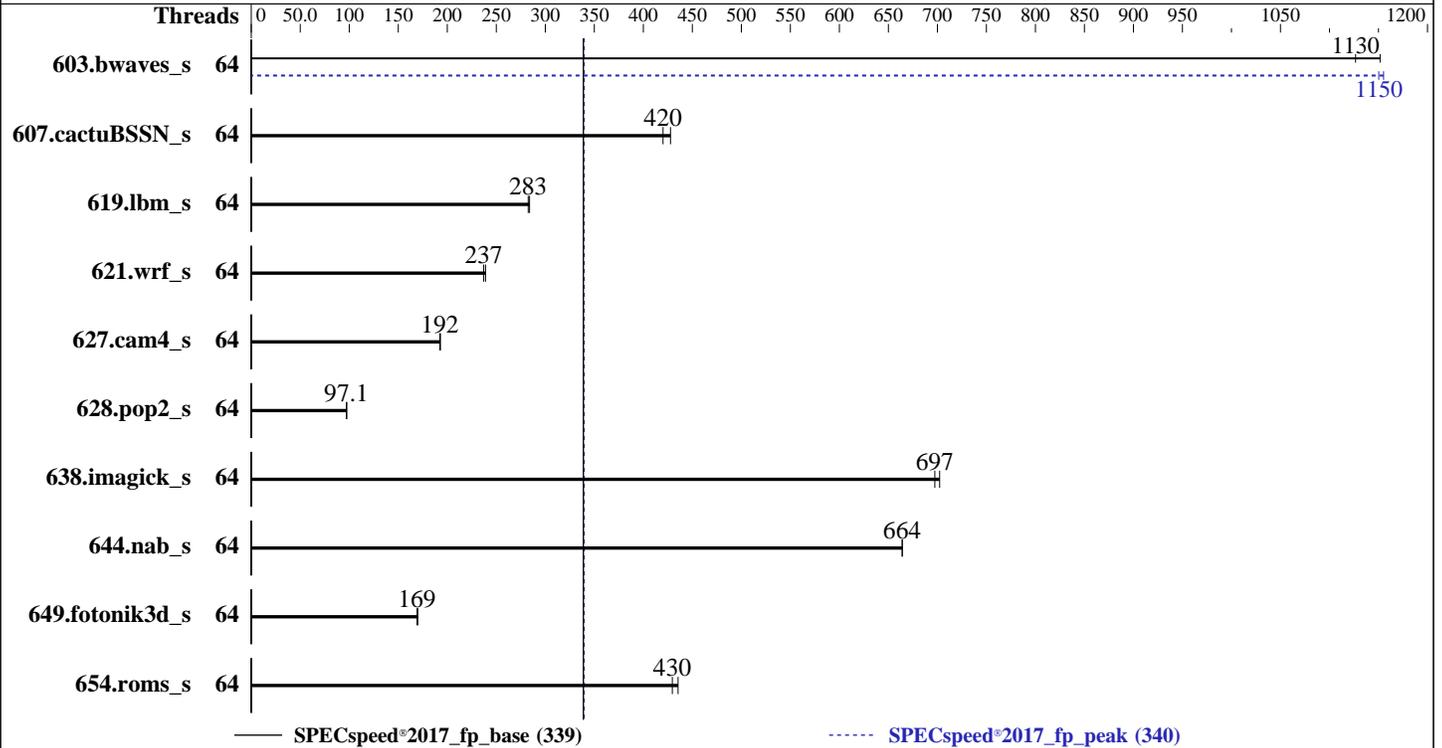

Hardware

CPU Name: Intel Xeon Gold 6548Y+
 Max MHz: 4100
 Nominal: 2500
 Enabled: 64 cores, 2 chips
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 60 MB I+D on chip per chip
 Other: None
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-5600B-R, running at 5200)
 Storage: 60 GB on tmpfs
 Other: Cooling: DLC

Software

OS: SUSE Linux Enterprise Server 15 SP4
 5.14.21-150400.22-default
 Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;
 Parallel: Yes
 Firmware: Version 2.0.0 released Nov-2023
 File System: tmpfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017_fp_base = 339

PowerEdge R760xa (Intel Xeon Gold 6548Y+)

SPECSpeed®2017_fp_peak = 340

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Dec-2023
Hardware Availability: Dec-2023
Software Availability: Dec-2022

Results Table

Benchmark	Base						Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	64	51.2	1150	<u>52.4</u>	<u>1130</u>			64	51.1	1160	<u>51.3</u>	<u>1150</u>		
607.cactuBSSN_s	64	39.0	428	<u>39.7</u>	<u>420</u>			64	39.0	428	<u>39.7</u>	<u>420</u>		
619.lbm_s	64	<u>18.5</u>	<u>283</u>	18.4	284			64	<u>18.5</u>	<u>283</u>	18.4	284		
621.wrf_s	64	<u>55.8</u>	<u>237</u>	55.3	239			64	<u>55.8</u>	<u>237</u>	55.3	239		
627.cam4_s	64	<u>46.1</u>	<u>192</u>	45.9	193			64	<u>46.1</u>	<u>192</u>	45.9	193		
628.pop2_s	64	122	97.5	<u>122</u>	<u>97.1</u>			64	122	97.5	<u>122</u>	<u>97.1</u>		
638.imagick_s	64	<u>20.7</u>	<u>697</u>	20.5	702			64	<u>20.7</u>	<u>697</u>	20.5	702		
644.nab_s	64	26.3	664	<u>26.3</u>	<u>664</u>			64	26.3	664	<u>26.3</u>	<u>664</u>		
649.fotonik3d_s	64	53.6	170	<u>53.9</u>	<u>169</u>			64	53.6	170	<u>53.9</u>	<u>169</u>		
654.roms_s	64	<u>36.7</u>	<u>430</u>	36.2	435			64	<u>36.7</u>	<u>430</u>	36.2	435		

SPECSpeed®2017_fp_base = **339**

SPECSpeed®2017_fp_peak = **340**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH =
"/mnt/ramdisk/cpu2017-1.1.9-ic2023.2.3/lib_2023.0/intel64:/mnt/ramdisk/cpu2017-1.1.9-ic2023.2.3/je5.0.1-64"
MALLOCONF = "retain:true"
OMP_STACKSIZE = "192M"
```

General Notes

```
Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Redhat Enterprise Linux 8.0
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

```
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
```

Benchmark run from a 60 GB ramdisk created with the cmd: "mount -t tmpfs -o size=60G tmpfs /mnt/ramdisk"



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 339

PowerEdge R760xa (Intel Xeon Gold 6548Y+)

SPECspeed®2017_fp_peak = 340

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2023

Hardware Availability: Dec-2023

Software Availability: Dec-2022

Platform Notes

BIOS settings:

ADDC Setting : Disabled
DIMM Self Healing on
Uncorrectable Memory Error : Disabled

Logical Processor : Disabled
Virtualization Technology : Disabled
DCU Streamer Prefetcher : Disabled
Sub NUMA Cluster : 2-way Clustering
Optimizer Mode : Enabled

System Profile : Custom
CPU Power Management : Maximum Performance
C1E : Disabled
C States : Autonomous
Memory Patrol Scrub : Disabled
Energy Efficiency Policy : Performance
PCI ASPM L1 Link
Power Management : Disabled

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-ic2023.2.3/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Mon Dec 18 15:29:11 2023

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

1. uname -a
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)
x86_64 x86_64 x86_64 GNU/Linux

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 339

PowerEdge R760xa (Intel Xeon Gold 6548Y+)

SPECspeed®2017_fp_peak = 340

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Dec-2023
Hardware Availability: Dec-2023
Software Availability: Dec-2022

Platform Notes (Continued)

```
2. w
  15:29:11 up 2:11, 1 user, load average: 6.09, 5.49, 3.27
USER  TTY      FROM          LOGIN@   IDLE   JCPU   PCPU   WHAT
root  tty1    -             13:18   2:09m  1.18s  0.00s  /bin/bash ./dell-run-speccpu.sh speed
--define DL-BIOSinc=Dell-BIOS_Xeon-5.inc --define DL-BIOS-adddcD=1 --define DL-VERS=v4.8.5.1
--output_format html,pdf,txt --define DL-LQC=1
```

```
3. Username
   From environment variable $USER:  root
```

```
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size          (kbytes, -d) unlimited
scheduling priority    (-e) 0
file size              (blocks, -f) unlimited
pending signals        (-i) 4124080
max locked memory      (kbytes, -l) 64
max memory size        (kbytes, -m) unlimited
open files             (-n) 1024
pipe size              (512 bytes, -p) 8
POSIX message queues   (bytes, -q) 819200
real-time priority     (-r) 0
stack size             (kbytes, -s) unlimited
cpu time               (seconds, -t) unlimited
max user processes     (-u) 4124080
virtual memory         (kbytes, -v) unlimited
file locks             (-x) unlimited
```

```
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 34
login -- root
-bash
/bin/bash ./DELL_speed.sh
/bin/bash ./dell-run-main.sh speed
/bin/bash ./dell-run-main.sh speed
/bin/bash ./dell-run-speccpu.sh speed --define DL-BIOSinc=Dell-BIOS_Xeon-5.inc --define DL-BIOS-adddcD=1
--define DL-VERS=v4.8.5.1 --output_format html,pdf,txt --define DL-LQC=1
/bin/bash ./dell-run-speccpu.sh speed --define DL-BIOSinc=Dell-BIOS_Xeon-5.inc --define DL-BIOS-adddcD=1
--define DL-VERS=v4.8.5.1 --output_format html,pdf,txt --define DL-LQC=1
runcpu --nobuild --action validate --define default-platform-flags -c
ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=64 --tune base,peak -o all --define
drop_caches --define DL-BIOS-SNC=2 --iterations 2 --define DL-BIOSinc=Dell-BIOS_Xeon-5.inc --define
DL-BIOS-adddcD=1 --define DL-VERS=v4.8.5.1 --output_format html,pdf,txt --define DL-LQC=1 fpspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=64 --tune base,peak --output_format all
--define drop_caches --define DL-BIOS-SNC=2 --iterations 2 --define DL-BIOSinc=Dell-BIOS_Xeon-5.inc
--define DL-BIOS-adddcD=1 --define DL-VERS=v4.8.5.1 --output_format html,pdf,txt --define DL-LQC=1
--nopower --runmode speed --tune base:peak --size refspeed fpspeed --note-preenv --logfile
$SPEC/tmp/CPU2017.002/temlogs/preenv.fpspeed.002.0.log --lognum 002.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-ic2023.2.3
```

```
6. /proc/cpuinfo
model name      : INTEL(R) XEON(R) GOLD 6548Y+
vendor_id      : GenuineIntel
cpu family     : 6
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 339

PowerEdge R760xa (Intel Xeon Gold 6548Y+)

SPECspeed®2017_fp_peak = 340

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Dec-2023
Hardware Availability: Dec-2023
Software Availability: Dec-2022

Platform Notes (Continued)

```

model          : 207
stepping       : 2
microcode      : 0x21000200
bugs           : spectre_v1 spectre_v2 spec_store_bypass swappg
cpu cores      : 32
siblings       : 32
2 physical ids (chips)
64 processors (hardware threads)
physical id 0: core ids 0-31
physical id 1: core ids 0-31
physical id 0: apicids
0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62
physical id 1: apicids
128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,1
80,182,184,186,188,190
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

```

7. lscpu

From lscpu from util-linux 2.37.2:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         46 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                64
On-line CPU(s) list:   0-63
Vendor ID:             GenuineIntel
Model name:            INTEL(R) XEON(R) GOLD 6548Y+
CPU family:            6
Model:                 207
Thread(s) per core:    1
Core(s) per socket:    32
Socket(s):             2
Stepping:              2
BogoMIPS:              5000.00
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                      clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                      nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                      ds_cpl smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2
                      x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
                      abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 invpcid_single
                      cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase tsc_adjust bmi1 hle
                      avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
                      avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                      xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                      cqm_mbm_local avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts
                      avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq
                      avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect
                      cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig
                      arch_lbr avx512_fp16 amx_tile flush_lli arch_capabilities
L1d cache:            3 MiB (64 instances)
L1i cache:            2 MiB (64 instances)
L2 cache:             128 MiB (64 instances)
L3 cache:             120 MiB (2 instances)
NUMA node(s):         4
NUMA node0 CPU(s):    0,4,8,12,16,20,24,28,32,36,40,44,48,52,56,60
NUMA node1 CPU(s):    2,6,10,14,18,22,26,30,34,38,42,46,50,54,58,62

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 339

PowerEdge R760xa (Intel Xeon Gold 6548Y+)

SPECspeed®2017_fp_peak = 340

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Dec-2023
Hardware Availability: Dec-2023
Software Availability: Dec-2022

Platform Notes (Continued)

NUMA node2 CPU(s): 1,5,9,13,17,21,25,29,33,37,41,45,49,53,57,63
 NUMA node3 CPU(s): 3,7,11,15,19,23,27,31,35,39,43,47,51,55,59,61
 Vulnerability Itlb multihit: Not affected
 Vulnerability Lltf: Not affected
 Vulnerability Mds: Not affected
 Vulnerability Meltdown: Not affected
 Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
 Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
 Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
 Vulnerability Srbds: Not affected
 Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	3M	12	Data	1	64	1	64
L1i	32K	2M	8	Instruction	1	64	1	64
L2	2M	128M	16	Unified	2	2048	1	64
L3	60M	120M	15	Unified	3	65536	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)
 node 0 cpus: 0,4,8,12,16,20,24,28,32,36,40,44,48,52,56,60
 node 0 size: 257260 MB
 node 0 free: 247857 MB
 node 1 cpus: 2,6,10,14,18,22,26,30,34,38,42,46,50,54,58,62
 node 1 size: 258043 MB
 node 1 free: 257608 MB
 node 2 cpus: 1,5,9,13,17,21,25,29,33,37,41,45,49,53,57,63
 node 2 size: 258043 MB
 node 2 free: 257332 MB
 node 3 cpus: 3,7,11,15,19,23,27,31,35,39,43,47,51,55,59,61
 node 3 size: 257695 MB
 node 3 free: 257534 MB
 node distances:
 node 0 1 2 3
 0: 10 12 21 21
 1: 12 10 21 21
 2: 21 21 10 12
 3: 21 21 12 10

9. /proc/meminfo

MemTotal: 1055789204 kB

10. who -r

run-level 3 Dec 18 13:18

11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)

Default Target	Status
multi-user	running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	YaST2-Firstboot YaST2-Second-Stage apparmor auditd bluetooth cron display-manager getty@ haveged irqbalance iscsi issue-generator kbdsettings kdump kdump-early klog lvm2-monitor

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 339

PowerEdge R760xa (Intel Xeon Gold 6548Y+)

SPECspeed®2017_fp_peak = 340

CPU2017 License: 6573

Test Date: Dec-2023

Test Sponsor: Dell Inc.

Hardware Availability: Dec-2023

Tested by: Dell Inc.

Software Availability: Dec-2022

Platform Notes (Continued)

```

nsd postfix purge-kernels rollback rsyslog smartd sshd wicked wickedd-auto4 wickedd-dhcp4
wickedd-dhcp6 wickedd-nanny
enabled-runtime systemd-remount-fs
disabled accounts-daemon appstream-sync-cache autofs autoyast-initscripts blk-availability
bluetooth-mesh boot-sysctl ca-certificates chrony-wait chronyd console-getty cups
cups-browsed debug-shell ebttables exchange-bmc-os-info firewalld gpm grub2-once
haveged-switch-root hwloc-dump-hwdata ipmi ipmievd iscsi-init iscsid iscsiuiio
issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap nmb
ostree-remount rdisc rpcbind rpmconfigcheck rsyncd rtkit-daemon serial-getty@
smartd_generate_opts smb snmpd snmptrapd speech-dispatcherd systemd-boot-check-no-failures
systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd udisks2
upower
indirect wickedd

```

```

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
root=UUID=825c10fd-7ec5-4674-a94f-b7ae4890083d
splash=silent
mitigations=auto
quiet
security=apparmor
crashkernel=319M,high
crashkernel=72M,low

```

```

-----
14. cpupower frequency-info
analyzing CPU 0:
Unable to determine current policy
boost state support:
Supported: yes
Active: yes

```

```

-----
15. sysctl
kernel.numa_balancing 1
kernel.randomize_va_space 2
vm.compaction_proactiveness 20
vm.dirty_background_bytes 0
vm.dirty_background_ratio 10
vm.dirty_bytes 0
vm.dirty_expire_centisecs 3000
vm.dirty_ratio 20
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold 500
vm.min_unmapped_ratio 1
vm.nr_hugepages 0
vm.nr_hugepages_mempolicy 0
vm.nr_overcommit_hugepages 0
vm.swappiness 60
vm.watermark_boost_factor 15000
vm.watermark_scale_factor 10
vm.zone_reclaim_mode 0

```

```

-----
16. /sys/kernel/mm/transparent_hugepage
defrag always defer defer+madvice [madvice] never
enabled [always] madvice never
hpage_pmd_size 2097152

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 339

PowerEdge R760xa (Intel Xeon Gold 6548Y+)

SPECspeed®2017_fp_peak = 340

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Dec-2023
Hardware Availability: Dec-2023
Software Availability: Dec-2022

Platform Notes (Continued)

shmem_enabled always within_size advise [never] deny force

```
-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000
-----
```

```
-----
18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP4
-----
```

```
-----
19. Disk information
SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-ic2023.2.3
Filesystem Type Size Used Avail Use% Mounted on
tmpfs tmpfs 60G 4.1G 56G 7% /mnt/ramdisk
-----
```

```
-----
20. /sys/devices/virtual/dmi/id
Vendor: Dell Inc.
Product: PowerEdge R760xa
Product Family: PowerEdge
Serial: 1234567
-----
```

```
-----
21. dmidecode
Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
16x 00AD063200AD HMC94AGBRA181N 64 GB 2 rank 5600, configured at 5200
-----
```

```
-----
22. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: Dell Inc.
BIOS Version: 2.0.0
BIOS Date: 11/23/2023
BIOS Revision: 2.0
-----
```

Compiler Version Notes

```
=====
C | 619.lbm_s(base, peak) 638.imagick_s(base, peak) 644.nab_s(base, peak)
-----
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
-----
```

```
=====
C++, C, Fortran | 607.cactuBSSN_s(base, peak)
-----
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017_fp_base = 339

PowerEdge R760xa (Intel Xeon Gold 6548Y+)

SPECSpeed®2017_fp_peak = 340

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Dec-2023
Hardware Availability: Dec-2023
Software Availability: Dec-2022

Compiler Version Notes (Continued)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
Fortran | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak) 654.roms_s(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
Fortran, C | 621.wrf_s(base, peak) 627.cam4_s(base, peak) 628.pop2_s(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 339

PowerEdge R760xa (Intel Xeon Gold 6548Y+)

SPECspeed®2017_fp_peak = 340

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2023

Hardware Availability: Dec-2023

Software Availability: Dec-2022

Base Portability Flags (Continued)

638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Fortran benchmarks:

-m64 -Wl,-z,muldefs -DSPEC_OPENMP -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Benchmarks using both Fortran and C:

-m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Benchmarks using Fortran, C, and C++:

-m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP -Wno-implicit-int
-mprefer-vector-width=512 -nostandard-realloc-lhs -align array32byte
-auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Peak Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 339

PowerEdge R760xa (Intel Xeon Gold 6548Y+)

SPECspeed®2017_fp_peak = 340

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2023

Hardware Availability: Dec-2023

Software Availability: Dec-2022

Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

619.lbm_s: basepeak = yes

638.imagick_s: basepeak = yes

644.nab_s: basepeak = yes

Fortran benchmarks:

603.bwaves_s: -m64 -Wl,-z,muldefs -DSPEC_OPENMP -xsapphirerapids
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc

649.fotonik3d_s: basepeak = yes

654.roms_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf_s: basepeak = yes

627.cam4_s: basepeak = yes

628.pop2_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 339

PowerEdge R760xa (Intel Xeon Gold 6548Y+)

SPECspeed®2017_fp_peak = 340

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2023

Hardware Availability: Dec-2023

Software Availability: Dec-2022

Peak Optimization Flags (Continued)

607.cactuBSSN_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.6.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.6.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-12-18 02:29:11-0500.

Report generated on 2024-02-28 19:15:22 by CPU2017 PDF formatter v6716.

Originally published on 2024-02-27.